1. ALL RESISTANCE VALUES ARE IN OHMS, 0.1 WATT +/- 5%.
2. ALL CAPACITANCE VALUES ARE IN MICROFARADS.
3. ALL CRYSTALS & OSCILLATOR VALUES ARE IN HERTZ.

REV	ZONE	ECN	DESCRIPTION OF CHANGE	CK APPD / DATE	ENG APPD / DATE

SCHEM,MLB,M96
EVT
08/01/2008

Page (.csa)	Contents	Sync Date
1	Table of Contents	N/A N/A
2	System Block Diagram	WFERRY-WF 05/11/2006
3	Power Block Diagram	POWER 06/30/2005
4	CONFIGURATION OPTIONS	(N/A) (N/A)
5	Acoustic Cap BOM Config Tables	N/A N/A
6	Functional Test and No-Tests	(MASTER) (MASTER)
7	Power Aliases	WFERRY 06/15/2006
8	SIGNAL ALIAS /RESET	(MASTER) (MASTER)
9	CPU FSB	M97 02/04/2008
10	CPU Power & Ground	(MASTER) (MASTER)
11	CPU Decoupling & VID	MSARWAR 04/26/2006
12	eXtended Debug Port (XDP)	M97 02/04/2008
13	MCP CPU Interface	M97 02/04/2008
14	MCP Memory Interface	M97 02/04/2008
15	MCP Memory Misc	M97 02/04/2008
16	MCP PCIe Interfaces	M97 02/04/2008
17	MCP Ethernet & Graphics	M97 02/04/2008
18	MCP PCI & LPC	M97 02/04/2008
19	MCP SATA & USB	M97 02/04/2008
20	MCP HDA & MISC	M97 02/04/2008
21	MCP Power & Ground	M97 02/04/2008
22	MCP Standard Decoupling	M97 02/04/2008
23	MCP Graphics Support	M97 02/04/2008
24	SB Misc	M97 02/04/2008
25	FSB/DDR3 Vref Margining	BEN 01/15/2008
26	DDR3 Support	T18_MLB 01/30/2008
27	DDR3 DRAM Channel A (0-31)	(MASTER) (MASTER)
28	DDR3 DRAM Channel A (32-63)	
29	DDR3 DRAM Channel B (0-31)	(MASTER) (MASTER)
30	DDR3 DRAM Channel B (32-63)	
31	DDR BYPASSING 1	MEMORY 06/20/2005
32	DDR BYPASSING 2	MEMORY 06/20/2005
33	Memory Active Termination	M70 01/09/2007
34	Wireless M93 Connector	M70 01/09/2007
35	Hatch and Audio Connectors	(MASTER) (MASTER)
36	SATA Connectors	CHANGZHANG 02/05/2008
37	USB EXTERNAL CONNECTORS	M70 01/09/2007
38	IPD Connector	
39	SMC	M97 02/21/2008
40	SMC SUPPORT	M70 01/09/2007
41	LPC+SPI Debug Connector	CHANGZHANG 01/24/2008
42	M97 SMBUS CONNECTIONS	BEN 02/04/2008
43	Voltage Sensors	M70 01/09/2007
44	Current Sensing	YUNWU 02/04/2008
45	TEMPERATURE SENSORS	M70 01/09/2007
46	Fan	M70 01/09/2007
47	Sudden Motion Sensor (SMS)	M76_MLB 01/12/2007
48	SPI ROM	CHANGZHANG 02/15/2008
49	DC-In & Battery Connectors	M70 01/09/2007
50	IMVP6 CPU VCore Regulator	POWER 07/13/2005
51	MCP CORE REGULATOR	MINGJING 06/24/2008
52	1.8V LDO Supply	
53	1V05 S5 Power Supply	RXU_K20 05/21/2008
54	1.5V/0.75V Supplies	M70 01/09/2007
55	5V / 3.3V Power Supply	RXU_K20 05/21/2008
56	POWER SEQUENCING	YUAN.MA 02/04/2008
57	POWER FETS	YUAN.MA 02/04/2008
58	PBUS Supply/Battery Charger	M70 01/09/2007
59	LVDS,Camera Conn. and ALS Conn.	GPU 06/23/2006
60	DISPLAYPORT SUPPORT	NMARTIN 12/18/2007
61	DisplayPort Connector	M98_MLB 01/17/2008
62	LED Backlight Driver	(MASTER) (MASTER)
63	LCD Backlight Support	M97 02/04/2008
64	Additional CPU/GPU Decoupling	
65	CPU/FSB Constraints	M97 02/04/2008
66	Memory Constraints	M97 02/04/2008
67	MCP Constraints 1	M97 02/04/2008
68	MCP Constraints 2	M97 02/04/2008
69	SMC Constraints	M97 02/04/2008
70	M96 Power and Ground Nets	(MASTER) (MASTER)
71	M96 RULE DEFINITIONS	M97 02/04/2008

Schematic / PCB #'s

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
051-7631	1	SCHEM,MLB,M96	SCH	CRITICAL	
820-2375	1	PCBF,MLB,M96	PCB	CRITICAL	

DRAWING
TITLE=M96_MLB
ABBREV=DRAWING
LAST_MODIFIED=Fri Aug 1 09:54:13 2008

DIMENSIONS ARE IN MILLIMETERS
XX ±
X.XX ±
X.XXX ±
ANGLES ±
DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION

METRIC

DRAFTER		DESIGN CK	
ENG APPD		MFG APPD	
QA APPD		DESIGNER	
RELEASE		SCALE	NONE

MATERIAL/FINISH
NOTED AS
APPLICABLE

SIZE D

APPLE INC.

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

TITLE
SCHEM,MLB,M96

DRAWING NUMBER 051-7631
REV. 2.3.0

SHT 1 OF 71

WWW.AliSaler.Com

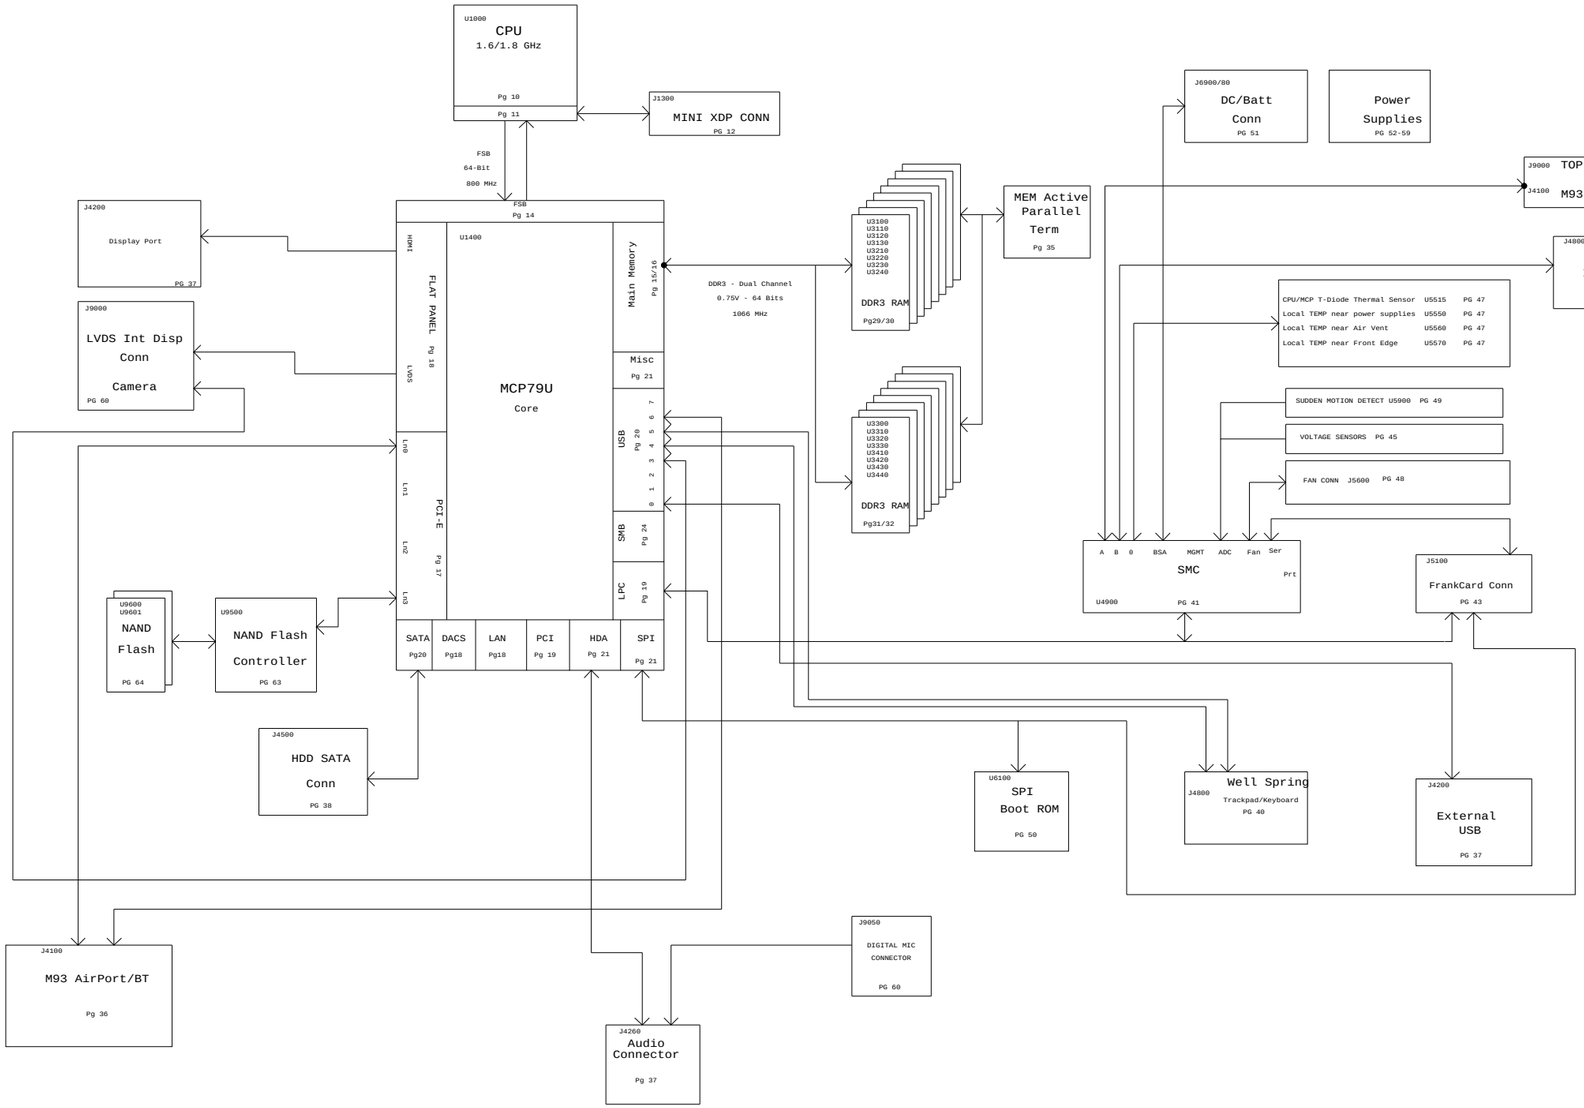

System Block Diagram

SYNC_MASTER=WFERRY-WF SYNC_DATE=05/11/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 2 OF 71	

WWW.AliSaler.Com

M96 POWER SYSTEM ARCHITECTURE

DC-JACK J6980 — PP18V5_DCIN — 6A FUSE F6900 — PP18V5_G3H_CHGR

PPDCIN_G3H_R, PPVBATT_G3H_R, PPBUSB_G3H, PPVIN_G3H_DCIN — D6901

PPDCIN_G3H → 3.425V G3HOT LTC3470A U6900 (PAGE 51) → PP3V42_G3H_REG (200 mA MAX CURRENT)

PP3V42_G3H_SMC → SMC PWRGD RN5VD30A-F U5000 (PAGE 42) → SMC_RESET_L

SMBUS_SMC_BSA_SCL, SMBUS_SMC_BSA_SDA

PBUS Supply/ BATTERY CHARGER ISL6258 U7900 (PAGE 59)

PPVBAT_G3H_CHGR_REG — 7A FUSE — PPBUSB_G3H — R7980 (0.002) — PBUSA_G3H

BATTERY 2S2P

Q7950 — CHGR_BGATE — BATT_POS_F

A R7930 — V Q5315

Q7853 — PP1V05_S0_FET — P1V05S0_EN

PBUSA_G3H → VIN 1.05V ENA1 (S5) P1V05_S5_EN → VOUT1 PP1V05_S5_REG (7 A MAX CURRENT)

ENA2 (S0) MCPCORES0_EN → VOUT2 PPMCPCORE_S0_REG (25 A MAX CURRENT)

ISL6236 U7200 (PAGE 53) PG1 P1V05_S5_PGOOD, PG2 MCPCORES0_PGOOD

MCP79U U1400

LPC_RESET* → DEBUG_RESET_L, SMC_LRESET_L

PCIE_RESET* → FC_RESET_L, PCA9557D_RESET_L, AIRPORT_RST_L, BKLT_PLT_RST_L

MCP_PS_PWRGD → PS_PWRGD

PWRBTN*, RSMRST*, CPU_RESET* → FSB_CPURST_L

CPU_PWRGD

CPU U1000 (PAGE 10) — PWRGOOD, RESET* → FSB_CPURST_L

PPVCORE_S0_CPU_REG → CPUVCORE VIN/VOUT → PPVCORE_S0_CPU (30 A MAX CURRENT)

IMVP_VR_ON → VR_ON; ISL6261CRZ U7100 (PAGE 52) PGOOD → VR_PWRGOOD_DELAY

U2850

MCP79U: SLP_S5*, PM_SLP_S4_L, SLP_S3*, PCI_RESET0*

PP3V3_S5_PWRCTL → Q7710 DELAY → R-100K C-NoStuff → P5V3_EN_L

DELAY R-1K C-0.47uF → P3V3S3_EN

DELAY R-5.1K C-0.47uF → DDRREG_EN

SMC_ADAPTER_PRESENT, WOW_EN

PM_SLP_S3_L, PM_WLAN_EN_L

P3V3S0_EN, P5VS0_EN, PBUSVSENS_EN

DELAY R-0 C-0.47uF → P1V05S0_EN (S0)

DELAY R-5.1k C-0.47uF → P1V8S0_EN (S0)

DELAY R-0 C-0.47uF → MCPDDR_EN (S0)

DELAY R-33k C-0.47uF → CPUVTTS0_EN (S0)

DELAY R-22k C-0,47uF → MCPCORES0_EN (S0)

=PPBUSB_G3H

IMVP_VR_ON → SMC U4900 (PAGE 41) PG8 SMC_PM_G2_EN

PP3V42_G3H_PWRCTL → Q7700 DELAY → R-100K C-NoStuff → PM_G2_P3V3S5_EN_L → PP3V3S5_EN_L (S5)

SMC_PM_G2_EN → DELAY R-5.1K C-0.47uF → P1V05_S5_EN

PP1V5_S0_VMON, PP1V05_S0_VMON → U7770 LTC2909 ADJ1, ADJ2 (PAGE 57) RST* → S0PGOOD_PWROK

MCPCORES0_PGOOD, P5V3V3_PGOOD, S0PGOOD_PWROK → ALL_SYS_PWRGD

Q7840 — PP5V_S0_FET — P5VS0_EN_L

PP5V_S3_REG (? A MAX CURRENT) → PP5V_S3

PP3V3_S5_REG (? A MAX CURRENT) → PP3V3_S5

Q7621 P5VS3_EN_L (S3), PP3V3S5_EN_L (S5)

TPS51120 U7600 (PAGE 60) PGOOD1,2 → P5V3V3_PGOOD

Q7810 — PP3V3_S3 — P3V3S3_EN_L

P1V8_S0_EN → 1.8V S0 TPS19918 U7360 (PAGE 54) → PP1V8_S0_REG (200 mA MAX)

PPVIN_S0_P1V8S0

Q7830 — PP3V3_S0_FET — P3V3S0_EN_L

P3V3_S5_PWRCTL, PP1V5_S5_PGOOD → U7740 TPS19918 (PAGE 57) → RSMRST_PWRGD

SMC U4900 (PAGE 41): ALL_SYS_PWRGD, PWRGD(P12), 200ms DLY, IMVP_VR_ON(P16), RSMRST_IN(P13), PWR_BUTTON(P90), P17(BTN_OUT), RSMRST_OUT(P15), PLT_RST*, RST*, SLP_S5_L(P95), SLP_S4_L(P94), SLP_S3_L(P93)

BATTERY ONLY: SMC_ONOFF_L

Q7801 — PP1V5_S3_P1V5S0FET — =PP1V5_S0_FET — MCPDDR_EN

PP0V75_S3_VTTREF

VIN 1.5V S5 VOUT1 → PP1V5_S3_REG (11 A MAX CURRENT)

S3 0.75V VOUT2 → PP0V75_S0_REG

TPS51116 U7500 (PAGE 55) → DDRREG_PGOOD

DDRREG_EN, DDRVTT_EN, MEM_VTT_EN_R, R2870

Power Block Diagram

SYNC_MASTER=POWER SYNC_DATE=06/30/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE NONE — SHT 3 OF 71

WWW.AliSaler.Com

BOMs

BOM NUMBER	BOM NAME	BOM OPTIONS
630-9734	PCBA,MLB,1.6GHZ,HY 2GB,SS CAP,M96	EEE_4DA,M96_COMMON,M96_HYNIX,M96_SS_CAP,CPU_1_6GHZ
630-9735	PCBA,MLB,1.6GHZ,HY 2GB,MU CAP,M96	EEE_4DB,M96_COMMON,M96_HYNIX,M96_MU_CAP,CPU_1_6GHZ
630-9514	PCBA,MLB,1.6GHZ,HY 2GB,TY CAP,M96	EEE_2AL,M96_COMMON,M96_HYNIX,M96_TY_CAP,CPU_1_6GHZ
630-9738	PCBA,MLB,1.8GHZ,HY 2GB,SS CAP,M96	EEE_4DC,M96_COMMON,M96_HYNIX,M96_SS_CAP,CPU_1_8GHZ
630-9516	PCBA,MLB,1.8GHZ,HY 2GB,MU CAP,M96	EEE_2AN,M96_COMMON,M96_HYNIX,M96_MU_CAP,CPU_1_8GHZ
630-9517	PCBA,MLB,1.8GHZ,HY 2GB,TY CAP,M96	EEE_2AP,M96_COMMON,M96_HYNIX,M96_TY_CAP,CPU_1_8GHZ

BOMOPTION Groups

BOM GROUP	BOM OPTIONS
M96_COMMON	ALTERNATE,COMMON,M96_COMMON1,M96_COMMON2,M96_COMMON3
M96_COMMON1	MCP_B02,BOOTROM_DEVEL,SMC_PRGRM,BOOT_MODE_USER,JTAG_ALLDEV,MEMRESET_HW,MEMRESET_MCP,VREFMRGN
M96_COMMON2	LPCPLUS,XDP,XDP_CONN
M96_COMMON3	MCP_CS1_NO
M96_HYNIX	DRAM_HYNIX
M96_MICRON	DRAM_MICRON,DRAM_SPD_2
M96_SS_CAP	SS_CAP_2_2UF,SS_CAP_10UF,SS_CAP_1UF
M96_MU_CAP	MU_CAP_2_2UF,MU_CAP_10UF,MU_CAP_1UF
M96_TY_CAP	TY_CAP_2_2UF,TY_CAP_10UF,TY_CAP_1UF

Bar Code Label / EEE #'s

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:4DA]	CRITICAL	EEE_4DA
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:4DB]	CRITICAL	EEE_4DB
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:2AL]	CRITICAL	EEE_2AL
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:4DC]	CRITICAL	EEE_4DC
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:2AN]	CRITICAL	EEE_2AN
826-4393	1	LBL,P/N LABEL,PCB,28MM X 6 MM	[EEE:2AP]	CRITICAL	EEE_2AP

Module Parts

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
337S3658	1	IC,PDC,QS,1.60GHZ,17W,1066,6M	U1000	CRITICAL	CPU_1_6GHZ
337S3659	1	IC,PDC,QS,1.80GHZ,17W,1066,6M	U1000	CRITICAL	CPU_1_8GHZ
338S0604	1	IC,GMCP,MCP79U-A01Q,27MMX27MM,BGA1588	U1400	CRITICAL	MCP_A01Q
338S0601	1	IC,GMCP,MCP79U-B01,27MMX27MM,BGA1588	U1400	CRITICAL	MCP_B01
338S0637	1	IC,GMCP,MCP79U-B02,27MMX27MM,BGA1588	U1400	CRITICAL	MCP_B02
335S0615	1	IC, 32MBIT 8-PIN SERIAL FLASH, WSON8	U6100	CRITICAL	BOOTROM_BLANK_4MB
341S2382	1	IC,EFI,BOOTROM DEVELOPMENT (UNLOCKED),M96	U6100	CRITICAL	BOOTROM_DEVEL
341S2326	1	IC,EFI,BOOTROM FINAL (LOCKED),M96	U6100	CRITICAL	BOOTROM_FINAL
338S0563	1	IC,SMC,HS8/2117	U4900	CRITICAL	SMC_BLANK
341S2327	1	IC,PRGRM,SMC (NEW),M96	U4900	CRITICAL	SMC_PRGRM
333S0476	4	HYNIX,DDR3,128M16,9x11.5	U3100,U3110,U3120,U3130	CRITICAL	DRAM_HYNIX
333S0476	4	HYNIX,DDR3,128M16,9x11.5	U3200,U3210,U3220,U3230	CRITICAL	DRAM_HYNIX
333S0476	4	HYNIX,DDR3,128M16,9x11.5	U3300,U3310,U3320,U3330	CRITICAL	DRAM_HYNIX
333S0476	4	HYNIX,DDR3,128M16,9x11.5	U3400,U3410,U3420,U3430	CRITICAL	DRAM_HYNIX
333S0475	4	MICRON,DDR3,128M16,9x11.5	U3100,U3110,U3120,U3130	CRITICAL	DRAM_MICRON
333S0475	4	MICRON,DDR3,128M16,9x11.5	U3200,U3210,U3220,U3230	CRITICAL	DRAM_MICRON
333S0475	4	MICRON,DDR3,128M16,9x11.5	U3300,U3310,U3320,U3330	CRITICAL	DRAM_MICRON
333S0475	4	MICRON,DDR3,128M16,9x11.5	U3400,U3410,U3420,U3430	CRITICAL	DRAM_MICRON
353S1938	1	IC,ISL6258,REV2,BAT CHGR, 28P QFN	U7900	CRITICAL	

Alternate Parts

PART NUMBER	ALTERNATE FOR PART NUMBER	REFERENCE DESIGNATOR(S)	DESCRIPTION	BOM OPTION
128S0093	128S0092	ALL	33UF 20% 16V DCASE	
376S0466	376S0410	ALL	Si4413 for Si4405	
740S0067	740S0028	ALL	0.5A OC FUSE	
104S0023	104S0018	ALL	1206 1/4W .002 OHM	
152S0684	152S0421	ALL	1.0UH,22A,10MOHM	
376S0627	376S0723	ALL	POWER NFET, 30V, 18A	
152S0905	152S0861	ALL	IND,IHLP4040CZ,0.68uH,18A	

CONFIGURATION OPTIONS

SYNC_MASTER=(N/A) SYNC_DATE=(N/A)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 4 OF 71

WWW.AliSaler.Com

1UF 0402 CAPACITOR VENDOR TABLES FOR ACOUSTICS

SAMSUNG

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0629	4	CAP, 1UF, 6.3V, 10%, 0402	C7547, C7606, C2564, C2565	CRITICAL	SS_CAP_1UF
138S0629	7	CAP, 1UF, 6.3V, 10%, 0402	C2566, C2567, C2616, C2617, C7598, C7599, C7600	CRITICAL	SS_CAP_1UF
138S0629	9	CAP, 1UF, 6.3V, 10%, 0402	C2000, C2706, C7297, C7453, C7608, C7609, C7631, C8708, C7652	CRITICAL	SS_CAP_1UF

MURATA

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0628	4	CAP, 1UF, 6.3V, 10%, 0402	C7547, C7606, C2564, C2565	CRITICAL	MU_CAP_1UF
138S0628	7	CAP, 1UF, 6.3V, 10%, 0402	C2566, C2567, C2616, C2617, C7598, C7599, C7600	CRITICAL	MU_CAP_1UF
138S0628	9	CAP, 1UF, 6.3V, 10%, 0402	C2000, C2706, C7297, C7453, C7608, C7609, C7631, C8708, C7652	CRITICAL	MU_CAP_1UF

TAIYO YUDEN

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0630	4	CAP, 1UF, 6.3V, 10%, 0402	C7547, C7606, C2564, C2565	CRITICAL	TY_CAP_1UF
138S0630	7	CAP, 1UF, 6.3V, 10%, 0402	C2566, C2567, C2616, C2617, C7598, C7599, C7600	CRITICAL	TY_CAP_1UF
138S0630	9	CAP, 1UF, 6.3V, 10%, 0402	C2000, C2706, C7297, C7453, C7608, C7609, C7631, C8708, C7652	CRITICAL	TY_CAP_1UF

2.2UF 0402 CAPACITOR VENDOR TABLES FOR ACOUSTICS

SAMSUNG

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1240, C1241, C1242, C1243, C1244, C1245, C1246, C1247, C1248, C1249	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1250, C1251, C1252, C1253, C1254, C1255, C1256, C1257, C1258, C1259	CRITICAL	SS_CAP_2_2UF
138S0632	8	CAP, 2.2UF, 6.3V, 20%, 0402	C1280, C1281, C1282, C1283, C1284, C1285, C1286, C1287	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8663, C8664, C8665, C8666, C8667, C8668, C8669	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8610, C8611, C8612, C8613, C8614, C8615, C8616, C8617, C8618, C8619	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8623, C8624, C8625, C8626, C8627, C8628, C8629	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8630, C8631, C8632, C8633, C8634, C8635, C8636, C8637, C8638, C8639	CRITICAL	SS_CAP_2_2UF
138S0632	12	CAP, 2.2UF, 6.3V, 20%, 0402	C1260, C1261, C1262, C1263, C1264, C1265, C1266, C1267, C1268, C1269, C1270, C1271	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8640, C8641, C8642, C8643, C8644, C8645, C8646, C8647, C8648, C8649	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8623, C8624, C8625, C8626, C8627, C8628, C8629	CRITICAL	SS_CAP_2_2UF
138S0632	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8665, C8610, C8611, C8612, C8613, C8615, C8616	CRITICAL	SS_CAP_2_2UF
138S0632	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8625, C8630, C8631, C8632, C8635, C8640, C8641	CRITICAL	SS_CAP_2_2UF
138S0632	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	SS_CAP_2_2UF
138S0632	7	CAP, 2.2UF, 6.3V, 20%, 0402	C2530, C2531, C2532, C2533, C2534, C2535, C2536	CRITICAL	SS_CAP_2_2UF
138S0632	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2568, C2651, C2652, C2653, C2655, C2660, C2662, C2642	CRITICAL	SS_CAP_2_2UF
138S0632	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2570, C2571, C2572, C2573, C2574, C2575, C2576, C2610	CRITICAL	SS_CAP_2_2UF
138S0632	3	CAP, 2.2UF, 6.3V, 20%, 0402	C4000, C7302, C7511	CRITICAL	SS_CAP_2_2UF

MURATA

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1240, C1241, C1242, C1243, C1244, C1245, C1246, C1247, C1248, C1249	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1250, C1251, C1252, C1253, C1254, C1255, C1256, C1257, C1258, C1259	CRITICAL	MU_CAP_2_2UF
138S0633	8	CAP, 2.2UF, 6.3V, 20%, 0402	C1280, C1281, C1282, C1283, C1284, C1285, C1286, C1287	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8663, C8664, C8665, C8666, C8667, C8668, C8669	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8610, C8611, C8612, C8613, C8614, C8615, C8616, C8617, C8618, C8619	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8623, C8624, C8625, C8626, C8627, C8628, C8629	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8630, C8631, C8632, C8633, C8634, C8635, C8636, C8637, C8638, C8639	CRITICAL	MU_CAP_2_2UF
138S0633	12	CAP, 2.2UF, 6.3V, 20%, 0402	C1260, C1261, C1262, C1263, C1264, C1265, C1266, C1267, C1268, C1269, C1270, C1271	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8640, C8641, C8642, C8643, C8644, C8645, C8646, C8647, C8648, C8649	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8625, C8630, C8631, C8632, C8635, C8640, C8641	CRITICAL	MU_CAP_2_2UF
138S0633	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8665, C8610, C8611, C8612, C8613, C8615, C8616	CRITICAL	MU_CAP_2_2UF
138S0633	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8625, C8630, C8631, C8632, C8635, C8640, C8641	CRITICAL	MU_CAP_2_2UF
138S0633	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	MU_CAP_2_2UF
138S0633	7	CAP, 2.2UF, 6.3V, 20%, 0402	C2530, C2531, C2532, C2533, C2534, C2535, C2536	CRITICAL	MU_CAP_2_2UF
138S0633	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2568, C2651, C2652, C2653, C2655, C2660, C2662, C2642	CRITICAL	MU_CAP_2_2UF
138S0633	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2570, C2571, C2572, C2573, C2574, C2575, C2576, C2610	CRITICAL	MU_CAP_2_2UF
138S0633	3	CAP, 2.2UF, 6.3V, 20%, 0402	C4000, C7302, C7511	CRITICAL	MU_CAP_2_2UF

TAIYO YUDEN

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1240, C1241, C1242, C1243, C1244, C1245, C1246, C1247, C1248, C1249	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C1250, C1251, C1252, C1253, C1254, C1255, C1256, C1257, C1258, C1259	CRITICAL	TY_CAP_2_2UF
138S0634	8	CAP, 2.2UF, 6.3V, 20%, 0402	C1280, C1281, C1282, C1283, C1284, C1285, C1286, C1287	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8663, C8664, C8665, C8666, C8667, C8668, C8669	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8610, C8611, C8612, C8613, C8614, C8615, C8616, C8617, C8618, C8619	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8623, C8624, C8625, C8626, C8627, C8628, C8629	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8630, C8631, C8632, C8633, C8634, C8635, C8636, C8637, C8638, C8639	CRITICAL	TY_CAP_2_2UF
138S0634	12	CAP, 2.2UF, 6.3V, 20%, 0402	C1260, C1261, C1262, C1263, C1264, C1265, C1266, C1267, C1268, C1269, C1270, C1271	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8640, C8641, C8642, C8643, C8644, C8645, C8646, C8647, C8648, C8649	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8625, C8630, C8631, C8632, C8635, C8640, C8641	CRITICAL	TY_CAP_2_2UF
138S0634	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8660, C8661, C8662, C8665, C8610, C8611, C8612, C8613, C8615, C8616	CRITICAL	TY_CAP_2_2UF
138S0634	10	CAP, 2.2UF, 6.3V, 20%, 0402	C8620, C8621, C8622, C8625, C8630, C8631, C8632, C8635, C8640, C8641	CRITICAL	TY_CAP_2_2UF
138S0634	8	CAP, 2.2UF, 6.3V, 20%, 0402	C8642, C8643, C8645, C8646, C8660, C8661, C8662, C8665	CRITICAL	TY_CAP_2_2UF
138S0634	7	CAP, 2.2UF, 6.3V, 20%, 0402	C2530, C2531, C2532, C2533, C2534, C2535, C2536	CRITICAL	TY_CAP_2_2UF
138S0634	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2568, C2651, C2652, C2653, C2655, C2660, C2662, C2642	CRITICAL	TY_CAP_2_2UF
138S0634	8	CAP, 2.2UF, 6.3V, 20%, 0402	C2570, C2571, C2572, C2573, C2574, C2575, C2576, C2610	CRITICAL	TY_CAP_2_2UF
138S0634	3	CAP, 2.2UF, 6.3V, 20%, 0402	C4000, C7302, C7511	CRITICAL	TY_CAP_2_2UF

10UF 0603 CAPACITOR VENDOR TABLES FOR ACOUSTICS

SAMSUNG

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0626	10	CAP, 10UF, 6.3V, 20%, 0603	C1200, C1201, C1202, C1203, C1204, C1205, C1206, C1207, C1208, C1209	CRITICAL	SS_CAP_10UF
138S0626	10	CAP, 10UF, 6.3V, 20%, 0603	C1210, C1211, C1212, C1213, C1214, C1215, C1216, C1217, C1218, C1219	CRITICAL	SS_CAP_10UF
138S0626	10	CAP, 10UF, 6.3V, 20%, 0603	C1220, C1221, C1222, C1223, C1224, C1225, C1226, C1227, C1228, C1230	CRITICAL	SS_CAP_10UF
138S0626	3	CAP, 10UF, 6.3V, 20%, 0603	C1230, C1231, C1299	CRITICAL	SS_CAP_10UF
138S0626	8	CAP, 10UF, 6.3V, 20%, 0603	C4100, C4613, C8660, C7502, C7521, C7650, C7690, C8012	CRITICAL	SS_CAP_10UF
138S0626	5	CAP, 10UF, 6.3V, 20%, 0603	C7304, C7297, C7509, C7491, C7695	CRITICAL	SS_CAP_10UF

MURATA

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0625	10	CAP, 10UF, 6.3V, 20%, 0603	C1200, C1201, C1202, C1203, C1204, C1205, C1206, C1207, C1208, C1209	CRITICAL	MU_CAP_10UF
138S0625	10	CAP, 10UF, 6.3V, 20%, 0603	C1210, C1211, C1212, C1213, C1214, C1215, C1216, C1217, C1218, C1219	CRITICAL	MU_CAP_10UF
138S0625	10	CAP, 10UF, 6.3V, 20%, 0603	C1220, C1221, C1222, C1223, C1224, C1225, C1226, C1227, C1228, C1230	CRITICAL	MU_CAP_10UF
138S0625	3	CAP, 10UF, 6.3V, 20%, 0603	C1230, C1231, C1299	CRITICAL	MU_CAP_10UF
138S0625	8	CAP, 10UF, 6.3V, 20%, 0603	C4100, C4613, C8660, C7502, C7521, C7650, C7690, C8012	CRITICAL	MU_CAP_10UF
138S0625	5	CAP, 10UF, 6.3V, 20%, 0603	C7304, C7297, C7509, C7491, C7695	CRITICAL	MU_CAP_10UF

TAIYO YUDEN

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
138S0627	10	CAP, 10UF, 6.3V, 20%, 0603	C1200, C1201, C1202, C1203, C1204, C1205, C1206, C1207, C1208, C1209	CRITICAL	TY_CAP_10UF
138S0627	10	CAP, 10UF, 6.3V, 20%, 0603	C1210, C1211, C1212, C1213, C1214, C1215, C1216, C1217, C1218, C1219	CRITICAL	TY_CAP_10UF
138S0627	10	CAP, 10UF, 6.3V, 20%, 0603	C1220, C1221, C1222, C1223, C1224, C1225, C1226, C1227, C1228, C1230	CRITICAL	TY_CAP_10UF
138S0627	3	CAP, 10UF, 6.3V, 20%, 0603	C1230, C1231, C1299	CRITICAL	TY_CAP_10UF
138S0627	8	CAP, 10UF, 6.3V, 20%, 0603	C4100, C4613, C8660, C7502, C7521, C7650, C7690, C8012	CRITICAL	TY_CAP_10UF
138S0627	5	CAP, 10UF, 6.3V, 20%, 0603	C7304, C7297, C7509, C7491, C7695	CRITICAL	TY_CAP_10UF

Acoustic Cap BOM Config Tables

SYNC_MASTER=N/A SYNC_DATE=N/A

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 5 OF 71	

WWW.AliSaler.Com

Functional Test Points

NB NO_TESTS

These are normally testpoints but become NC

NO_TEST

Power Supply NO_TESTs

NO_TEST

CLOCK NO_TESTS

NO_TEST

LVDS NO_TESTS

NO_TEST

REQUIRED NETS

FUNC TEST - BATTERY CONNECTOR

x2	I647	TRUE	BATT_POS	49
x2	I646	TRUE	GND	
	I638	TRUE	SMC_BS_ALRT_L	39 40 49
	I644	TRUE	SMBUS_SMC_BSA_SCL	42 69
	I639	TRUE	SMBUS_SMC_BSA_SDA	42 69

FUNC TEST - DC-IN CONNECTOR

x6	I648	TRUE	PP18V5_DCIN	49 70
	I655	TRUE	ADAPTER_SENSE	49
x6	I706	TRUE	GND	

FUNC TEST - FAN CONNECTOR

	I666	TRUE	=PP5V_S0_FAN	7 46
	I667	TRUE	FAN_RT_PWM	46
	I669	TRUE	FAN_RT_TACH	46
	I714	TRUE	GND	

FUNC TEST - AIRPORT

	I741	TRUE	CK505_SRC_CLKREQ6_L	6
	I742	TRUE	PCIE_WAKE_L	6 16 34
	I743	TRUE	AIRPORT_RST_L	6 24 34
	I744	TRUE	=SMB_AIRPORT_CLK	6 34 42
	I745	TRUE	=SMB_AIRPORT_DATA	6 34 42
	I746	TRUE	GND	

FUNC TEST - MIC

	I747	TRUE	PP3V3_S0_MIC_F	59 70
	I748	TRUE	AUD_MIC_DATA_F	59
	I749	TRUE	AUD_MIC_CLK_F	59
	I750	TRUE	GND_MIC_F	59

FUNC TEST - AUDIO CONNECTOR

	I645	TRUE	HDA_SYNC	20 35 68
	I646	TRUE	HDA_BIT_CLK	20 35 68
	I735	TRUE	AUD_MIC_DATA	35 59
	I736	TRUE	HDA_SDOUT	20 35 68
	I737	TRUE	=PPVIN_S0_AUDIO	7 35
	I738	TRUE	HDA_SDIN0	20 35 68
	I740	TRUE	AUD_MIC_CLK	35 59
	I739	TRUE	PM_SLP_S3_L	20 34 35 39 56

FUNC TEST - IPD CONNECTOR

	I507	TRUE	SMC_LID	38 39 40
	I508	TRUE	PP3V42_G3H_IPD_F	38 70
	I509	TRUE	SMC_SYS_KBDLED	38 39
	I505	TRUE	SMC_SYS_LED	38 39
	I510	TRUE	=USB2_TPAD_N	8 38
	I512	TRUE	=USB2_TPAD_P	8 38
	I511	TRUE	SMC_ONOFF_L	6 38 39 40
	I513	TRUE	=USB2_IR_N	6 8 38
	I514	TRUE	=USB2_IR_P	6 8 38
	I515	TRUE	PP5V_S0_KBDLED_F	6 38 70
	I516	TRUE	PP5V_S3_TOPCASE_F	38 70
	I517	TRUE	=I2C_TPAD_SCL	38 42
	I518	TRUE	=I2C_TPAD_SDA	38 42
	I524	TRUE	SMC_ONOFF_L	6 38 39 40
	I519	TRUE	=USB2_IR_N	6 8 38
	I522	TRUE	=USB2_IR_P	6 8 38
	I674	TRUE	PP5V_S0_KBDLED_F	6 38 70
	I734	TRUE	LSOC_PRESS_H_R	38

FUNC TEST - M93 WIRELESS CONNECTOR

	I478	TRUE	AIRPORT_RST_L	6 24 34
	I475	TRUE	PCIE_WAKE_L	6 16 34
	I479	TRUE	CK505_SRC_CLKREQ6_L	6
	I478	TRUE	PCIE_CLK100M_MINI_N_F	34
	I476	TRUE	PCIE_CLK100M_MINI_P_F	34
	I477	TRUE	PCIE_E_D2R_N_F	34
	I480	TRUE	PCIE_E_D2R_P_F	34
	I483	TRUE	PCIE_E_R2D_C_N_F	6 34
	I484	TRUE	PCIE_E_R2D_C_P_F	6 34
	I482	TRUE	AIRPORT_RST_L	6 24 34
	I499	TRUE	=SMB_AIRPORT_DATA	6 34 42
	I500	TRUE	=SMB_AIRPORT_CLK	6 34 42
	I501	TRUE	PCIE_E_R2D_C_N_F	6 34
	I502	TRUE	PCIE_E_R2D_C_P_F	6 34
	I503	TRUE	PP3V3_S3_AP_AUX	34 70

NICE2HAVE NETS

FUNC TEST - Power Supplies

	I92	TRUE	PPVCORE_S0_CPU	7 70
	I454	TRUE	PP0V75_S0	7 70
	I455	TRUE	PP1V05_S0	7 70
	I457	TRUE	PP1V5_S0	7 70
	I460	TRUE	PP1V5_S3	7 70
	I459	TRUE	PP1V05_S5	7 70
	I458	TRUE	PPMCPCORE_S0	7 70
	I461	TRUE	PP5V_S0	7 70
	I466	TRUE	PP3V3_S0	7 70
	I463	TRUE	PP3V3_S3	7 70
	I462	TRUE	PP5V_S3	7 70
	I467	TRUE	PP3V3_S5	7 70
	I468	TRUE	PP3V42_G3H	7 70
	I474	TRUE	PP18V5_G3H	7 70
	I472	TRUE	PPDCIN_G3H	7 70
	I473	TRUE	PPBUS_G3H	7 70
	I471	TRUE	PPBUS_R_G3H	7 70
	I457	TRUE	PP1V8_S0	7 70

FUNC TEST - SATA HDD

	I751	TRUE	PP3V3_S0_HDD_F	36 70
	I752	TRUE	SATA_HDD_R2D_N	36 67
	I753	TRUE	SATA_HDD_R2D_P	36 67
	I754	TRUE	SATA_HDD_D2R_C_N	36 67
	I755	TRUE	SATA_HDD_D2R_C_P	36 67
	I756	TRUE	GND	

FUNC TEST - RIO HATCH CONNECTOR

	I716	TRUE	DP_ML_C_N<3..0>	61 67
	I717	TRUE	DP_ML_C_P<3..0>	61 67
	I718	TRUE	DP_AUX_CH_C_N	35 60 61 67
	I719	TRUE	DP_AUX_CH_C_P	35 60 61 67
	I720	TRUE	DP_CA_DET_Q	35 61
	I721	TRUE	HDMI_CEC	35 61
	I722	TRUE	DP_HPD_Q	35 61
	I723	TRUE	PP3V3_S0_DPPWR	35 61 70
	I725	TRUE	USB2_EXTA_F_P	35 37
	I726	TRUE	USB2_EXTA_F_N	35 37
	I727	TRUE	PP5V_S3_USB2_EXTA_F	35 37 70
	I728	TRUE	GND	

FUNC TEST - XDP/ITP CONNECTOR

	I693	TRUE	XDP_BPM_L<0..5>	9 12 65
	I690	TRUE	TP_XDP_OBSFN_B0	12
	I680	TRUE	TP_XDP_OBSFN_B1	12
	I681	TRUE	TP_XDP_OBSDATA_B0	12
	I683	TRUE	TP_XDP_OBSDATA_B1	12
	I682	TRUE	TP_XDP_OBSDATA_B2	12
	I684	TRUE	TP_XDP_OBSDATA_B3	12
	I685	TRUE	XDP_PWRGD	12
	I687	TRUE	XDP_OBS20	12
	I686	TRUE	SMBUS_MCP_0_DATA	12 20 42 68
	I688	TRUE	SMBUS_MCP_0_CLK	12 20 42 68
	I689	TRUE	XDP_TCK	9 12 65
	I691	TRUE	JTAG_MCP_TDO_CONN	12
	I696	TRUE	JTAG_MCP_TRST_L	12 20
	I692	TRUE	MCP_DEBUG<7..0>	12 18 68
	I694	TRUE	JTAG_MCP_TDI	12 20
	I695	TRUE	JTAG_MCP_TMS	12 20
	I698	TRUE	FSB_CLK_ITP_P	12 13 65
	I697	TRUE	FSB_CLK_ITP_N	12 13 65
	I699	TRUE	XDP_CPURST_L	12 65
	I700	TRUE	XDP_DBRESET_L	9 12 24
	I701	TRUE	XDP_TDO_CONN	12
	I760	TRUE	XDP_TRST_L	9 12 65
	I702	TRUE	XDP_TDI	9 12 65
	I703	TRUE	XDP_TMS	9 12 65
	I704	TRUE	=PP3V3_S0_XDP	7 12
	I705	TRUE	=PP1V05_S0_CPU	7 9 10 11 12

FUNC TEST - CAMERA USB, LVDS, ALS

x2	I654	TRUE	PP5V_S3_CAMERA_F	59 70
	I655	TRUE	USB2_CAMERA_F_P	59
	I656	TRUE	USB2_CAMERA_F_N	59
	I657	TRUE	LCDBKLT_RTN<1..6>	59 62
	I658	TRUE	LVDS_IG_A_DATA_N<0..2>	17 59 67
	I659	TRUE	LVDS_IG_A_DATA_P<0..2>	17 59 67
	I660	TRUE	PPVOUT_S0_LCDBKLT	59 62 70
	I661	TRUE	LVDS_IG_A_CLK_F_N	59 67
	I662	TRUE	LVDS_IG_A_CLK_F_P	59 67
	I663	TRUE	LVDS_IG_DDC_CLK	17 59
	I664	TRUE	LVDS_IG_DDC_DATA	17 59
	I665	TRUE	PP3V3_S0_LCD_F	59 70
x2	I666	TRUE	PP3V3_LCDVDD_SW_F	59 70
	I711	TRUE	=I2C_ALS_SDA	42 59
	I712	TRUE	=I2C_ALS_SCL	42 59
x10	I713	TRUE	GND	

x13 I822 TRUE GND

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

Functional Test and No-Tests

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 6 OF 71	

WWW.AliSaler.Com

"S0" RAILS

50 =PPVCORE_S0_CPU_REG
27 A
PPVCORE_S0_CPU 6 70
MIN_LINE_WIDTH=0.25 MM
MIN_NECK_WIDTH=0.20 MM
VOLTAGE=0.9V
MAKE_BASE=TRUE
=PPVCORE_S0_CPU 10 11 64

51 =PPMCPCORE_S0_REG
11.551 A
PPMCPCORE_S0 6 70
MIN_LINE_WIDTH=0.25 MM
MIN_NECK_WIDTH=0.20 MM
VOLTAGE=0.9V
MAKE_BASE=TRUE
=PPVCORE_S0_MCP 21 22
=PPVCORE_S0_MCP_VSENSE 43

54 =PP0V75_S0_REG
1.075 A
PP0V75_S0 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=0.75V
MAKE_BASE=TRUE
=PPVTT_S0_VTTCLAMP 57
=PP0V75_S0_MEM_VTT_A 33
=PP0V75_S0_MEM_VTT_B 33

57 =PP1V05_S0_FET
7.047 A
PP1V05_S0 6 70
MIN_LINE_WIDTH=0.2 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.05V
MAKE_BASE=TRUE
=PP1V05_S0_CPU 6 9 10 11 12
=PP1V05_S0_MCP_AVDD_UF 22
=PP1V05_S0_MCP_FSB 8 13 21 22
=PP1V05_S0_MCP_HDMI_VDD 17 23
=PP1V05_S0_MCP_PEX_DVDD 7 22
=PP1V05_S0_MCP_PLL_UF 22
=PP1V05_S0_MCP_SATA_DVDD 19 22
=PP1V05_S0_SMC_LS 40
=PP1V05_S0_VMON 56

57 =PP1V5_S0_FET
5.027 A
PP1V5_S0 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.5V
MAKE_BASE=TRUE
=PP1V5_S0_CPU 10 11
=PP1V5_S0_VMON 56
=PP1V8R1V5_S0_MCP_MEM 15 22 66

52 =PP1V8_S0_REG
19 mA
PP1V8_S0 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.8V
MAKE_BASE=TRUE
=PP3V3R1V8_S0_MCP_IFP_VDD 17 23

57 =PP3V3_S0_FET
2.046 A
PP3V3_S0 6 70
MIN_LINE_WIDTH=0.2 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.3V
MAKE_BASE=TRUE
=PP3V3_S0_DPCONN 61
=PP3V3_S0_FAN 46
=PP3V3_S0_IMVP 50
=PP3V3_S0_LCD 59
=PP3V3_S0_LCDBKLT 62
=PP3V3_S0_MCP 20 21 22
=PP3V3_S0_MCP_GPIO 17 18 20
=PP3V3_S0_MCP_PLL_UF 22
=PP3V3_S0_MCP_VPLL_UF 23
=PP3V3_S0_PWRCTL 24 56
=PP3V3_S0_SMBUS_SMC_0_S0 42
=PP3V3_S0_THRM_SNR 45
=PP3V3_S0_VMON 56
=PP3V3_S0_XDP 6 12
=PPVIN_S0_P1V8S0 52
=PP3V3_S0_LPCPLUS 41
=PP3V3_S0_HDD 36
=PP3V3_S0_SMBUS_SMC_B_S0 42
=PP3V3_S0_SMBUS_MCP_0 42
=PP3V3R1V5_S0_MCP_HDA 20 22
=PP3V3_S0_SMC_LS 40
=PP3V3_S0_MIC 59

57 =PP5V_S0_FET
562 mA
PP5V_S0 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=5V
MAKE_BASE=TRUE
=PP5V_S0_CPU_IMVP 50
=PP5V_S0_DP_AUX_MUX 60
=PP5V_S0_FAN 6 46
=PP5V_S0_KBDLED 38
=PP5V_S0_LPCPLUS 41

"S3" RAILS

54 =PP0V75_S3_VTTREF
1.075 A
PP0V75_S3 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=0.75V
MAKE_BASE=TRUE
=PPVTT_S3_DDR_BUF 25

54 =PP1V5_S3_REG
12.984 A
PP1V5_S3 6 70
MIN_LINE_WIDTH=0.6 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.8V
MAKE_BASE=TRUE
=PP1V5_S3_MEM_A 27 28 31 33
=PP1V5_S3_MEM_B 29 30 32 33
=PP1V5_S3_P1V5S0FET 57
=PP1V5_S3_MEMRESET 26

57 =PP3V3_S3_FET
315 mA
PP3V3_S3 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.3V
MAKE_BASE=TRUE
=PP3V3_S3_BT 34
=PP3V3_S3_SMBUS_SMC_A_S3 42
=PP3V3_S3_SMC 40
=PP3V3_S3_SMS 47
=PP3V3_S3_VREFMRGN 25
=PP3V3_S3_SMBUS_SMC_MGMT 42
=PP3V3_S3_DDRREG 54
=PP3V3_S3_MCPREG 51
=PP3V3_S3_MCP_GPIO 20

55 =PP5V_S3_REG
3.134 A
PP5V_S3 6 70
MIN_LINE_WIDTH=0.6 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=5V
MAKE_BASE=TRUE
=PP5V_S3_CAMERA 59
=PP5V_S3_MCPDDRFET 57
=PP5V_S3_P1V05S0FET 57
=PP5V_S3_TOPCASE 38
=PP5V_S3_VTTCLAMP 57
=PP5V_S3_1V5S30V75S0 54
=PP5V_S3_EXTUSB 37
=PP5V_S3_P5VS0FET 57
=PP5V_S3_MCPREG 51

"RMGT" RAILS

57 =PP3V3_RMGT_FET
PP3V3_RMGT 70
MIN_LINE_WIDTH=0.2 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.3V
MAKE_BASE=TRUE
=PP3V3_ENET_MCP_RMGT 17 22

57 =PP1V05_RMGT_FET
PP1V05_RMGT 70
MIN_LINE_WIDTH=0.2 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.05V
MAKE_BASE=TRUE
=PP1V05_ENET_MCP_RMGT 17 22
=PP1V05_ENET_MCP_PLL_MAC 22

"S5" RAILS

53 =PP1V05_S5_REG
7.368 A
PP1V05_S5 6 70
MIN_LINE_WIDTH=0.25 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=1.05V
MAKE_BASE=TRUE
=PP1V05_S5_MCP_VDD_AUXC 21 22
=PP1V05_S5_P1V05S0FET 57
=PP1V05_RMGT_P1V05RMGTFET 57

55 =PP3V3_S5_REG
4.011 A
PP3V3_S5 6 70
MIN_LINE_WIDTH=0.6 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.3V
MAKE_BASE=TRUE
=PP3V3_S5_AIRPORT_AUX 34
=PP3V3_S5_LCD 59
=PP3V3_S5_MCP 21 22
=PP3V3_S5_MCPPWRGD 24
=PP3V3_S5_MCP_GPIO 17 19 20
=PP3V3_S5_P1V05FET 57
=PP3V3_S5_P3V3S0FET 57
=PP3V3_S5_P3V3S3FET 57
=PP3V3_S5_PWRCTL 56
=PP3V3_S5_ROM 41 48
=PP3V3_S5_SMBUS_MCP_1 42
=PP3V3_S5_MEMRESET 26
=PP3V3_S5_P3V3RMGTFET 57
=PP3V3_S5_P1V05RMGTFET 57

"G3H" RAILS

49 24 =PP3V42_G3H_REG
165 mA
PP3V42_G3H 6 70
MIN_LINE_WIDTH=0.3 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.42V
MAKE_BASE=TRUE
=PP3V42_G3H_SMC 39 40
=PP3V42_G3H_SMCVREF 40
=PP3V42_G3H_SMBUS_SMC_BSA 42
=PP3V42_G3H_IPD 38
=PP3V42_G3H_SMCUSBMUX 37
=PP3V42_G3H_CHGR 58
=PP3V42_G3H_LPCPLUS 41

58 49 =PP18V5_G3H_CHGR
PP18V5_G3H 6 70
MIN_LINE_WIDTH=0.3 MM
MIN_NECK_WIDTH=0.2 MM
VOLTAGE=18.5V
MAKE_BASE=TRUE

49 =PPDCIN_G3H
PPDCIN_G3H 6 70
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM
VOLTAGE=18.5V
MAKE_BASE=TRUE
=PPVIN_G3H_P3V42G3H 49

58 44 =PPBUSA_G3H
13 A
PPBUS_R_G3H 6 70
MIN_LINE_WIDTH=0.5MM
MIN_NECK_WIDTH=0.25MM
VOLTAGE=12.6V
MAKE_BASE=TRUE
=PPVIN_S5_CPU_IMVP 50
=PPVIN_S5_1V5S30V75S0 54
=PPVIN_S0_MCPCORES0 51
=PPVIN_S5_1V05 53

58 44 =PPBUSB_G3H
6.207 A
PPBUS_G3H 6 70
MIN_LINE_WIDTH=0.4 MM
MIN_NECK_WIDTH=0.25 MM
VOLTAGE=12.6V
MAKE_BASE=TRUE
=PPVIN_S3_5VS3 55
=PPVIN_S5_3V3S5 55
=PPVIN_S0_AUDIO 6 35
=PPVIN_G3H_DCIN 49
=PPBUS_S0_LCDBKLT 63
=PPBUS_G3HRS5 43

PEX & SATA AVDD/DVDD aliases

70 22 PP1V05_S0_MCP_PEX_AVDD
MAKE_BASE=TRUE
206 mA (A01)
=PP1V05_S0_MCP_PEX_AVDD0 16
=PP1V05_S0_MCP_PEX_AVDD1 16
206 mA (A01)

22 7 =PP1V05_S0_MCP_PEX_DVDD
57 mA (A01)
=PP1V05_S0_MCP_PEX_DVDD0 16
=PP1V05_S0_MCP_PEX_DVDD1 16
57 mA (A01)

Power Aliases

SYNC_MASTER=WFERRY SYNC_DATE=06/15/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 7 OF 71	

WWW.AliSaler.Com

EMI SPRING CLIPS

PLACE CLIPS PER MCO ON TOPSIDE NEAR BATTERY CONNECTOR J6900



BOSSES

Z0900 4.5OD2.0H-M1.6X0.35
Z0901 4.5OD2.0H-M1.6X0.35
Z0902 4.5OD2.0H-M1.6X0.35
Z0903 4.5OD2.0H-M1.6X0.35
Z0904 4.5OD2.0H-M1.6X0.35

STANDOFFS

Z0910 STDOFF-4.00D2.4H-0.5-THNP
Z0911 STDOFF-4.00D2.4H-0.5-THNP
Z0912 STDOFF-4.00D2.4H-0.5-THNP

SMC ALIASES

NO-CONNECT UNUSED SMC INTERFACE PORTS

		NO_TEST	
SMC_PA0	NC_SMC_PA0	TRUE	MAKE_BASE=TRUE
SMC_PA1	NC_SMC_PA1	TRUE	MAKE_BASE=TRUE
ESTARLDO_EN	NC_ESTARLDO_EN	TRUE	MAKE_BASE=TRUE
SMC_P26	NC_SMC_P26	TRUE	MAKE_BASE=TRUE
SMC_P41	NC_SMC_P41	TRUE	MAKE_BASE=TRUE
SMC_BIL_BUTTON_L	NC_SMC_P67	TRUE	MAKE_BASE=TRUE
SMC_GFX_OVERTEMP_L	NC_SMC_GFX_OVERTEMP_L	TRUE	MAKE_BASE=TRUE
SMC_EXCARD_OC_L	NC_EXCARD_OC_L	TRUE	MAKE_BASE=TRUE
SMC_P24	NC_SMC_P24	TRUE	MAKE_BASE=TRUE
SMC_EXCARD_CP	NC_SMC_EXCARD_CP	TRUE	MAKE_BASE=TRUE
ALS_RIGHT	NC_ALS_RIGHT	TRUE	MAKE_BASE=TRUE
ALS_GAIN	NC_ALS_GAIN	TRUE	MAKE_BASE=TRUE
SMC_FAN_1_CTL	NC_SMC_FAN_1_CTL	TRUE	MAKE_BASE=TRUE
SMC_FAN_2_CTL	NC_SMC_FAN_2_CTL	TRUE	MAKE_BASE=TRUE
SMC_FAN_3_CTL	NC_SMC_FAN_3_CTL	TRUE	MAKE_BASE=TRUE
SMC_FAN_1_TACH	NC_SMC_FAN_1_TACH	TRUE	MAKE_BASE=TRUE
SMC_FAN_2_TACH	NC_SMC_FAN_2_TACH	TRUE	MAKE_BASE=TRUE
SMC_FAN_3_TACH	NC_SMC_FAN_3_TACH	TRUE	MAKE_BASE=TRUE
SMC_EXCARD_PWR_EN	NC_SMC_RSTGATE_L	TRUE	MAKE_BASE=TRUE
ISENSE_CAL_EN	NC_ISENSE_CAL_EN	TRUE	MAKE_BASE=TRUE
SMC_FWE	NC_SMC_FWE	TRUE	MAKE_BASE=TRUE
SMC_ANALOG_ID	NC_SMC_ANALOG_ID	TRUE	MAKE_BASE=TRUE
ALS_LEFT	NC_ALS_LEFT	TRUE	MAKE_BASE=TRUE
SMC_NB_DDR_ISENSE	NC_SMC_NB_DDR_ISENSE	TRUE	MAKE_BASE=TRUE
SMC_P10	NC_SMC_P10	TRUE	MAKE_BASE=TRUE
SMC_PA5	NC_SMC_PA5	TRUE	MAKE_BASE=TRUE
SMC_GPU_ISENSE	NC_SMC_GPU_ISENSE	TRUE	MAKE_BASE=TRUE

SMC_IG_THROTTLE_L — SMC_GFX_THROTTLE_L
SMC_SMS_INT_L — =SMC_SMS_INT
SMC_ADAPTER_EN — SMC_ADAPTER_PRESENT

PCI-E ALIASES

UNUSED GPU LANES

=PEG_D2R_N<15:0>	NC_PEG_D2R_N<15:0>	NO_TEST=TRUE MAKE_BASE=TRUE
=PEG_D2R_P<15:0>	NC_PEG_D2R_P<15:0>	NO_TEST=TRUE MAKE_BASE=TRUE
=PEG_R2D_C_N<15:0>	NC_PEG_R2D_C_N<15:0>	NO_TEST=TRUE MAKE_BASE=TRUE
=PEG_R2D_C_P<15:0>	NC_PEG_R2D_C_P<15:0>	NO_TEST=TRUE MAKE_BASE=TRUE
PEG_PRSNT_L	TP_PEG_PRSNT_L	MAKE_BASE=TRUE
PEG_CLKREQ_L	TP_PEG_CLKREQ_L	MAKE_BASE=TRUE
PEG_CLK100M_P	TP_PEG_CLK100M_P	MAKE_BASE=TRUE
PEG_CLK100M_N	TP_PEG_CLK100M_N	MAKE_BASE=TRUE
EXTGPU_PWR_EN	TP_EXTGPU_PWR_EN	MAKE_BASE=TRUE
EXTGPU_RESET_L	TP_EXTGPU_RESET_L	MAKE_BASE=TRUE

AIRPORT CARD AND TURBOMEM PRESENT SIGNAL

PCIE_MINI_PRSNT_L
PCIE_FC_PRSNT_L
MAKE_BASE=TRUE

HDA PULL-DOWN

UNUSED IPHS SIGNAL(FOR IPHONE JACK)

AUD_IPHS_SWITCH_EN

AUD_I2C_INT_L IS PU ON MCP PAGE

R0920 100K 5% 1/20W MF 201

DP HOTPLUG PULL-DOWN

HPLUG_DET2 — =DVI_HPD_GMUX_INT

R0940 20K 5% 1/20W MF 201

LAN ALIASES

UNUSED ETHERNET RG/MII INTERFACE

ENET_RXD<0>
ENET_RXD<1>
ENET_RXD<2>
ENET_RXD<3>
ENET_MDIO
ENET_RX_CTRL
ENET_CLK125M_TXCLK
MCP_MII_VREF
ENET_CLK125M_RXCLK
ENET_INTR_L

RP0930 10K 5% 1/32W 4X0201-HF
RP0931 10K 5% 1/32W 4X0201-HF
RP0932 10K 5% 1/32W 4X0201-HF

ENET_RESET_L	NC_ENET_RESET_L	MAKE_BASE=TRUE
MCP_CLK25M_BUF0_R	NC_MCP_CLK25M_BUF0_R	MAKE_BASE=TRUE
ENET_PWRDWN_L	NC_ENET_PWRDWN	MAKE_BASE=TRUE
ENET_MDC	NC_ENET_MDC	MAKE_BASE=TRUE
ENET_TX_CTRL	NC_ENEX_TX_CTRL	MAKE_BASE=TRUE
ENET_TXD<3..0>	NC_ENET_TXD<3..0>	MAKE_BASE=TRUE

GND
VOLTAGE=0V
MIN_NECK_WIDTH=0.20 MM
MIN_LINE_WIDTH=0.30 MM

DACS ALIASES

UNUSED CRT & TV-OUT INTERFACE

MCP_TV_DAC_RSET	NC_MCP_TV_DAC_RSET	NO_TEST=TRUE MAKE_BASE=TRUE
MCP_TV_DAC_VREF	NC_MCP_TV_DAC_VREF	NO_TEST=TRUE MAKE_BASE=TRUE
MCP_CLK27M_XTALIN	NC_MCP_CLK27M_XTALIN	NO_TEST=TRUE MAKE_BASE=TRUE
MCP_CLK27M_XTALOUT	NC_MCP_CLK27M_XTALOUT	NO_TEST=TRUE MAKE_BASE=TRUE
CRT_IG_R_C_PR	NC_CRT_IG_R_C_PR	NO_TEST=TRUE MAKE_BASE=TRUE
CRT_IG_G_Y_Y	NC_CRT_IG_G_Y_Y	NO_TEST=TRUE MAKE_BASE=TRUE
CRT_IG_B_COMP_PB	NC_CRT_IG_B_COMP_PB	NO_TEST=TRUE MAKE_BASE=TRUE
CRT_IG_HSYNC	NC_CRT_IG_HSYNC	NO_TEST=TRUE MAKE_BASE=TRUE
CRT_IG_VSYNC	NC_CRT_IG_VSYNC	NO_TEST=TRUE MAKE_BASE=TRUE

LVDS ALIASES

UNUSED LVDS SIGNALS

LVDS_IG_A_DATA_P<3>	NC_LVDS_IG_A_DATA_P3	NO_TEST=TRUE MAKE_BASE=TRUE
LVDS_IG_A_DATA_N<3>	NC_LVDS_IG_A_DATA_N3	NO_TEST=TRUE MAKE_BASE=TRUE
LVDS_IG_B_CLK_P	NC_LVDS_IG_B_CLK_P	NO_TEST=TRUE MAKE_BASE=TRUE
LVDS_IG_B_CLK_N	NC_LVDS_IG_B_CLK_N	NO_TEST=TRUE MAKE_BASE=TRUE
LVDS_IG_B_DATA_P<3:0>	NC_LVDS_IG_B_DATA_P<3:0>	NO_TEST=TRUE MAKE_BASE=TRUE
LVDS_IG_B_DATA_N<3:0>	NC_LVDS_IG_B_DATA_N<3:0>	NO_TEST=TRUE MAKE_BASE=TRUE

MISC NC MCP79 ALIASES

CPU_PECI_MCP	TP_CPU_PECI_MCP	
FW_PME_L	TP_FW_PME_L	MAKE_BASE=TRUE
ODD_PWR_EN_L	TP_ODD_PWR_EN_L	MAKE_BASE=TRUE

SATA ALIASES

UNUSED SATA ODD SIGNALS

SATA_ODD_R2D_C_P	TP_SATA_ODD_R2D_C_P	
SATA_ODD_R2D_C_N	TP_SATA_ODD_R2D_C_N	MAKE_BASE=TRUE
SATA_ODD_D2R_P	TP_SATA_ODD_D2R_P	MAKE_BASE=TRUE
SATA_ODD_D2R_N	TP_SATA_ODD_D2R_N	MAKE_BASE=TRUE

USB ALIASES

UNUSED USB PORTS

USB_EXTB_P	TP_USB_EXTB_P	
USB_EXTB_N	TP_USB_EXTB_N	MAKE_BASE=TRUE
USB_EXTC_P	TP_USB_EXTC_P	MAKE_BASE=TRUE
USB_EXTC_N	TP_USB_EXTC_N	MAKE_BASE=TRUE
USB_EXTD_P	TP_USB_EXTD_P	MAKE_BASE=TRUE
USB_EXTD_N	TP_USB_EXTD_N	MAKE_BASE=TRUE
USB_EXCARD_P	TP_USB_EXCARD_P	MAKE_BASE=TRUE
USB_EXCARD_N	TP_USB_EXCARD_N	MAKE_BASE=TRUE
USB_MINI_P	TP_USB_MINI_P	MAKE_BASE=TRUE
USB_MINI_N	TP_USB_MINI_N	MAKE_BASE=TRUE

EXTERNAL PORT A

=USB2_EXTA_P	USB_EXTA_P	MAKE_BASE=TRUE
=USB2_EXTA_N	USB_EXTA_N	MAKE_BASE=TRUE
=EXTAUSB_OC_L	USB_EXTA_OC_L	MAKE_BASE=TRUE

CAMERA

=USB2_CAMERA_P	USB_CAMERA_P	MAKE_BASE=TRUE
=USB2_CAMERA_N	USB_CAMERA_N	MAKE_BASE=TRUE

TRACKPAD(WELLSPRING)

=USB2_TPAD_P	USB_TPAD_P	MAKE_BASE=TRUE
=USB2_TPAD_N	USB_TPAD_N	MAKE_BASE=TRUE

IR

=USB2_IR_P	USB_IR_P	MAKE_BASE=TRUE
=USB2_IR_N	USB_IR_N	MAKE_BASE=TRUE

BT (M93)

=USB2_BT_P	USB_BT_P	MAKE_BASE=TRUE
=USB2_BT_N	USB_BT_N	MAKE_BASE=TRUE

CPU FSB FREQUENCY STRAPS

CPU_BSEL<0:2> — =MCP_BSEL<0:2>
MAKE_BASE=TRUE

BSEL<2..0>	FSB MHZ
0 0 0	266
0 0 1	133
0 1 0	200
0 1 1	(166)
1 0 0	333
1 0 1	100
1 1 0	(400)
1 1 1	(RSVD)

Extra FSB Pull-ups

Exist in MRB but not Intel designs. Here for CYA.
If found to be necessary, will move to page14.csa

=PP1V05_S0_MCP_FSB

R0995 220 5% 1/20W MF 201
R0997 200 5% 1/20W MF 201
R0999 150 5% 1/20W MF 201
R0996 62 5% 1/20W MF 201
R0998 150 5% 1/20W MF 201

CPU_DPRSTP_L
FSB_BREQ0_L
FSB_CPURST_L
CPU_INTR
CPU_NMI

MEM ALIASES

		NO_TEST	
TP_MEM_A_CLK4P	NC_MEM_A_CLK4P	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CLK4N	NC_MEM_A_CLK4N	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CLK3P	NC_MEM_A_CLK3P	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CLK3N	NC_MEM_A_CLK3N	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CS_L<2>	NC_MEM_A_CS_L<2>	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CS_L<3>	NC_MEM_A_CS_L<3>	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CKE<2>	NC_MEM_A_CKE<2>	TRUE	MAKE_BASE=TRUE
TP_MEM_A_CKE<3>	NC_MEM_A_CKE<3>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CLK4P	NC_MEM_B_CLK4P	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CLK4N	NC_MEM_B_CLK4N	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CLK3P	NC_MEM_B_CLK3P	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CLK3N	NC_MEM_B_CLK3N	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CS_L<2>	NC_MEM_B_CS_L<2>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CS_L<3>	NC_MEM_B_CS_L<3>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_ODT<2>	NC_MEM_B_ODT<2>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_ODT<3>	NC_MEM_B_ODT<3>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CKE<2>	NC_MEM_B_CKE<2>	TRUE	MAKE_BASE=TRUE
TP_MEM_B_CKE<3>	NC_MEM_B_CKE<3>	TRUE	MAKE_BASE=TRUE

SIGNAL ALIAS /RESET

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 8 OF 71	

WWW.AliSaler.Com

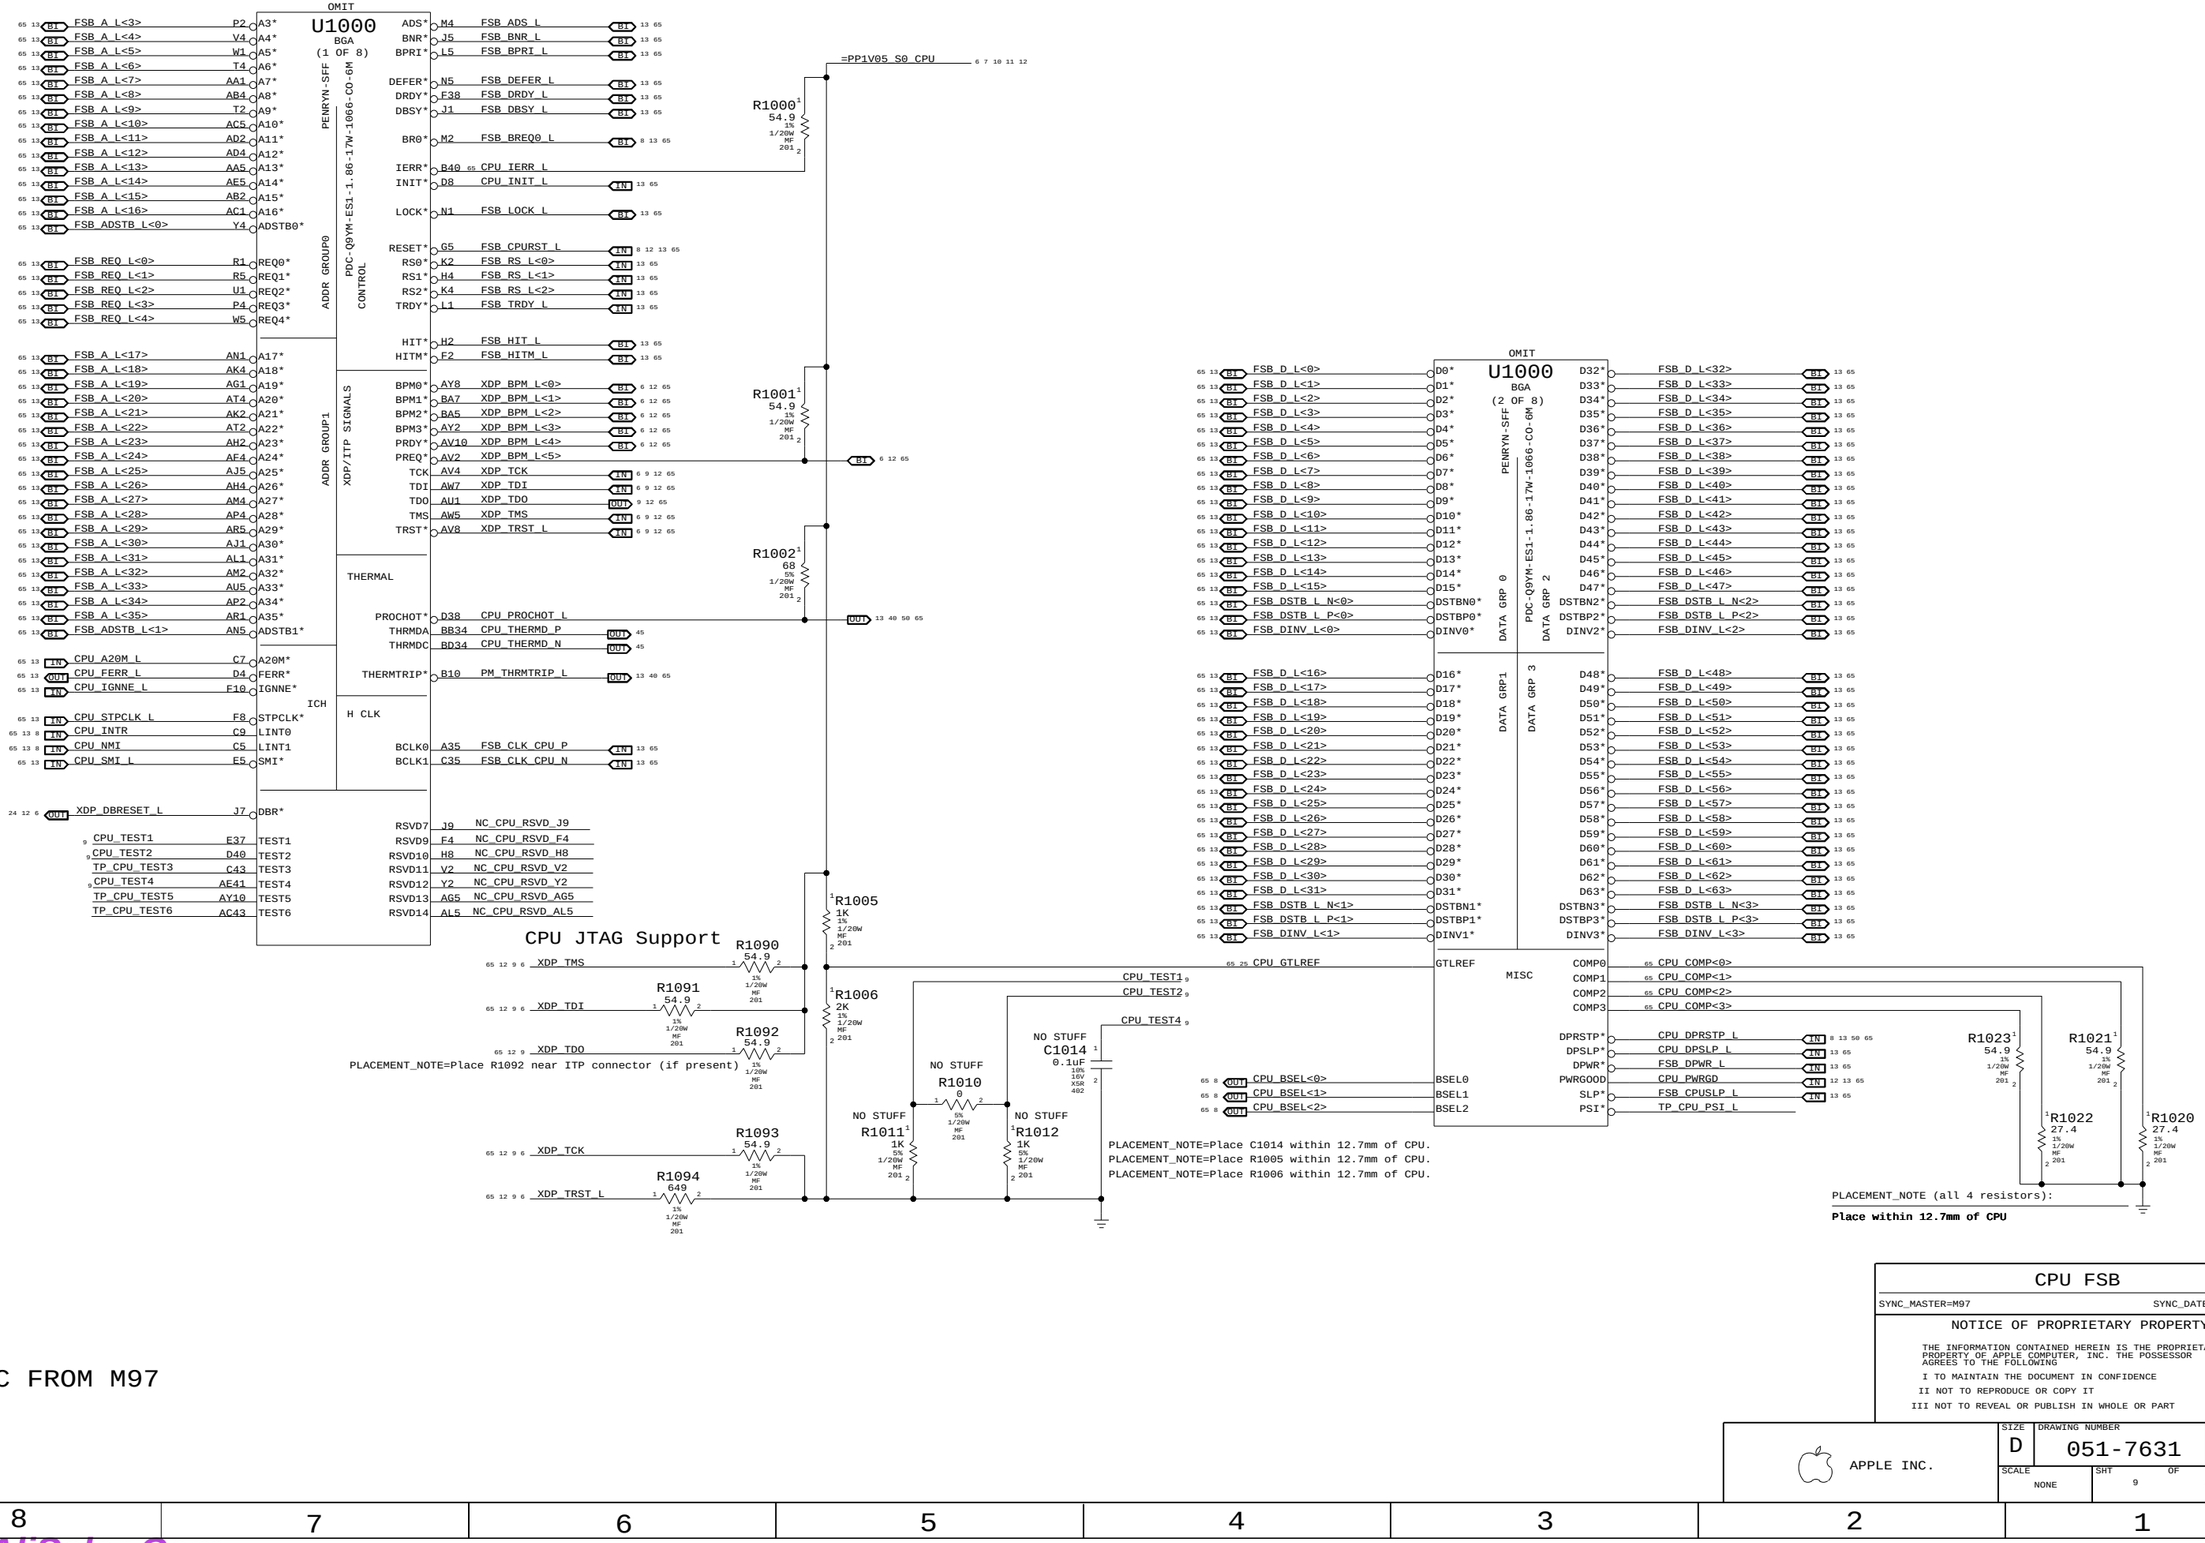

WWW.AliSaler.Com

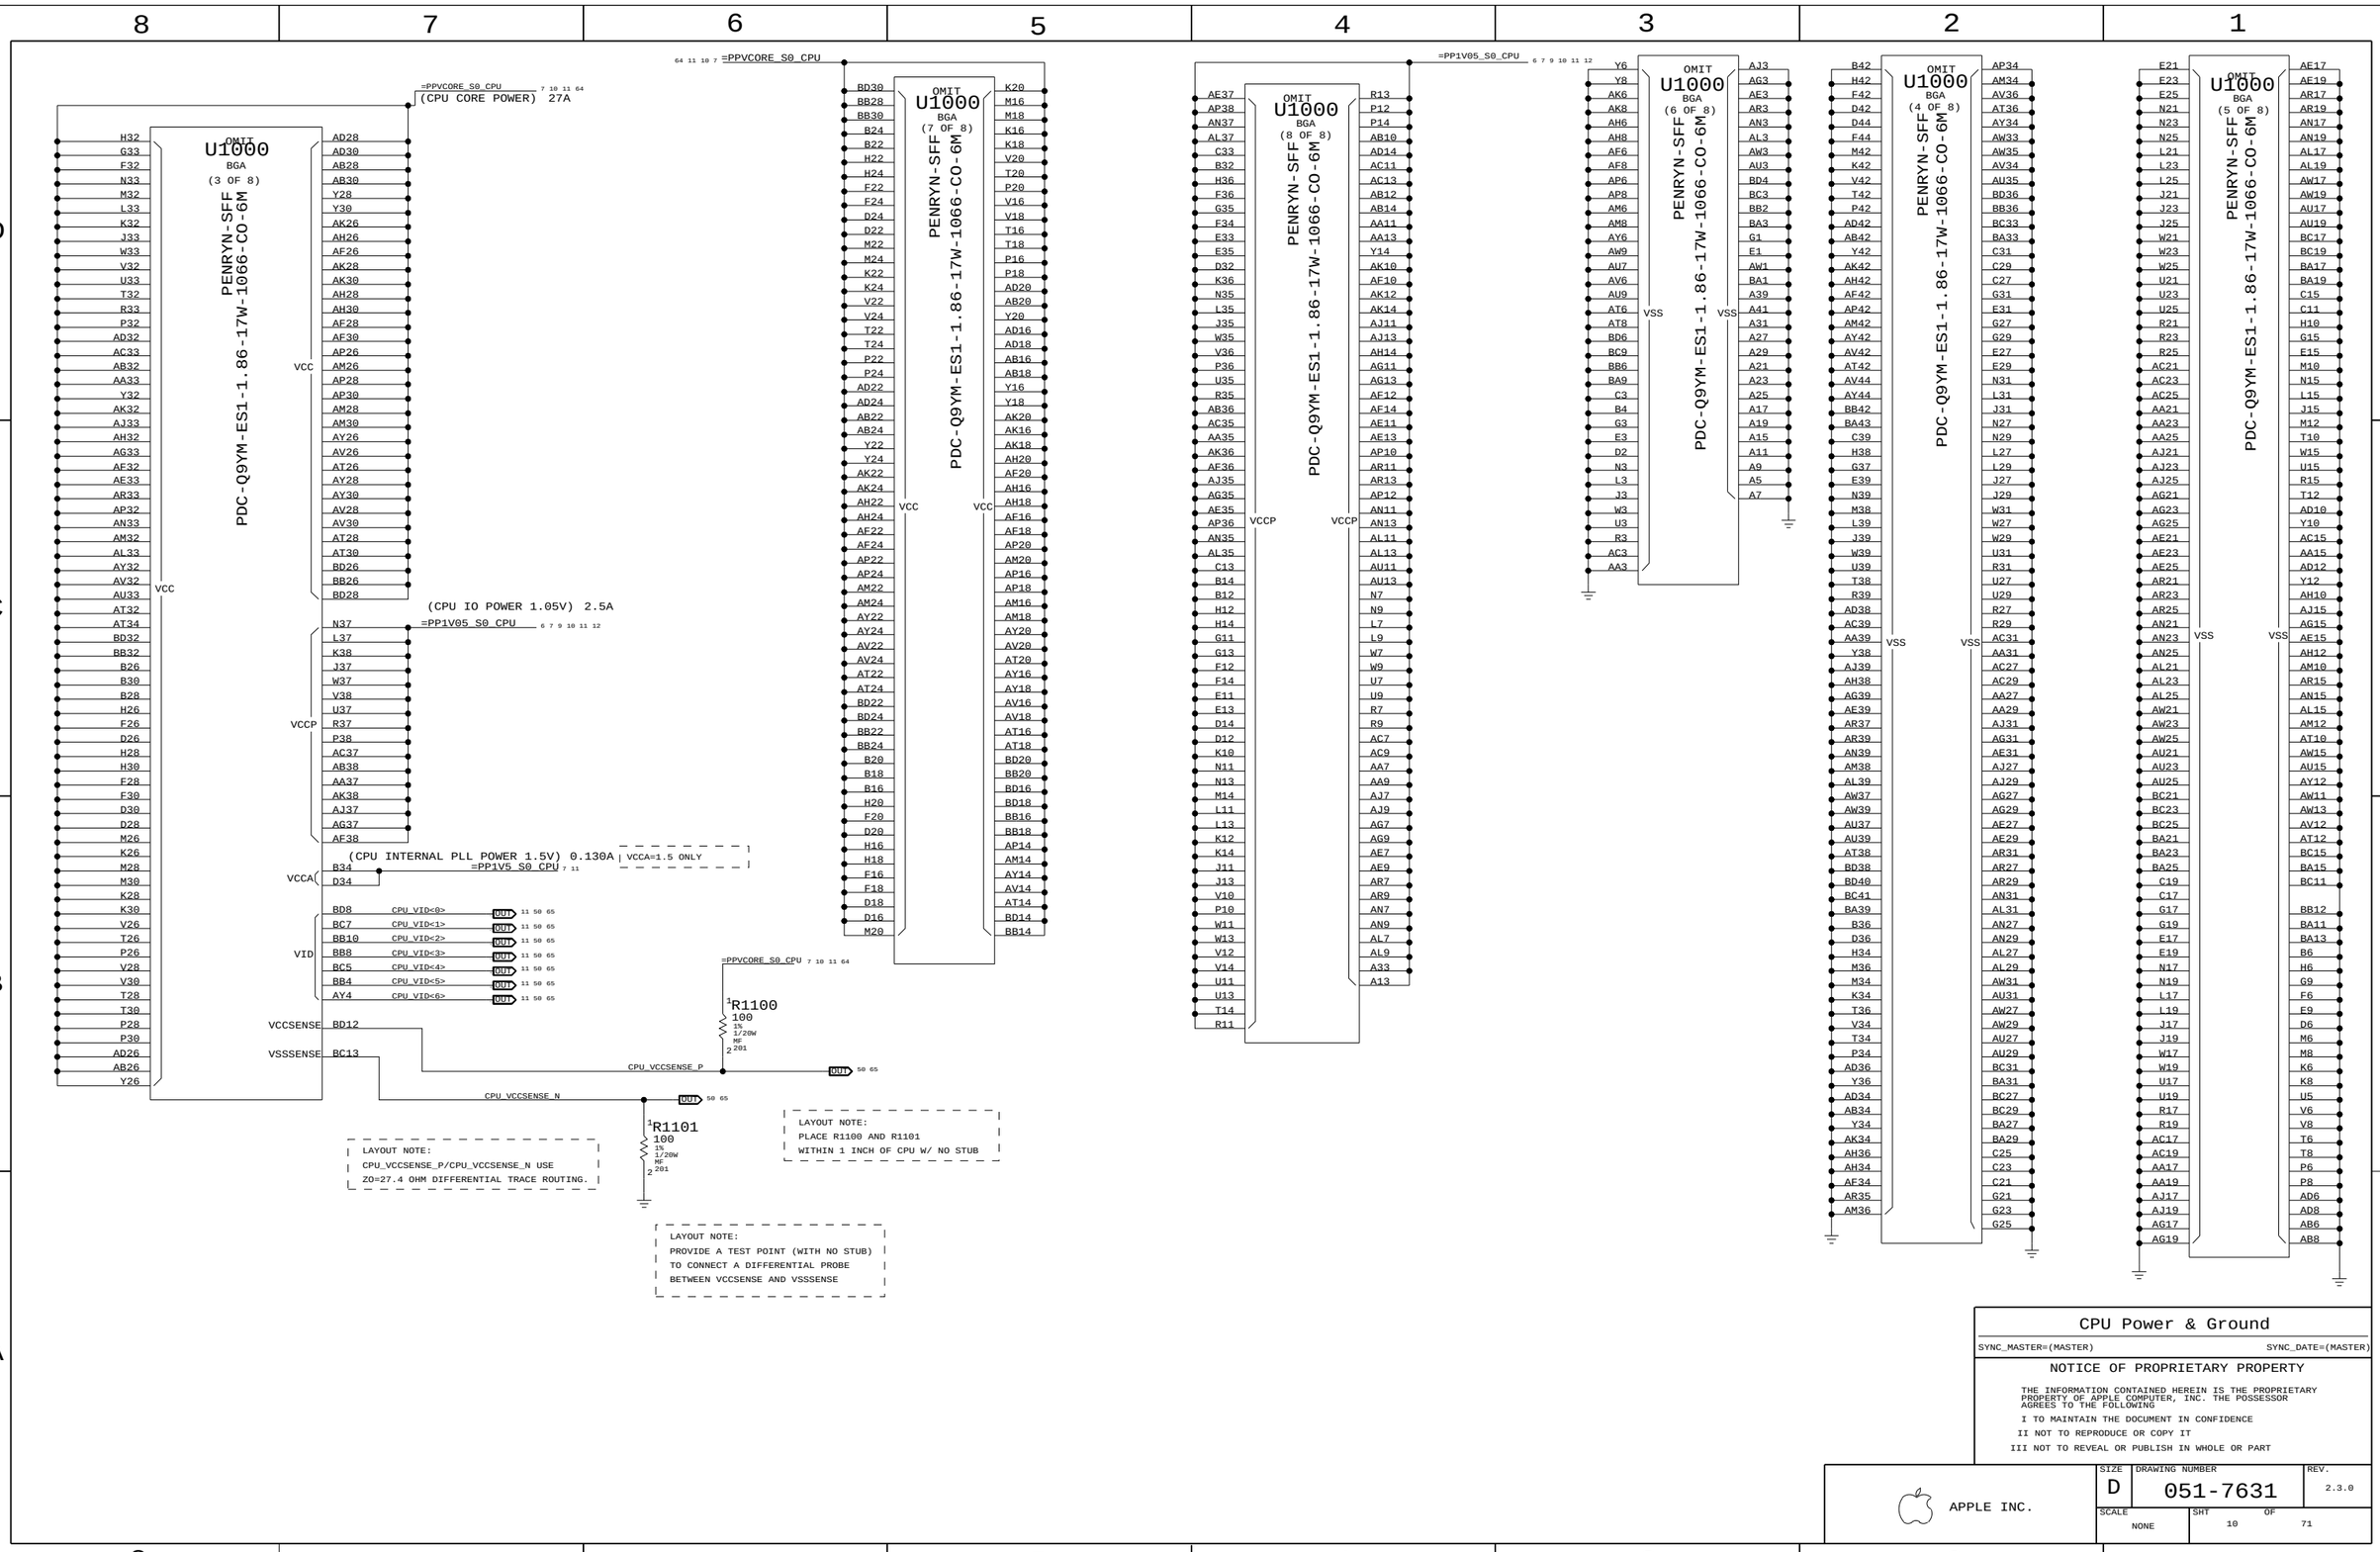

WWW.AliSaler.Com

CPU VCORE HF AND BULK DECOUPLING

3x 330uF. 32x 10uF 0603, 28x 2.2uF 0402 + 40x 2.2uF 0402

64 10 7 =PPVCORE_S0_CPU

10UF 0603 = APN:138S0568 = MURATA,TAIYO,TDK,SAMSUNG

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1200 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1201 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1202 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1203 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1204 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1205 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1206 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1207 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1208 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1209 10UF 20% 6.3V OMIT X5R 603

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1210 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1211 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1212 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1213 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1214 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1215 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1216 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1217 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1218 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1219 10UF 20% 6.3V OMIT X5R 603

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1220 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1221 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1222 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1223 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1224 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1225 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1226 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1227 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1228 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1229 10UF 20% 6.3V OMIT X5R 603

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1230 10UF 20% 6.3V OMIT X5R 603
CRITICAL C1231 10UF 20% 6.3V OMIT X5R 603

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1240 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1241 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1242 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1243 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1244 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1245 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1246 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1247 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1248 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1249 2.2UF 20% 6.3V CERM OMIT 402-LF

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1250 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1251 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1252 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1253 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1254 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1255 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1256 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1257 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1258 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1259 2.2UF 20% 6.3V CERM OMIT 402-LF

LAYOUT NOTE:
PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C1260 2.2UF 20% 6.3V CERM 402-LF
CRITICAL C1261 2.2UF 20% 6.3V CERM 402-LF
CRITICAL C1262 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1263 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1264 2.2UF 20% 6.3V CERM 402-LF
CRITICAL C1265 2.2UF 20% 6.3V CERM 402-LF
CRITICAL C1266 2.2UF 20% 6.3V CERM OMIT 402-LF
CRITICAL C1267 2.2UF 20% 6.3V CERM OMIT 402-LF

LAYOUT NOTE:
PLACE ON SAME SIDE AS CPU

CRITICAL C1270 330UF 20% 2.0V POLY-TANT D2T-SM1
CRITICAL C1271 330UF 20% 2.0V POLY-TANT D2T-SM1

CRITICAL C1272 330UF 20% 2.0V POLY-TANT D2T-SM1

LAYOUT NOTE:
PLACE ON SAME SIDE AS CPU

Intel recommends 3x220UF @ 9mOHM

CPU VCORE VID CONNECTIONS

65 50 10 CPU_VID<0..6> — IMVP6_VID<0..6> 65
MAKE_BASE=TRUE

VCCA (CPU AVdd) DECOUPLING

10 7 =PP1V5_S0_CPU

1x 10uF, 1x 0.01uF

C1280 10uF 20% 6.3V X5R 603
C1281 0.01UF 10% 10V X5R 201

LAYOUT NOTE:
PLACE C1281 NEAR PIN B34 OF U1000

VCCP (CPU I/O) DECOUPLING

12 10 9 7 6 =PP1V05_S0_CPU

1X 330UF, 12X 2.2UF

C1283 C1284 C1285 C1286 C1287 C1288 2.2UF 20% 6.3V CERM OMIT 402-LF

CRITICAL C1290 330UF 20% 2.5V POLY-TANT CASE-C2-SM

C1291 C1292 C1293 C1294 C1295 C1296 2.2UF 20% 6.3V CERM OMIT 402-LF

LAYOUT NOTE:
PLACE C1290 CLOSE TO CPU
PLACE C1283-C1288 CLOSE TO FSB ADDRESS PINS
PLACE C1291-C1296 CLOSE TO FSB DATA PINS

CPU Decoupling & VID

SYNC_MASTER=MSARWAR SYNC_DATE=04/26/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 11 OF 71	

WWW.AliSaler.Com

MCP79-specific pinout

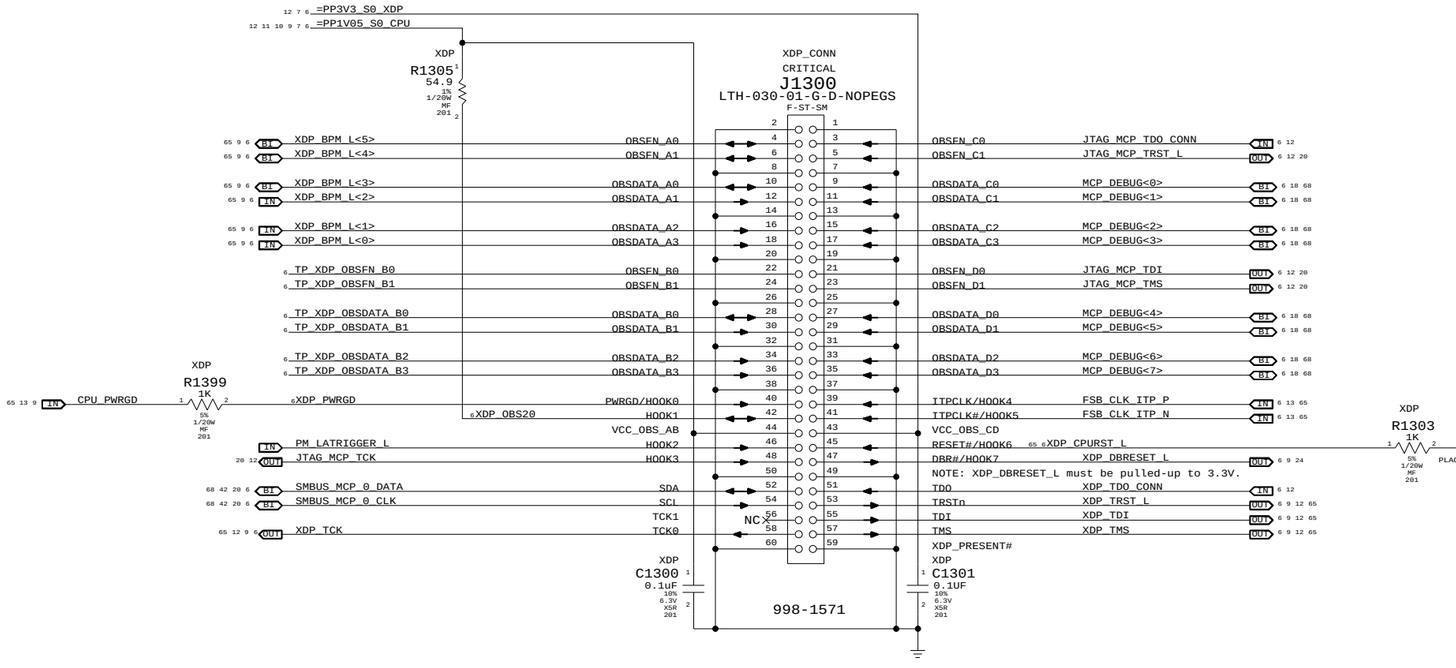

eXtended Debug Port (XDP)

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	12	71

WWW.AliSaler.Com

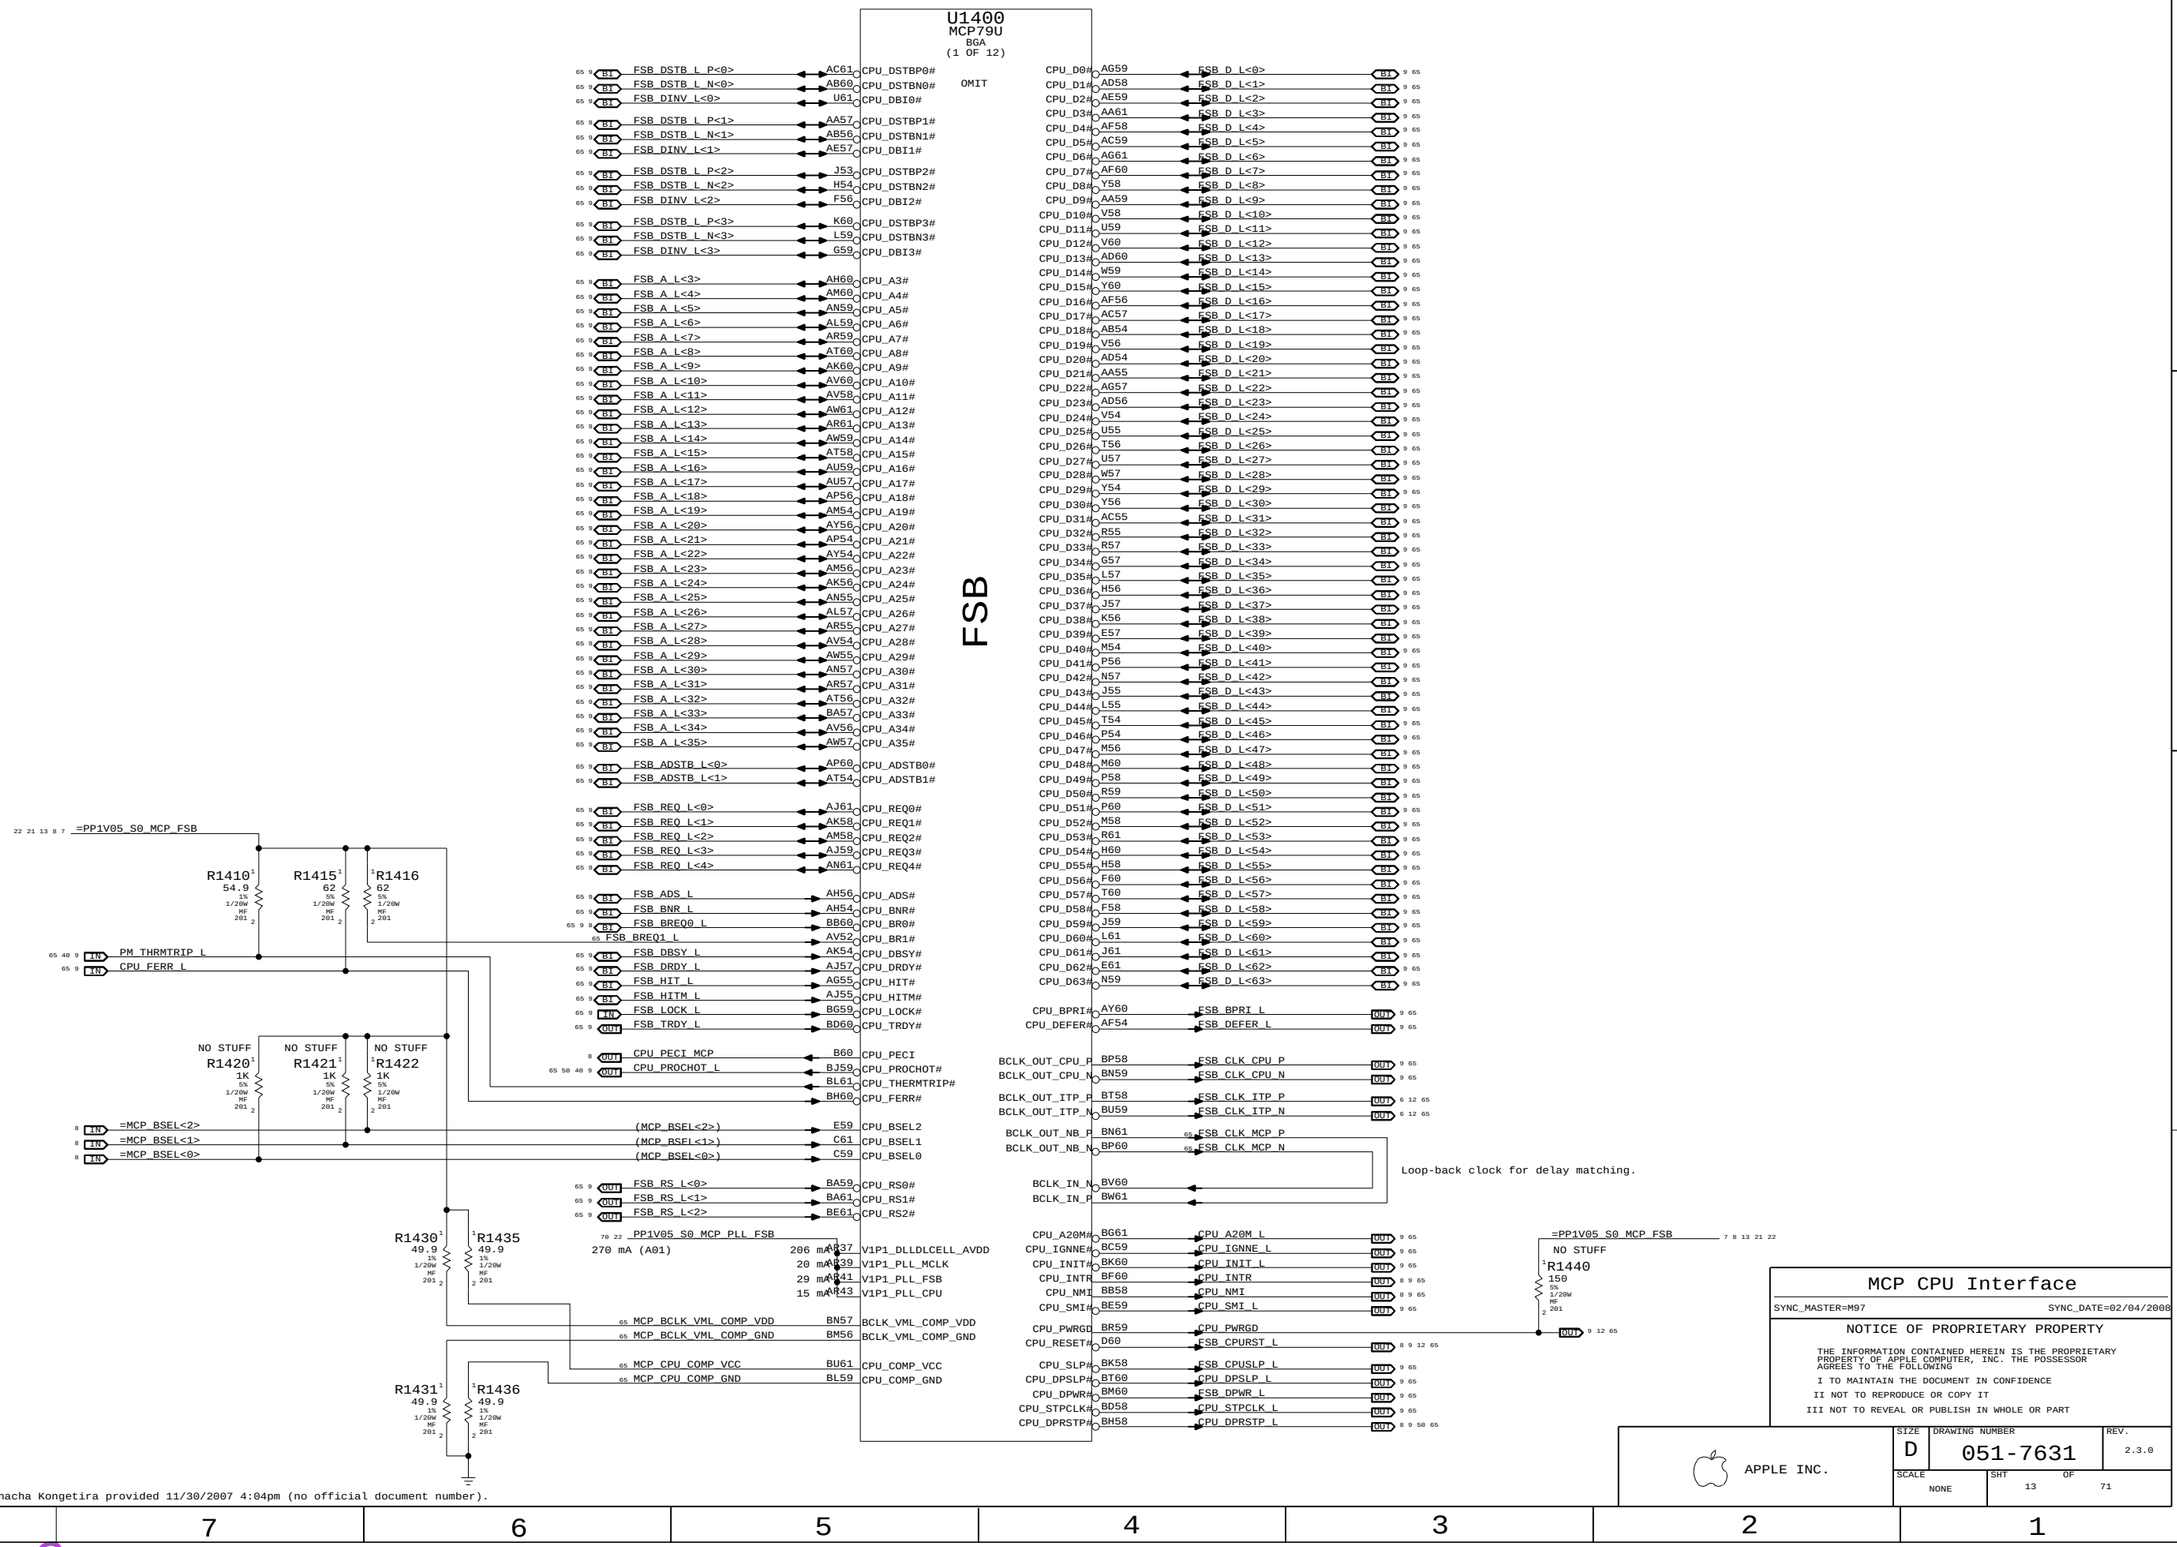

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

WWW.AliSaler.Com

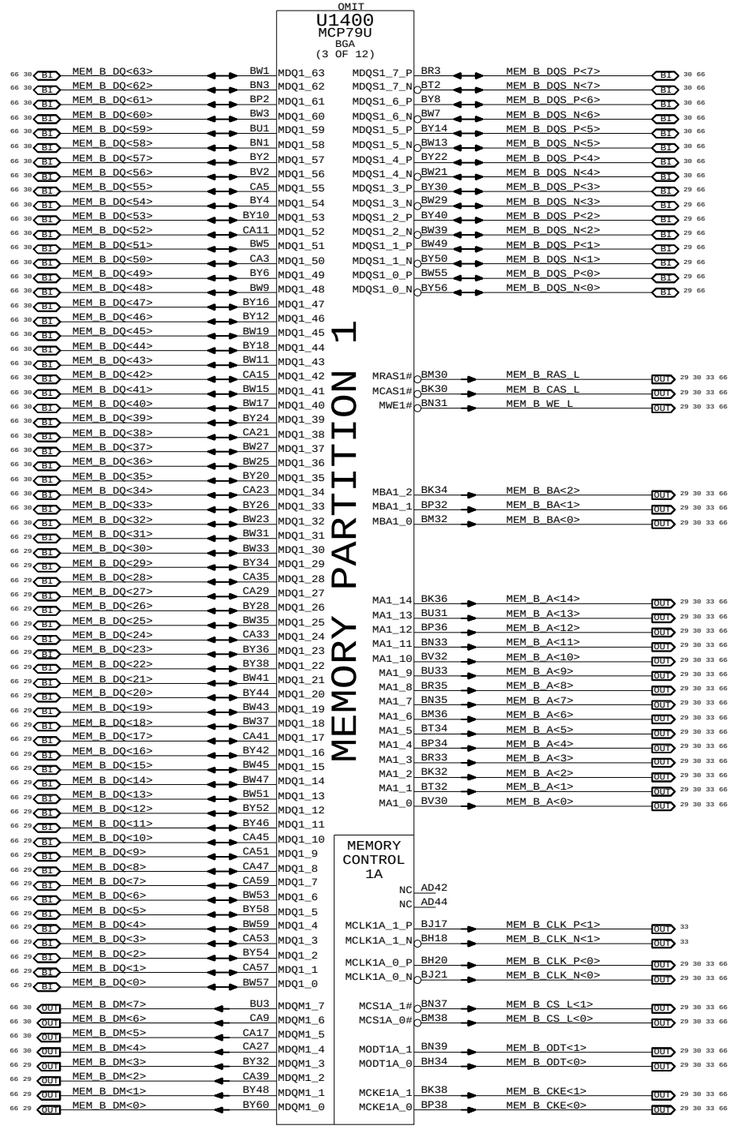

MCP Memory Interface

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 14 OF 71

WWW.AliSaler.Com

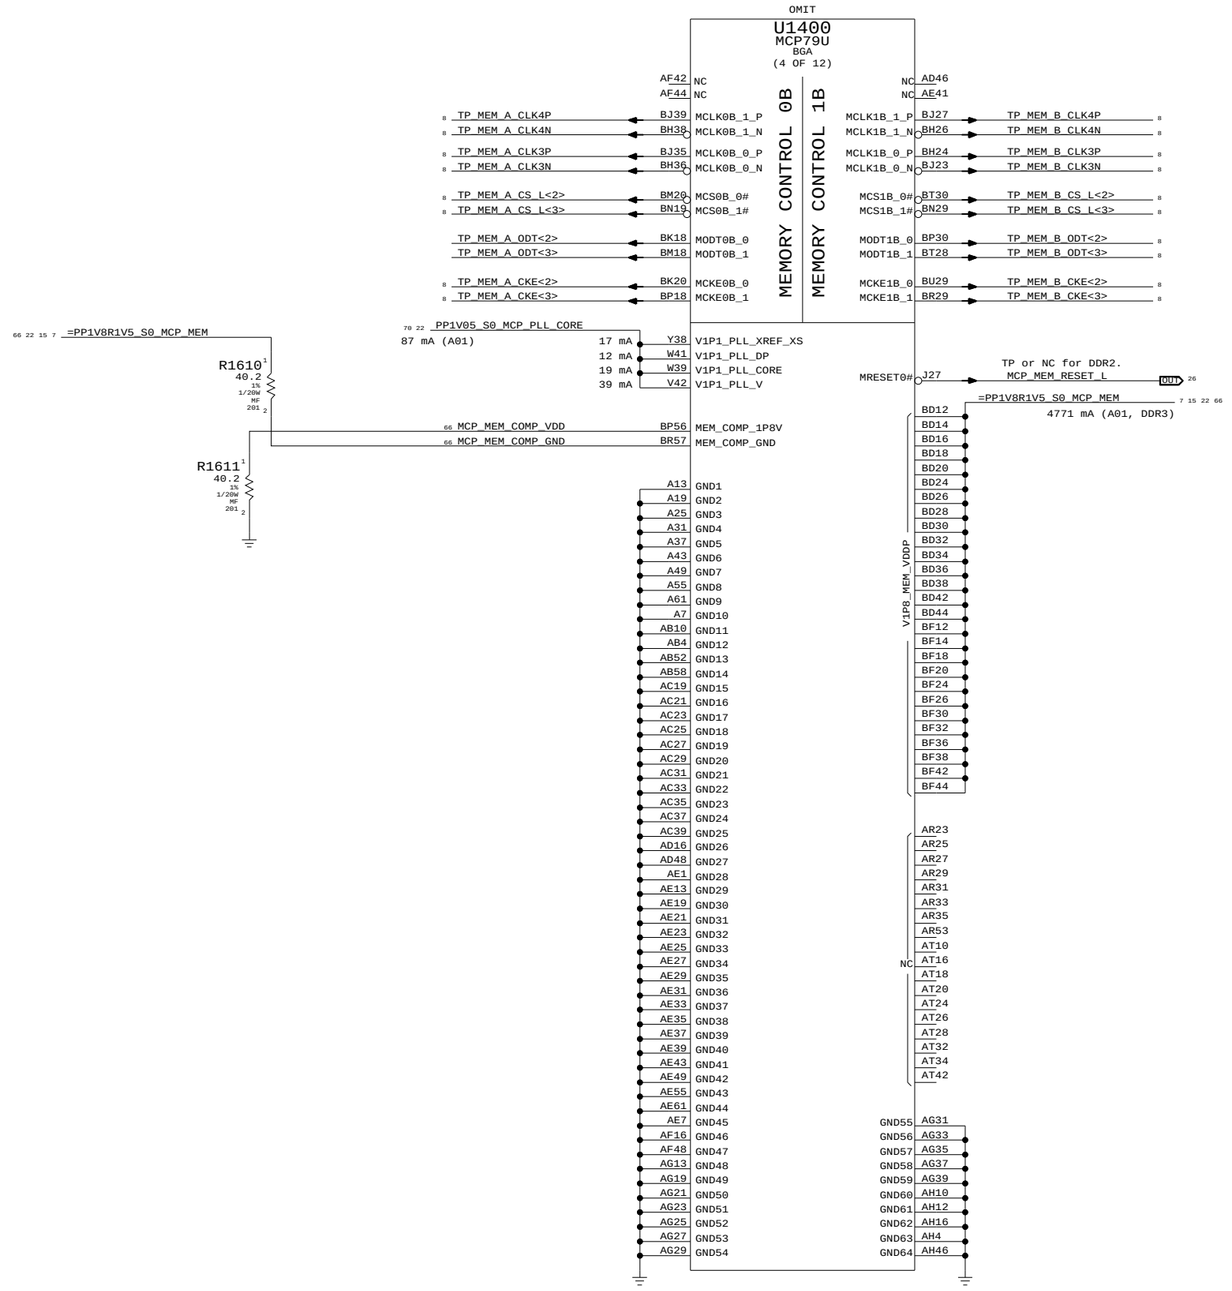

MCP Memory Misc

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	15	71

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

WWW.AliSaler.Com

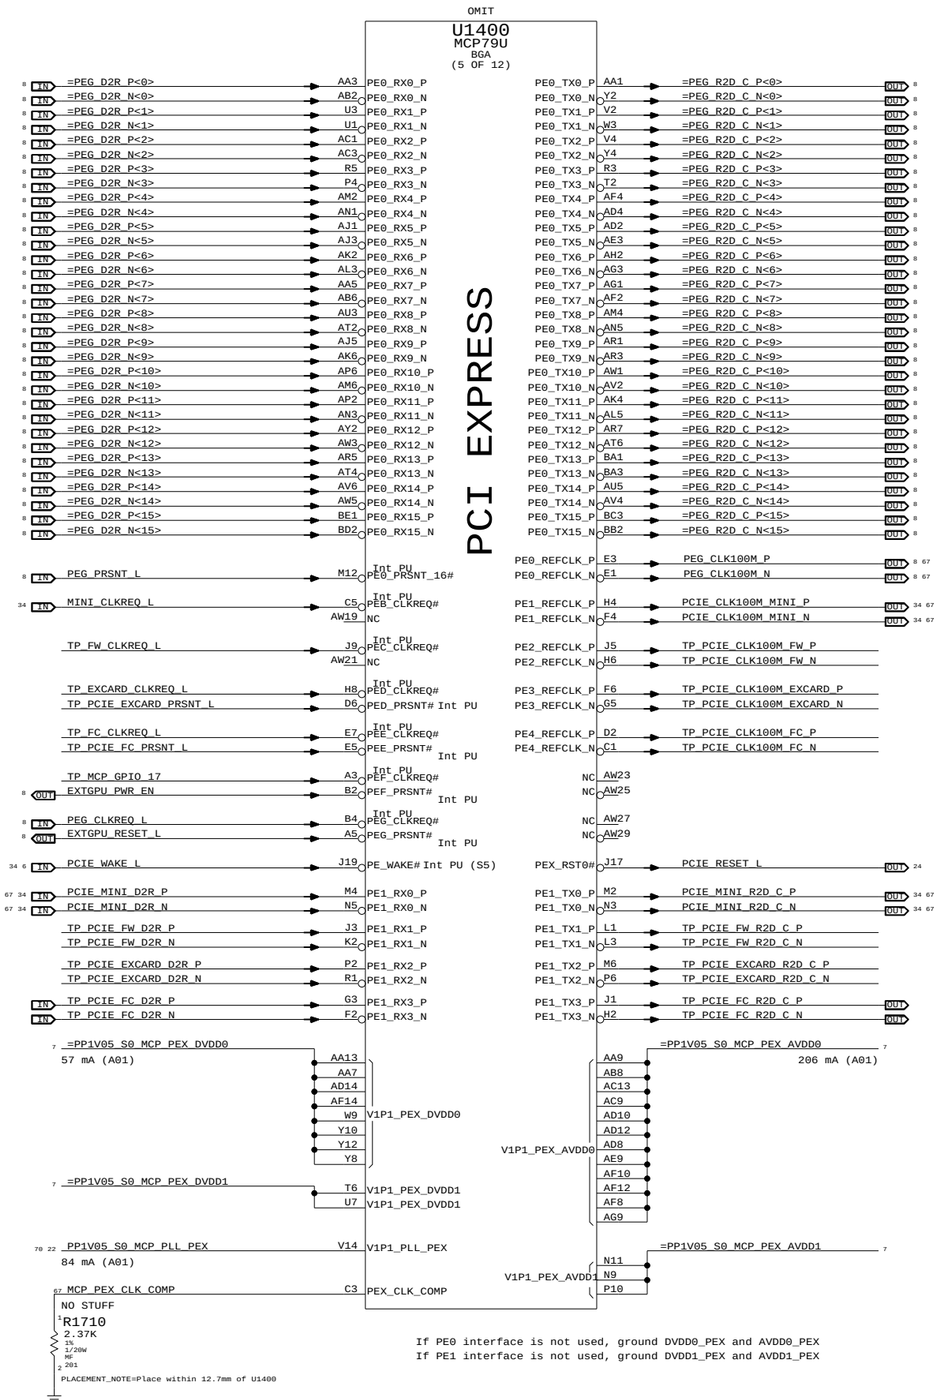

MCP PCIe Interfaces

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 16 OF 71

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

WWW.AliSaler.Com

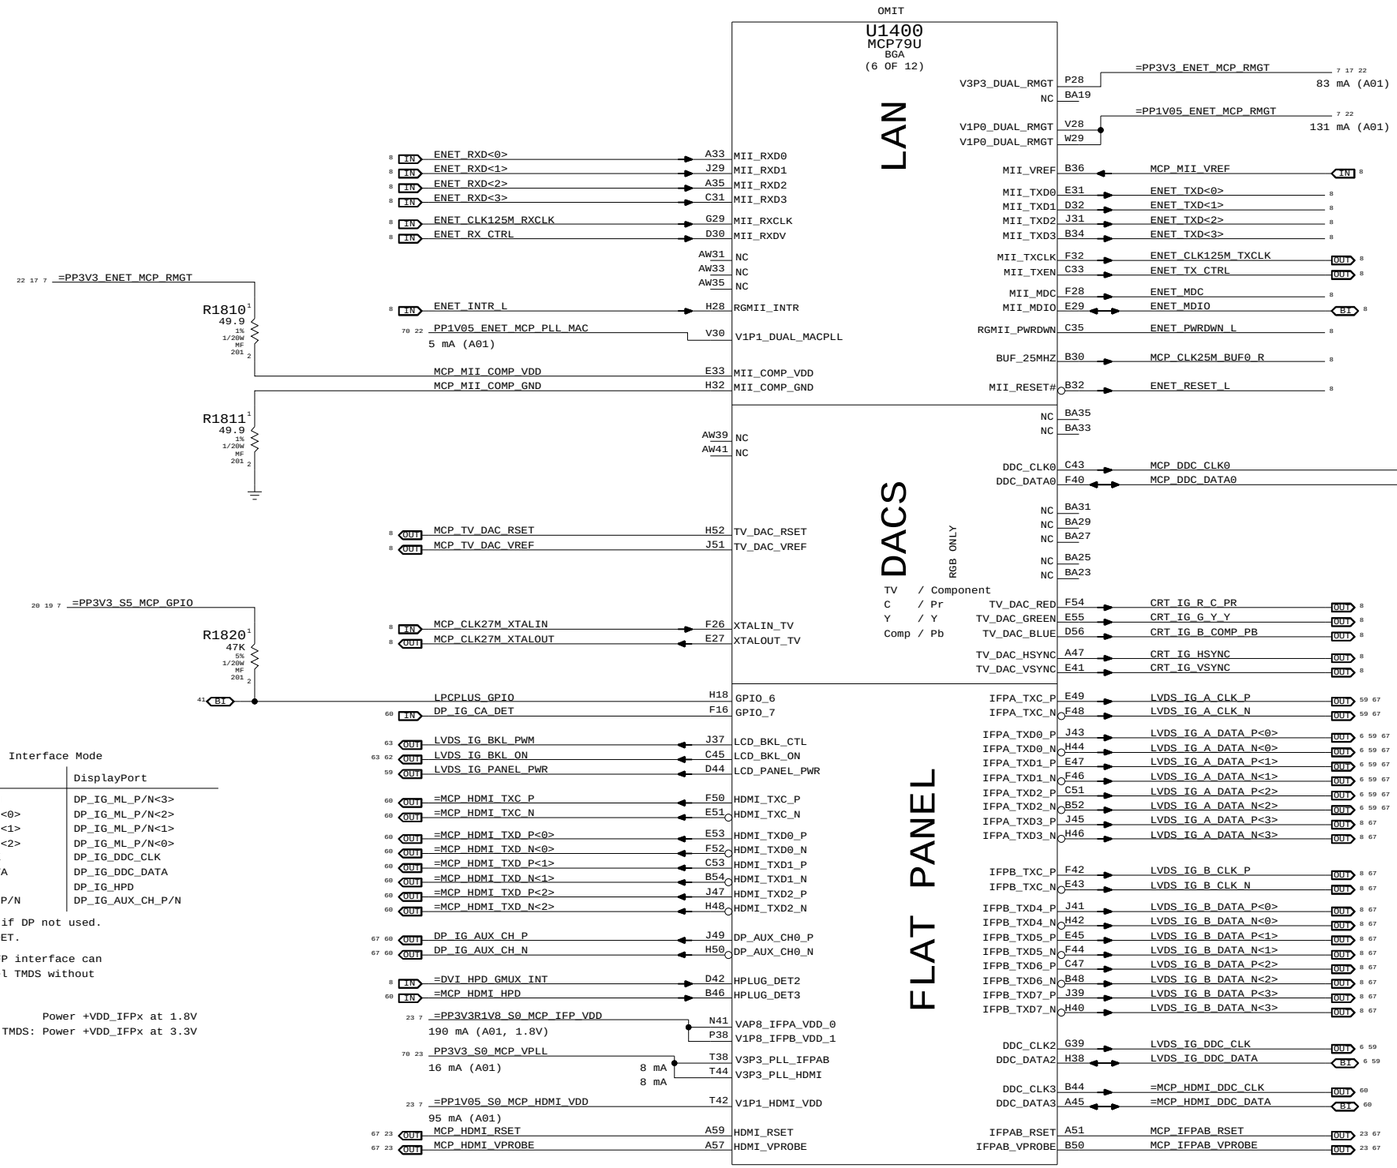

Interface Mode

MCP Signal	TMDS/HDMI	DisplayPort
=MCP_HDMI_TXC_P/N	TMDS_IG_TXC_P/N	DP_IG_ML_P/N<3>
=MCP_HDMI_TXD_P/N<0>	TMDS_IG_TXD_P/N<0>	DP_IG_ML_P/N<2>
=MCP_HDMI_TXD_P/N<1>	TMDS_IG_TXD_P/N<1>	DP_IG_ML_P/N<1>
=MCP_HDMI_TXD_P/N<2>	TMDS_IG_TXD_P/N<2>	DP_IG_ML_P/N<0>
=MCP_HDMI_DDC_CLK	TMDS_IG_DDC_CLK	DP_IG_DDC_CLK
=MCP_HDMI_DDC_DATA	TMDS_IG_DDC_DATA	DP_IG_DDC_DATA
=MCP_HDMI_HPD	TMDS_IG_HPD	DP_IG_HPD
DP_IG_AUX_CH_P/N	TP_DP_IG_AUX_CHP/N	DP_IG_AUX_CH_P/N

NOTE: 1M pull-down required on DP_IG_CA_DET if DP not used.
NOTE: 20K pull-down required on DP_HOTPLUG_DET.

NOTE: HDMI port requires level-shifting. IFP interface can be used to provide HDMI or dual-channel TMDS without level-shifters.

LVDS: Power +VDD_IFPx at 1.8V
Dual-channel TMDS: Power +VDD_IFPx at 3.3V

Network Interface Select

Interface	ENET_TXD<0>
RGMII	1
MII	0

NOTE: All Apple products set strap to MII, RGMII products will enable feature via software. This avoids a leakage issue since MCP79 requires a S5 pull-up.

RGB DAC Disable:

Okay to float all RGB_DAC signals.
DDC_CLK0/DDC_DATA0 pull-ups still required.

TV DAC Disable:

Okay to float all TV_DAC signals.
Okay to float XTALIN_TV and XTALOUT_TV.
DDC_CLK0/DDC_DATA0 pull-ups still required.

WF: IFP is capable of LVDS (1.8V) or TMDS (3.3V), need aliases

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

MCP Ethernet & Graphics

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 17 OF 71	

WWW.AliSaler.Com

OMIT

U1400
MCP79U
BGA
(7 OF 12)

PCI

68 18	PCI_REQ0_L	AJ9	PCI_REQ0#		
68 18	PCI_REQ1_L	AD6	PCI_REQ1#		
18 OUT	CRTMUX_SEL_TV_L	AH6	PCI_REQ2#		
8 OUT	AUD_IPHS_SWITCH_EN	AP8	PCI_REQ3#		
18 IN	MCP_RS232_SIN_L	AC5	PCI_REQ4#		
68 12 6 BI	MCP_DEBUG<0>	BC5	PCI_AD0	NC	BE57
68 12 6 BI	MCP_DEBUG<1>	BK4	PCI_AD1	NC	BE9
68 12 6 BI	MCP_DEBUG<2>	BE5	PCI_AD2	PCI_GNT2#	AE5 → TP_LVDSMUX_SEL_IG_L OUT
68 12 6 BI	MCP_DEBUG<3>	BH4	PCI_AD3	PCI_GNT3#	AC7 → TP_DPMUX_SEL_IG_L OUT
68 12 6 BI	MCP_DEBUG<4>	BE3	PCI_AD4	PCI_GNT4#	AF6 → MCP_RS232_SOUT_L OUT 18
68 12 6 BI	MCP_DEBUG<5>	BA5	PCI_AD5		BE53
68 12 6 BI	MCP_DEBUG<6>	BJ3	PCI_AD6		BD8
68 12 6 BI	MCP_DEBUG<7>	BJ5	PCI_AD7		BD56
		BC53			BD52
		BB8			BD48
		BB6			BC57
		BB56		NC	BC9
		BB54			BD50
		BB52			BD54
		BB50			BD6
		BB48			BE49
		BB46			BE55
		BB44			BA53
		BB42			
		BB38			
		BB36			
		BB34			
		BB32	NC		
		BB30			
		BB28			
		BB26			
		BB24			
		BB20			
		BB10			
		BA9			
		BA7			
		BA55			
		BA49			
		BA43			
		BA41			
		BA39			

FIXME: USED TO BE PM_LATRIGGER_L

Int PU (S5)

				PCI_RESET0#	G17 → MEM_VTT_EN_R OUT 24
				PCI_RESET1#	G21 → TP_PCI_RESET1_L
				PCI_CLK0	AM10 → TP_PCI_CLK0
				NC	BE7
				PCI_CLK2	AG5 → 68 PCI_CLK33M_MCP_R
				PCI_CLKIN	AG7 → 68 PCI_CLK33M_MCP

R1910
22
5% 1/20W MF 201
PLACEMENT_NOTE=Place close to pin R8

LPC

41 39 IN	PM_CLKRUN_L	AH8	PCI_CLKRUN#	LPC_FRAME#	AJ7 → LPC_FRAME_R_L R1960 22 LPC_FRAME_L OUT 39 41 68
8	FW_PME_L	AN9	LPC_DRQ1# Int PU	LPC_PWRDWN#	AL9 → LPC_PWRDWN_L OUT 39 41
	TP_LPC_DRQ0_L	AN7	LPC_DRQ0# Int PU	LPC_RESET0#	E17 → LPC_RESET_L OUT 24 68
41 39 BI	LPC_SERIRQ	AT8	LPC_SERIRQ Int PU	LPC_AD0	AM8 → LPC_AD_R<0> R1961 22 LPC_AD<0> BI 39 41 68
				LPC_AD1	AK8 → LPC_AD_R<1> R1962 22 LPC_AD<1> BI 39 41 68
				LPC_AD2	AK10 → LPC_AD_R<2> R1963 22 LPC_AD<2> BI 39 41 68
				LPC_AD3	AR9 → LPC_AD_R<3> R1964 22 LPC_AD<3> BI 39 41 68
				LPC_CLK0	BB4 → LPC_CLK33M_SMC_R OUT 24 68

R1965
10K
5% 1/20W MF 201

Strap for Boot ROM Selection (See HDA_SDOUT)

GND

AH48	GND65	GND98	AL7
AH52	GND66	GND99	AM16
AH58	GND67	GND100	AM48
AJ19	GND68	GND101	AN13
AJ21	GND69	GND102	AN19
AJ23	GND70	GND103	AN21
AJ25	GND71	GND104	AN23
AJ27	GND72	GND105	AN25
AJ29	GND73	GND106	AN27
AJ31	GND74	GND107	AN29
AJ33	GND75	GND108	AN31
AJ35	GND76	GND109	AN33
AJ37	GND77	GND110	AN35
AJ39	GND78	GND111	AN37
AK16	GND79	GND112	AN39
AK48	GND80	GND113	AN53
AL1	GND81	GND114	AP10
AL13	GND82	GND115	AP12
AL19	GND83	GND116	AP16
AL21	GND84	GND117	AP4
AL23	GND85	GND118	AP42
AL25	GND86	GND119	AP44
AL27	GND87	GND120	AP46
AL29	GND88	GND121	AP48
AL31	GND89	GND122	AP52
AL33	GND90	GND123	AP58
AL35	GND91	GND124	AT14
AL37	GND92	GND125	AT30
AL39	GND93	GND126	AT36
AL43	GND94	GND127	AT38
AL49	GND95	GND128	AT48
AL55	GND96	GND129	AU1
AL61	GND97	GND130	AU13

20 17 7 =PP3V3_S0_MCP_GPIO

18 MCP_RS232_SOUT_L	RP1900	8.2K	3	6	5% 1/32W 4X0201-HF
68 18 PCI_REQ0_L	RP1900	8.2K	4	5	5% 1/32W 4X0201-HF
68 18 PCI_REQ1_L	RP1901	8.2K	1	8	5% 1/32W 4X0201-HF
18 CRTMUX_SEL_TV_L	RP1901	8.2K	2	7	5% 1/32W 4X0201-HF
18 MCP_RS232_SIN_L	RP1901	8.2K	4	5	5% 1/32W 4X0201-HF

FIXME: ADJUST PINOUT PER LAYOUT

MCP PCI & LPC

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	18	71

WWW.AliSaler.Com

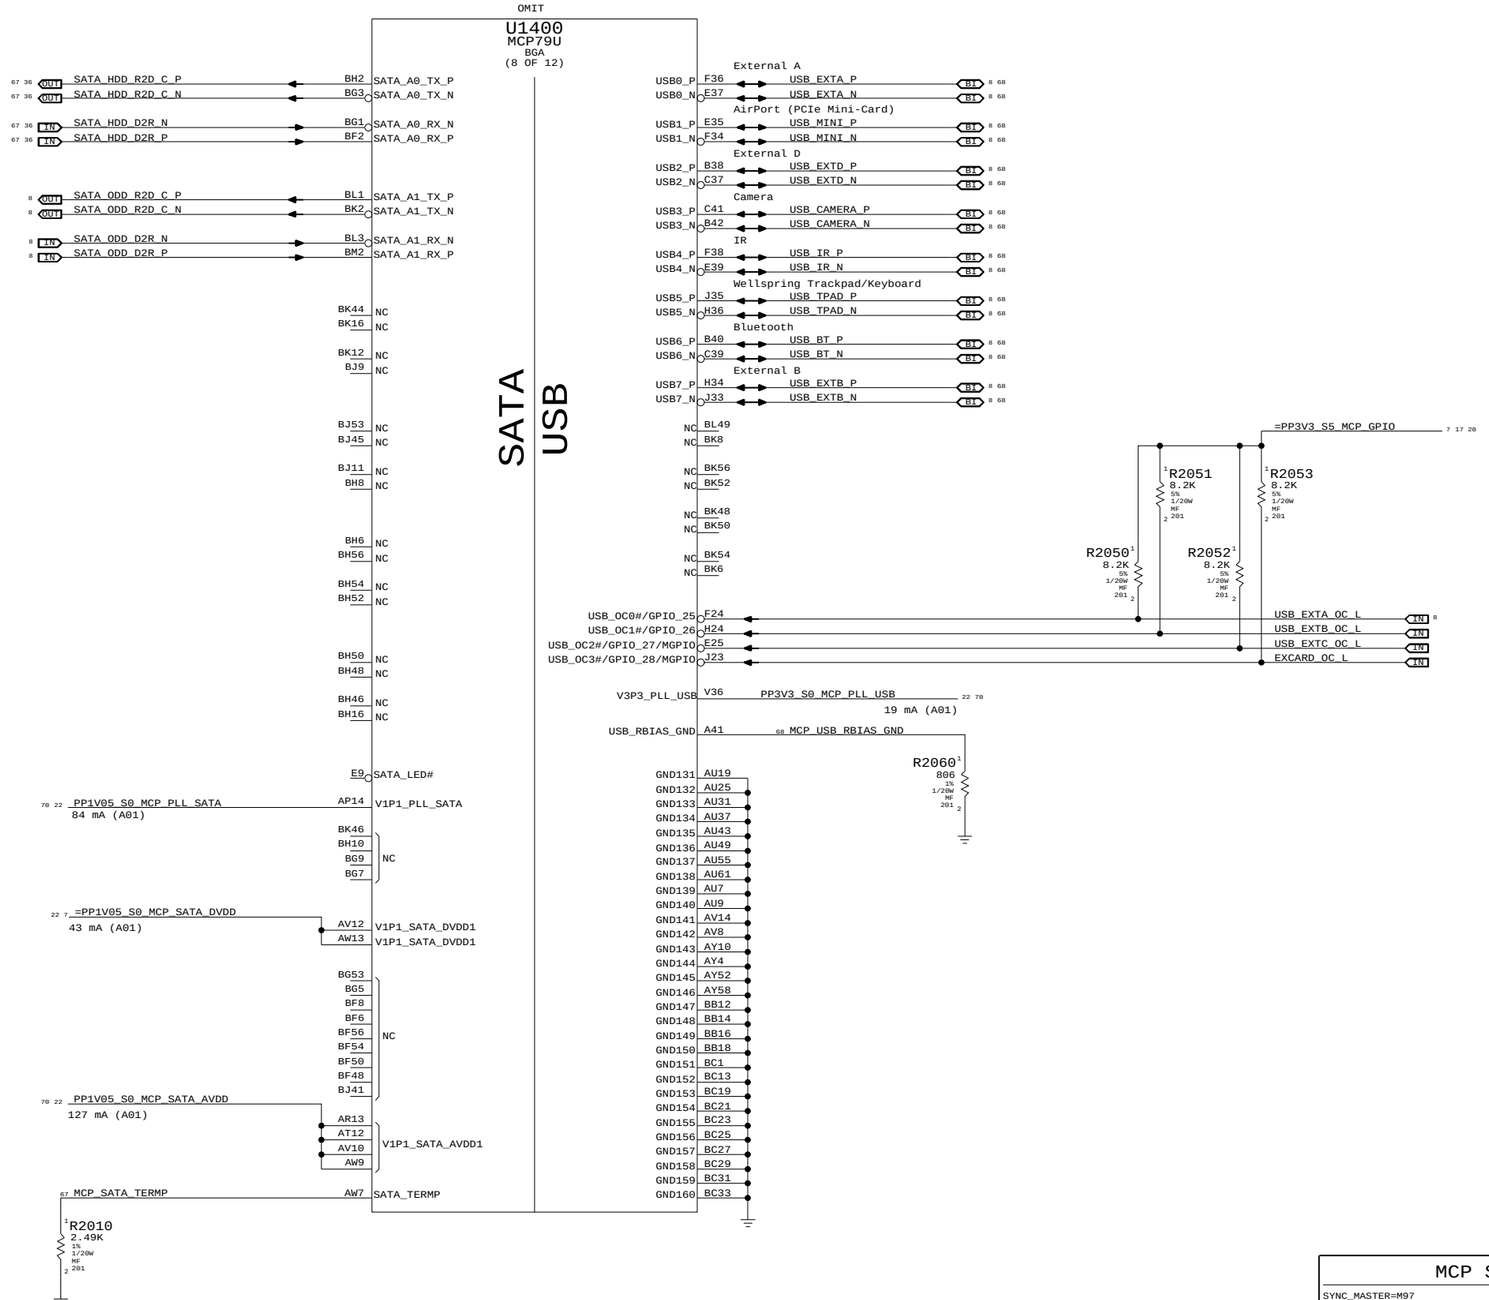

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

MCP SATA & USB

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	19	71

WWW.AliSaler.Com

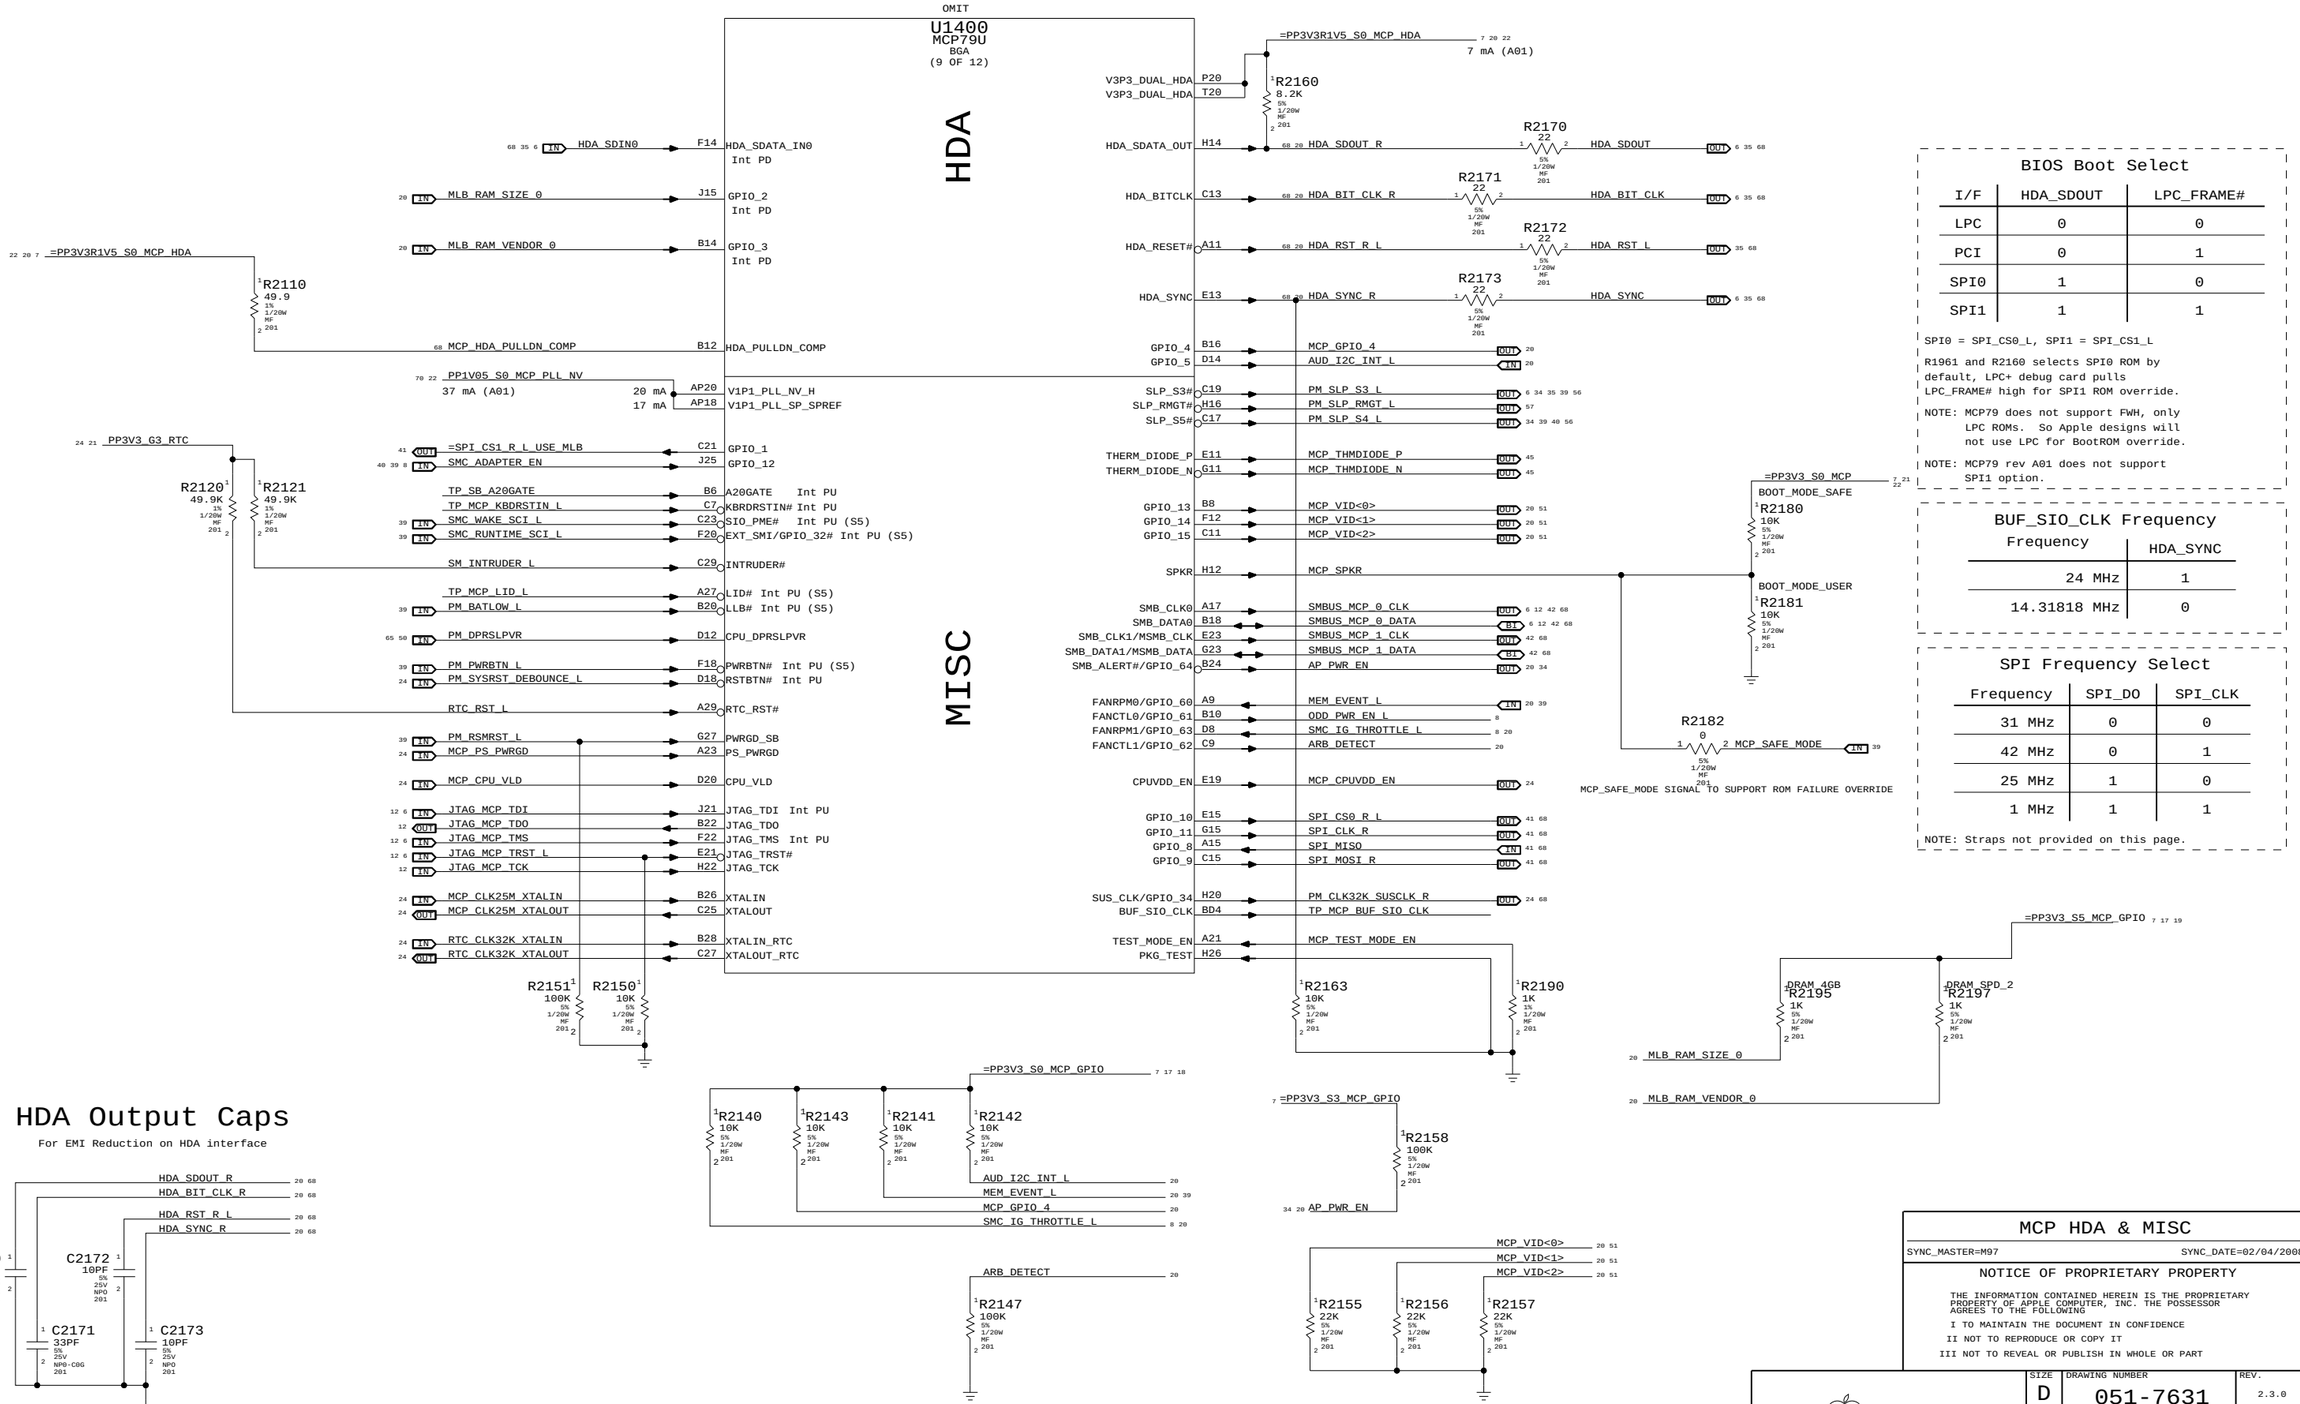

BIOS Boot Select

I/F	HDA_SDOUT	LPC_FRAME#
LPC	0	0
PCI	0	1
SPI0	1	0
SPI1	1	1

SPI0 = SPI_CS0_L, SPI1 = SPI_CS1_L

R1961 and R2160 selects SPI0 ROM by default, LPC+ debug card pulls LPC_FRAME# high for SPI1 ROM override.

NOTE: MCP79 does not support FWH, only LPC ROMs. So Apple designs will not use LPC for BootROM override.

NOTE: MCP79 rev A01 does not support SPI1 option.

BUF_SIO_CLK Frequency

Frequency	HDA_SYNC
24 MHz	1
14.31818 MHz	0

SPI Frequency Select

Frequency	SPI_DO	SPI_CLK
31 MHz	0	0
42 MHz	0	1
25 MHz	1	0
1 MHz	1	1

NOTE: Straps not provided on this page.

MCP HDA & MISC

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 20 OF 71

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

WWW.AliSaler.Com

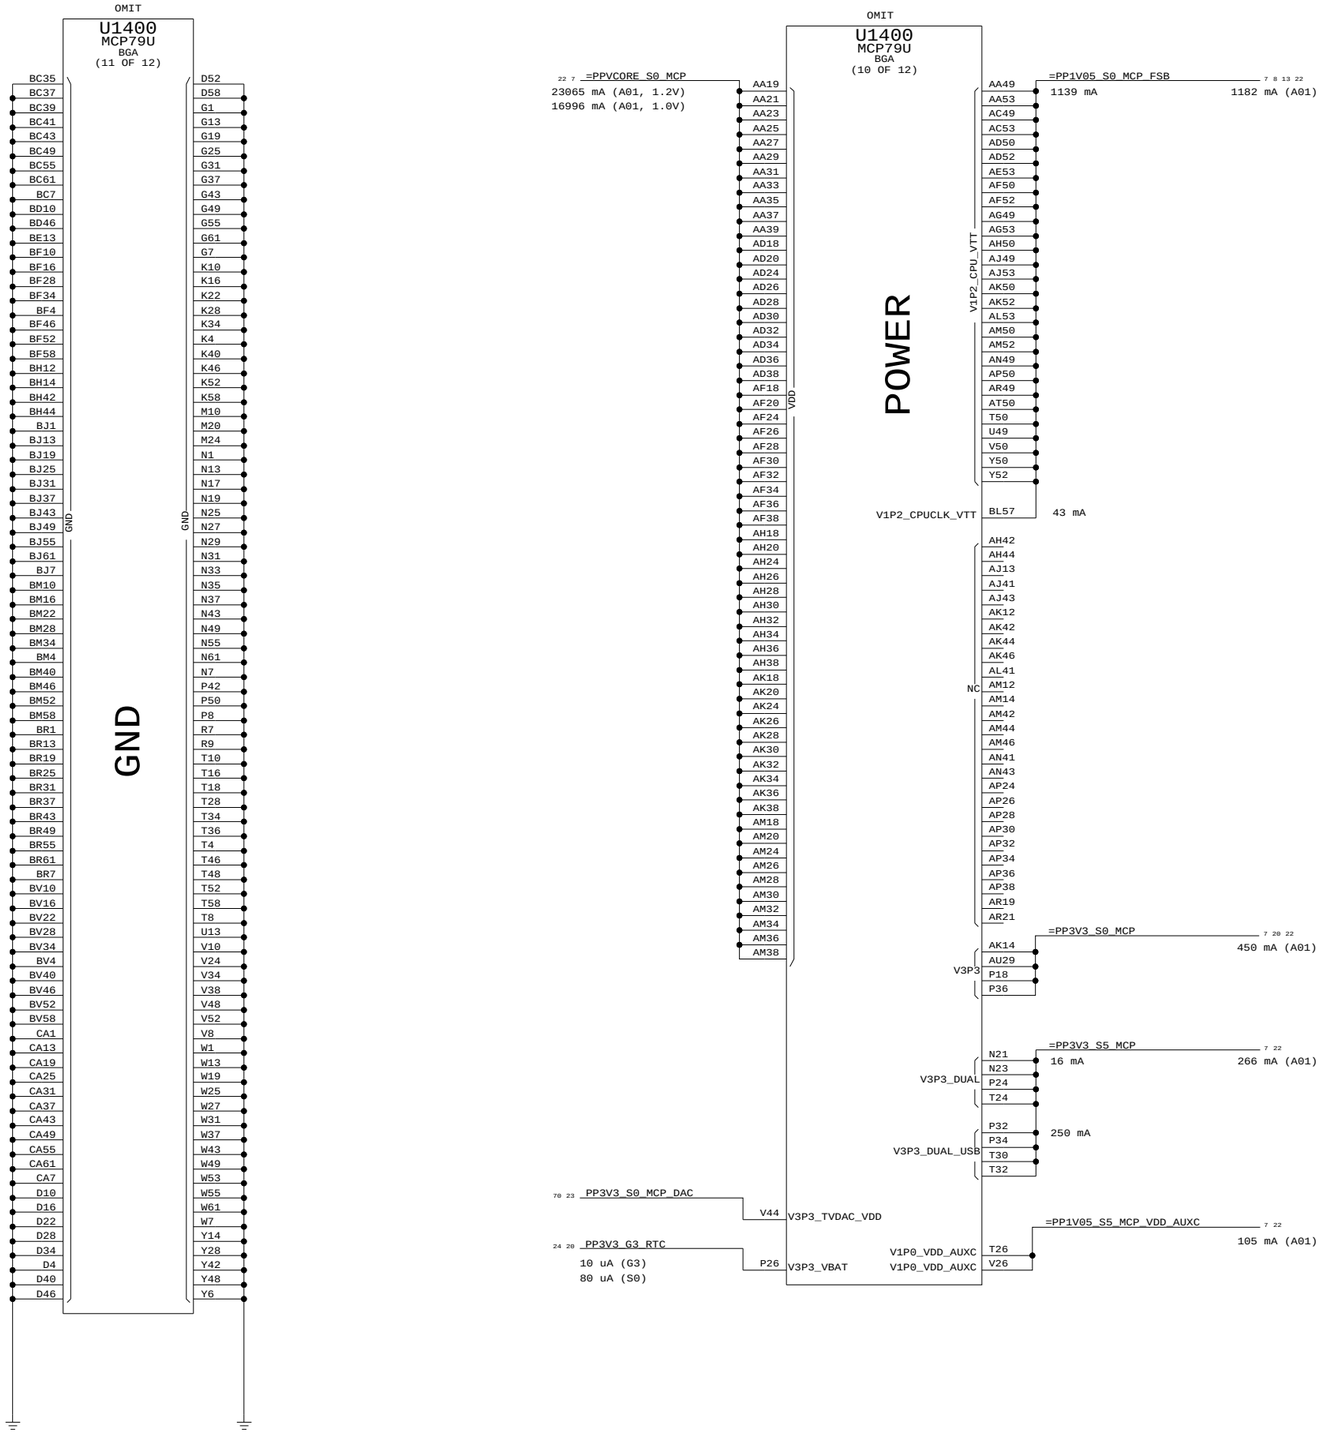

MCP Power & Ground

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	21	71

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

WWW.AliSaler.Com

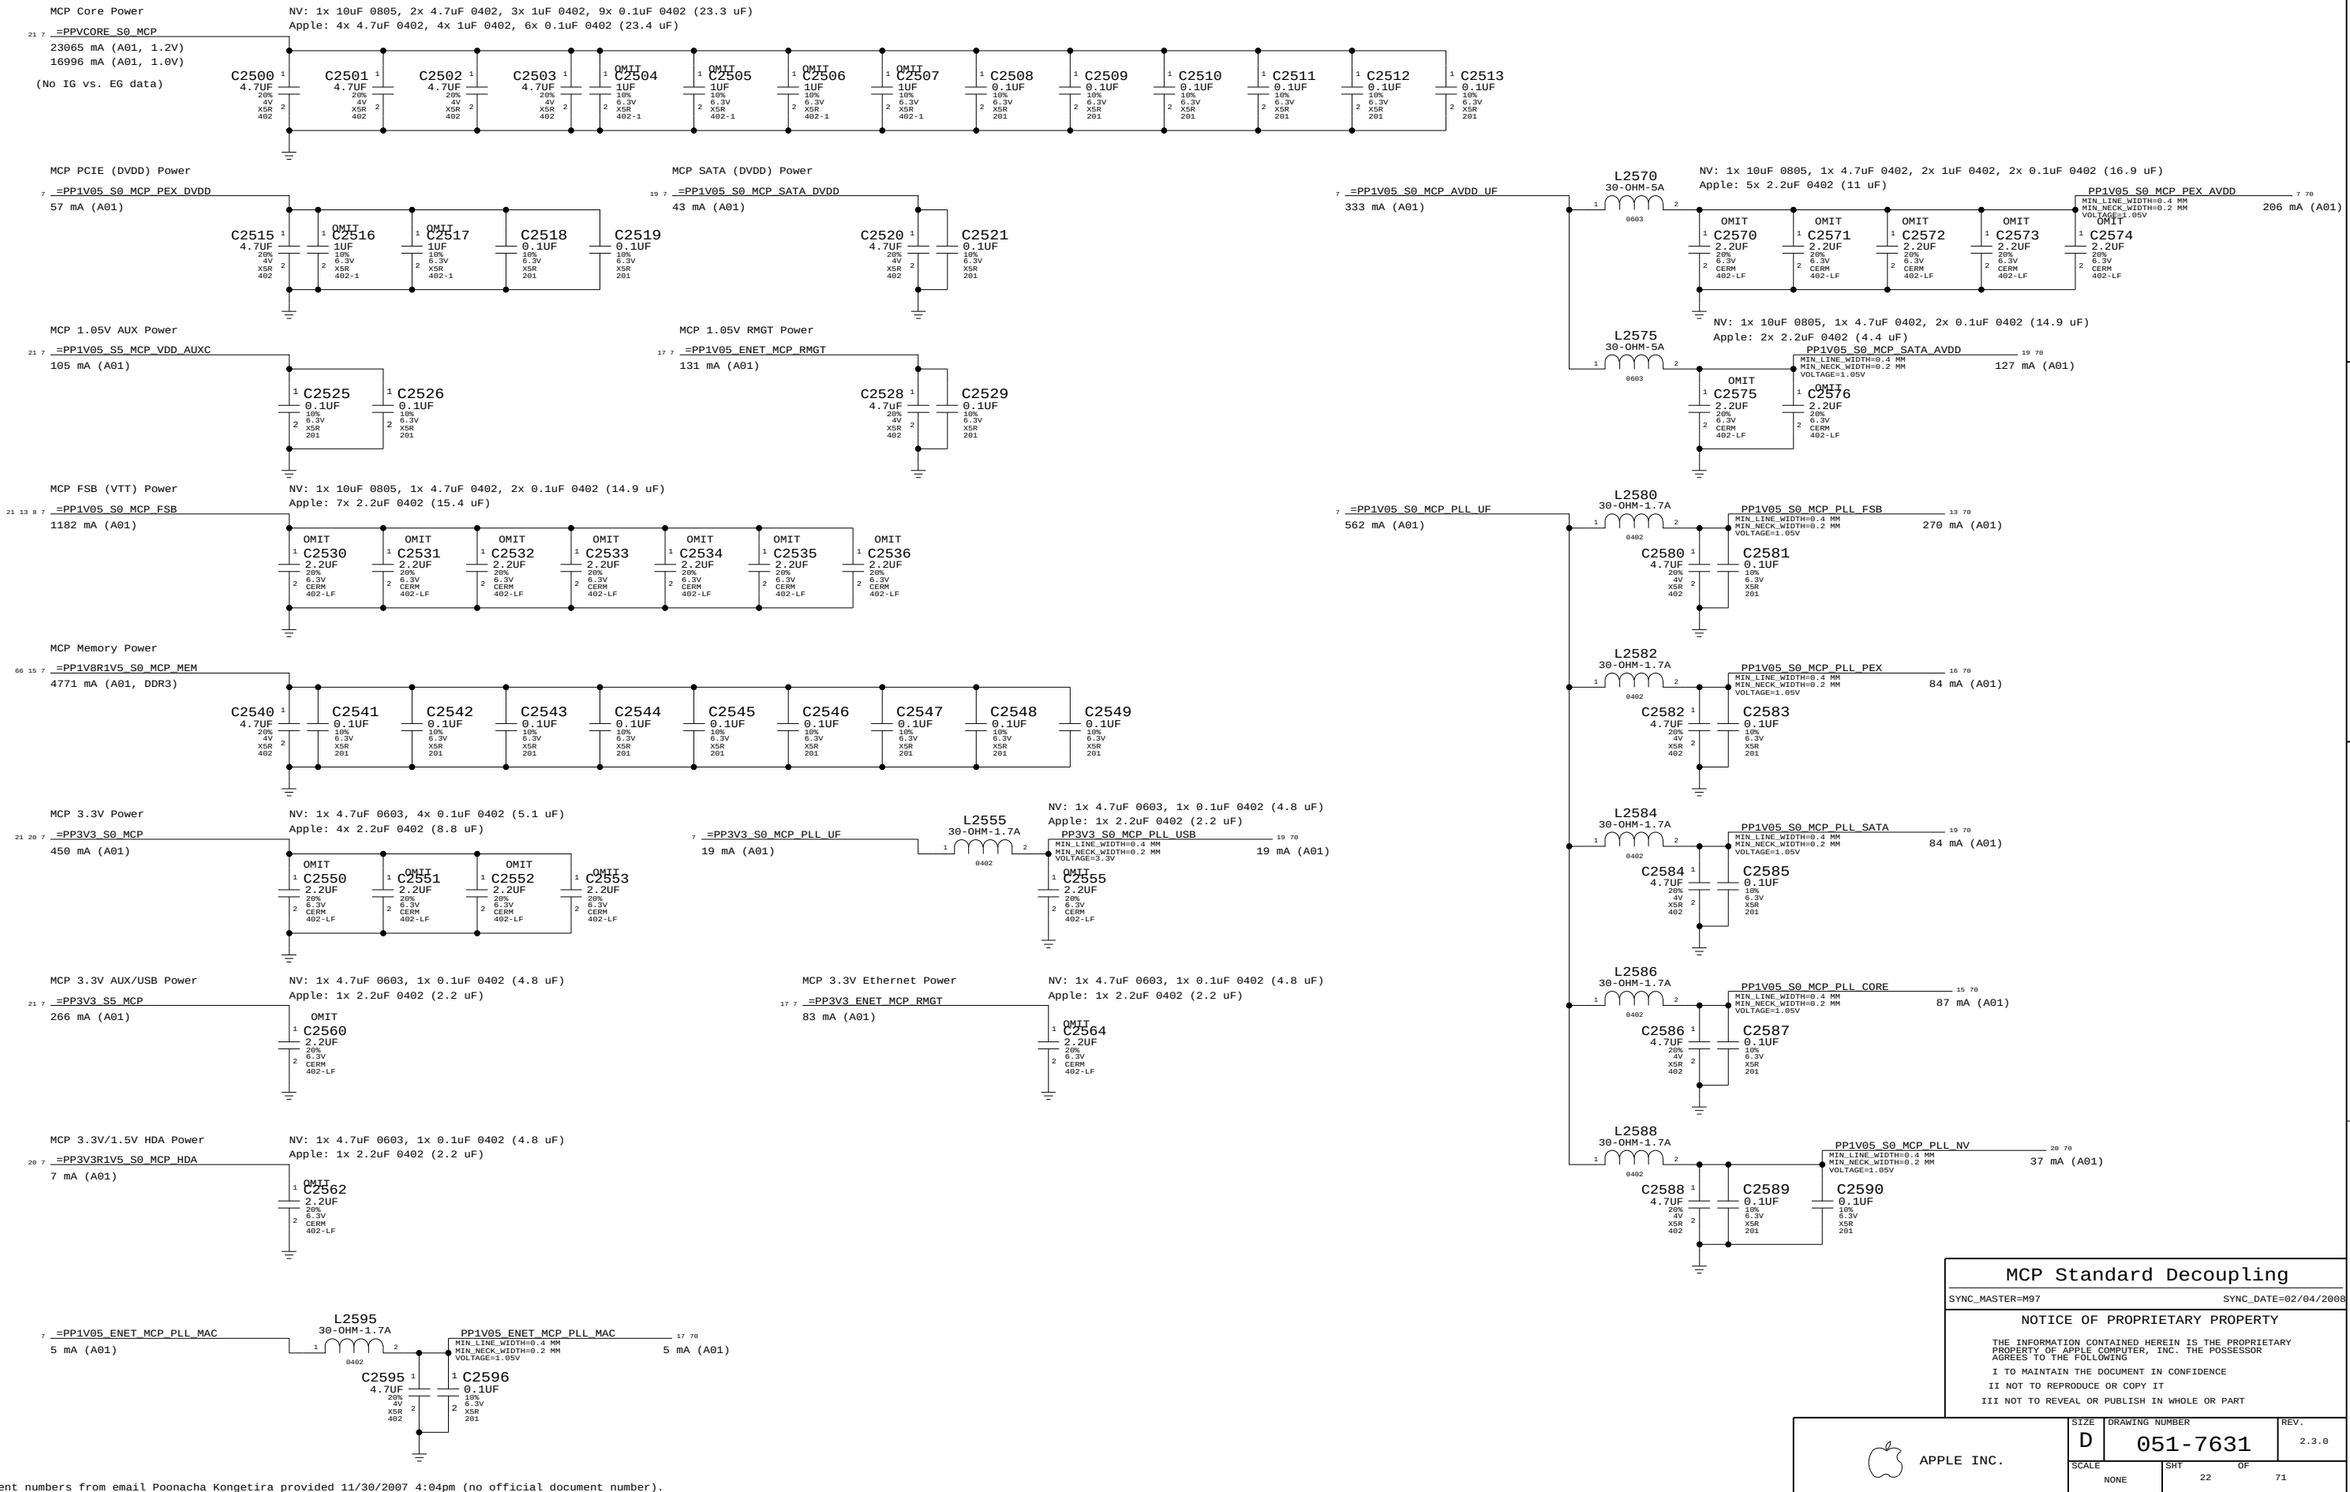

WWW.AliSaler.Com

WF: Checklist says 0-ohm resistor placeholder for ferrite bead.

NV: 1x 4.7uF 0603, 1x 0.1uF 0402 (4.8 uF)
Apple: 1x 2.2uF 0402 (2.2 uF)

17 7 =PP3V3R1V8_S0_MCP_IFP_VDD
190 mA (A01, 1.8V)

OMIT
C2610
2.2UF
20%
6.3V
CERM
402-LF

PP3V3_S0_MCP_DAC 21 70

R2650
0
5%
1/16W
MF-LF
402

17 7 =PP1V05_S0_MCP_HDMI_VDD
95 mA (A01)

C2615
4.7UF
20%
4V
X5R
402

C2616
0.1UF
10%
6.3V
X5R
201

67 17 MCP_HDMI_RSET
67 17 MCP_HDMI_VPROBE

NO STUFF
C2620
0.1UF
10%
6.3V
X5R
201

R2620
1K
1%
1/20W
MF
201

67 17 MCP_IFPAB_RSET
67 17 MCP_IFPAB_VPROBE

NO STUFF
C2630
0.1UF
10%
6.3V
X5R
201

NO STUFF
R2630
1K
1%
1/20W
MF
201

WF: Checklist says 0-ohm resistor placeholder for ferrite bead.
NV: 1x 4.7uF 0603, 1x 0.1uF 0402 (4.8 uF)
Apple: ???

7 =PP3V3_S0_MCP_VPLL_UF
16 mA (A01)

L2640
30-OHM-1.7A
0402

PP3V3_S0_MCP_VPLL
MIN_LINE_WIDTH=0.4 MM
MIN_NECK_WIDTH=0.2 MM
VOLTAGE=3.3V

17 70
16 mA (A01)

C2640
4.7UF
20%
6.3V
CERM
603

C2641
0.1uF
10%
6.3V
X5R
201

SYNC FROM M97

Current numbers from email Poonacha Kongetira provided 11/30/2007 4:04pm (no official document number).

MCP Graphics Support

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	23	71

WWW.AliSaler.Com

RTC Power Sources

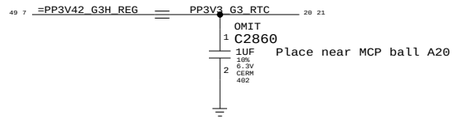

RTC Crystal

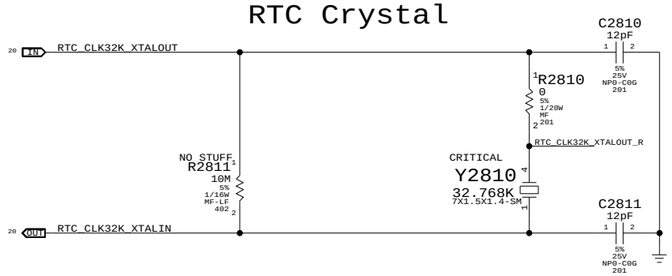

MCP 25MHz Crystal

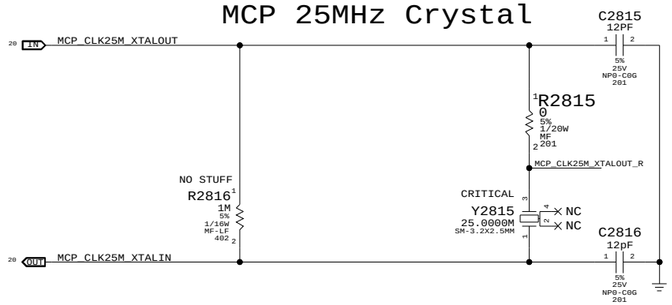

MCP S0 PWRGD & CPU_VLD

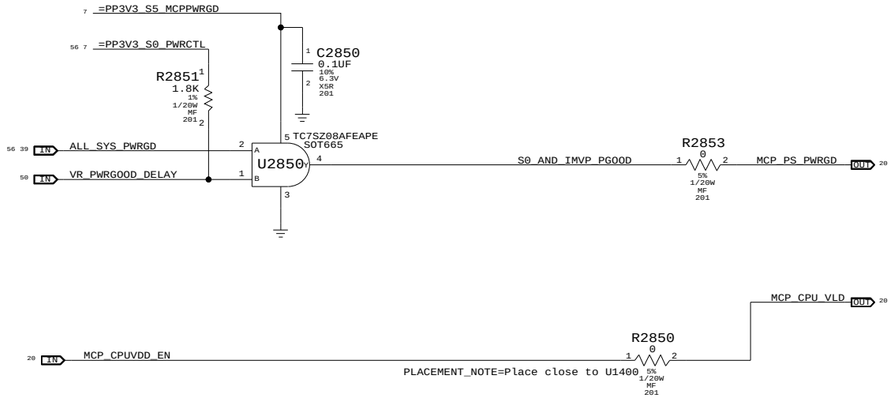

SYNC FROM M97
CHANGED RTC POWER SOURCE TO DIRECT CONNECTION
ADDED MCPSEQ_SMC LOGIC

Platform Reset Connections

LPC Reset (Unbuffered)



PCIE Reset (Unbuffered)

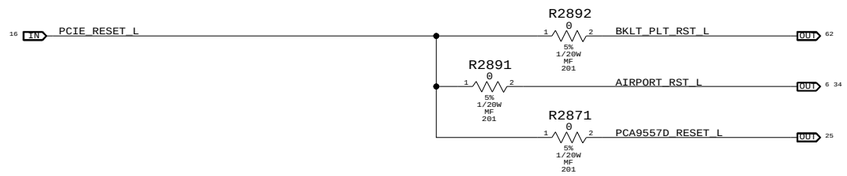

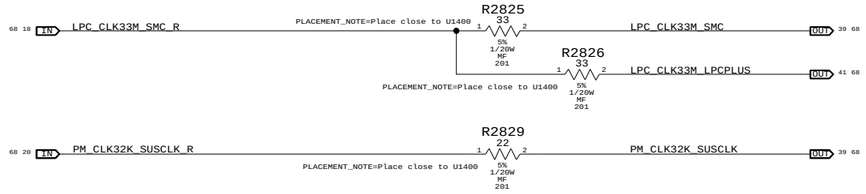

Reset Button

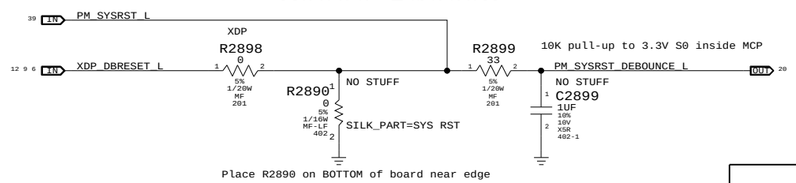

SB Misc		
SYNC_MASTER=M97		SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.	SIZE	DRAWING NUMBER	REV.
	D	051-7631	2.3.0
	SCALE: NONE	SHT 24 OF 71	

WWW.AliSaler.Com

Page Notes

Power aliases required by this page:
- =PP3V3_S3_VREFMRGN
- =PP3V3_S5_VREFMRGN
- =PPVTT_S3_DDR_BUF

Signal aliases required by this page:
- =I2C_VREFDACS_SCL
- =I2C_VREFDACS_SDA
- =I2C_PCA9557D_SCL
- =I2C_PCA9557D_SDA

BOM options provided by this page:
VREFMRGN

	MEM A VREF DQ	MEM A VREF CA	MEM B VREF DQ	MEM B VREF CA	CPU FSB VREF
DAC channel	A	B	A	B	C
Min DAC code	0x00	0x00	0x00	0x00	0x00
Max DAC code	0x87	0x87	0x87	0x87	0x55
Max sink I	-3.75 mA	-3.75 mA	-3.75 mA	-3.75 mA	-0.91 mA
Max source I	5 mA	5 mA	5 mA	5 mA	0.52 mA
Nominal Vref	0.75 V	0.75 V	0.75 V	0.75 V	0.70 V
Min Vref	0.375 V	0.375 V	0.375 V	0.375 V	0.091 V
Max Vref	1.250 V	1.250 V	1.250 V	1.250 V	1.044 V
Vref Stepping (per DAC LSB)	6.5 mV	6.5 mV	6.5 mV	6.5 mV	11.2 mV

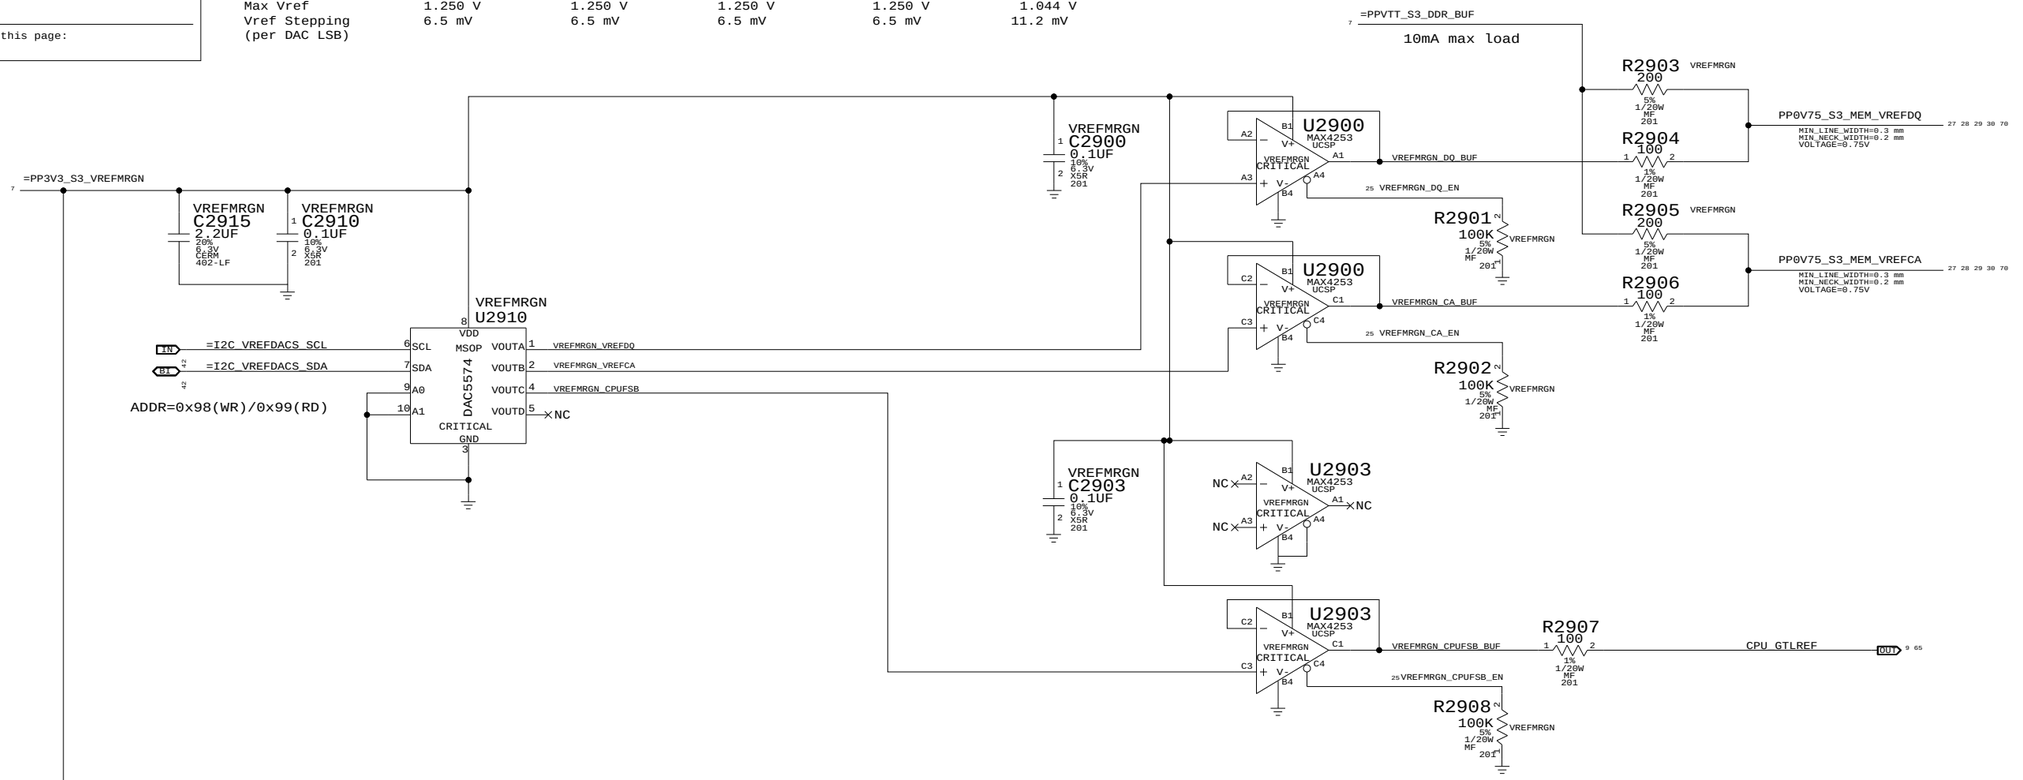

Required zero ohm resistors when no VREF margining circuit stuffed

PART NUMBER	QTY	DESCRIPTION	REFERENCE DES	CRITICAL	BOM OPTION
116S0004	1	RES,MTL FILM,0,5%,0402,SM,LF	R2903	CRITICAL	NO_VREFMRGN
116S0004	1	RES,MTL FILM,0,5%,0402,SM,LF	R2905	CRITICAL	NO_VREFMRGN

FSB/DDR3 Vref Margining

SYNC_MASTER=BEN SYNC_DATE=01/15/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 25 OF 71

WWW.AliSaler.Com

DDR3 RESET Support

MCP79 cannot control this signal directly since it must be high in sleep and MCP MEM rails are not powered in sleep.

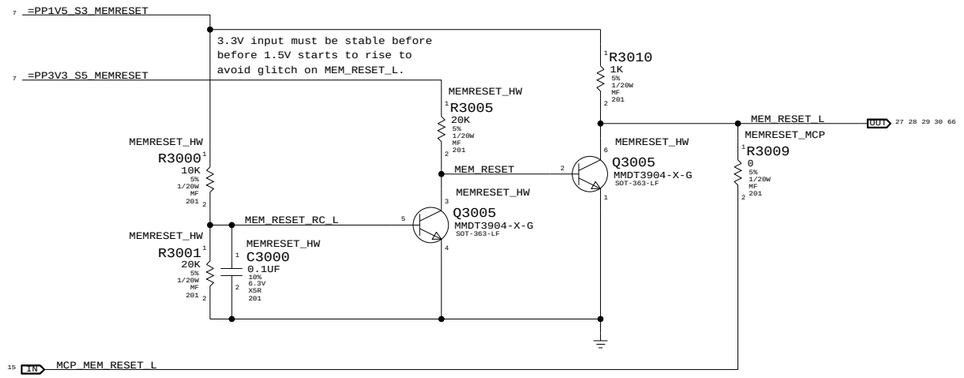

DDR3 Support

SYNC_MASTER=T18_MLB SYNC_DATE=01/30/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 26 OF 71	

WWW.AliSaler.Com

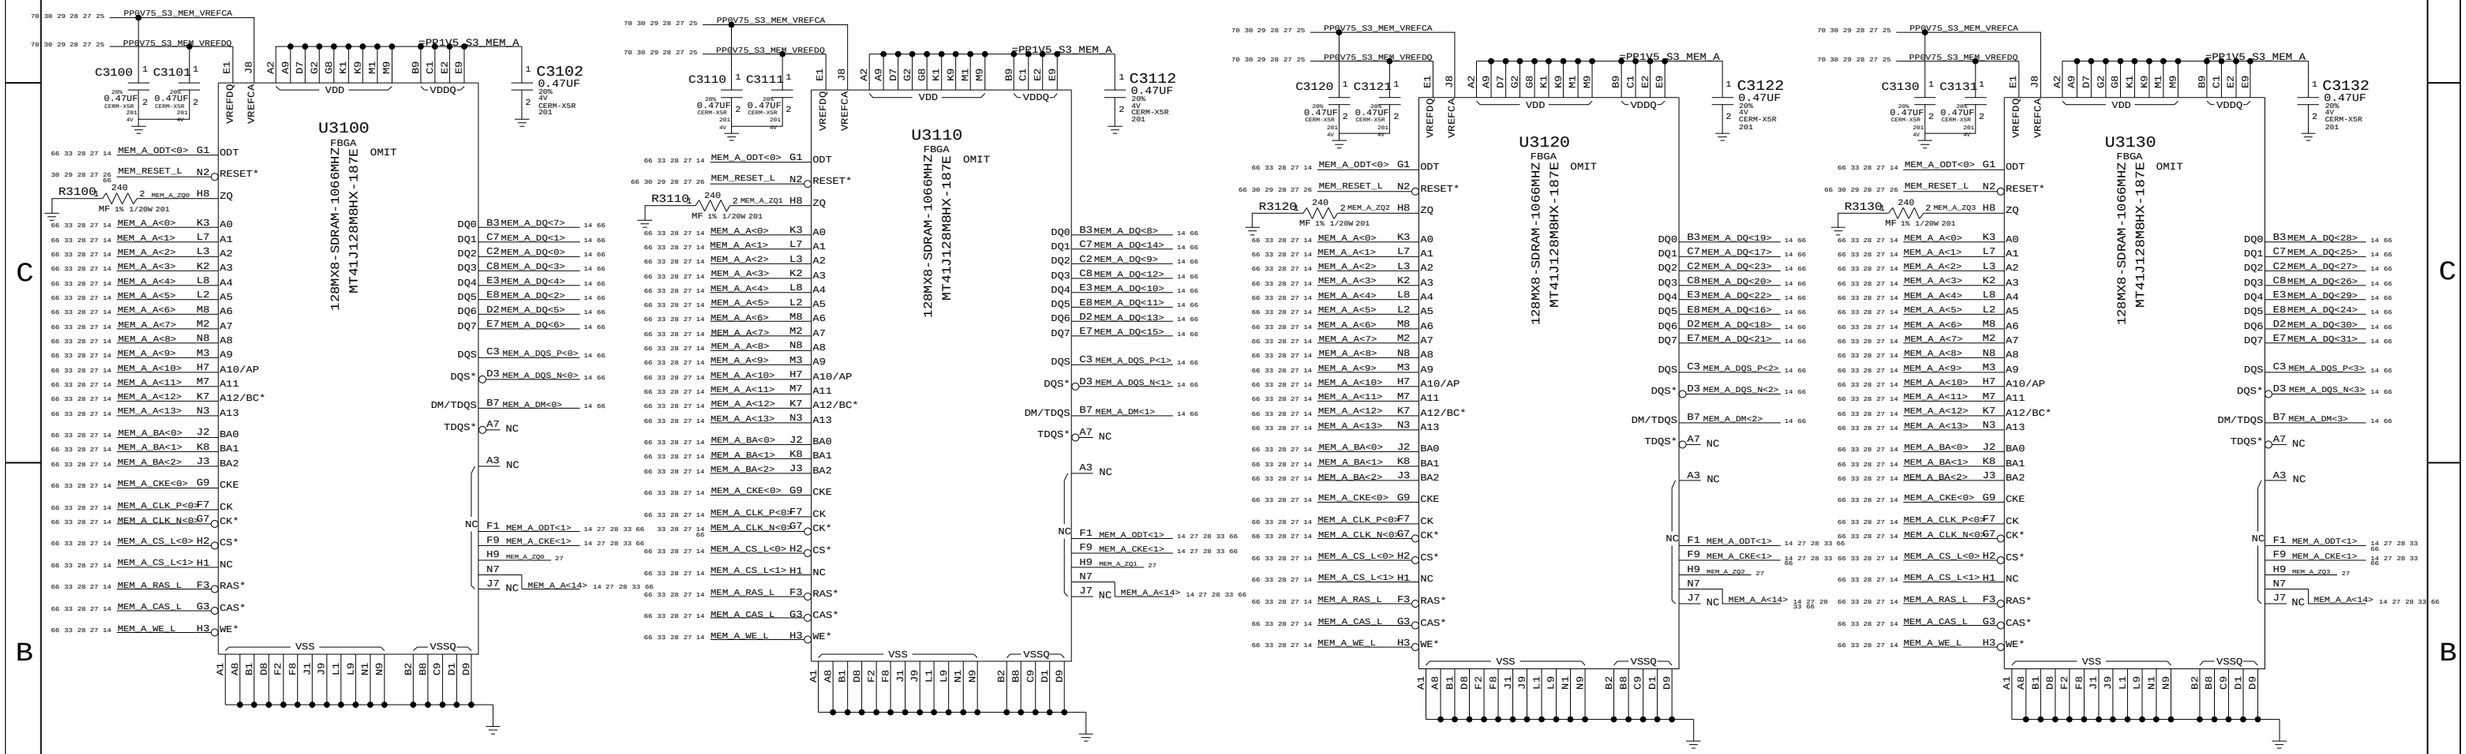

A14/A15 FOR 2G/4G MONO ONLY
CS1 IS FOR 2G DDP RANK CONTROL

DDR3 DRAM Channel A (0-31)

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	27	71

WWW.AliSaler.Com

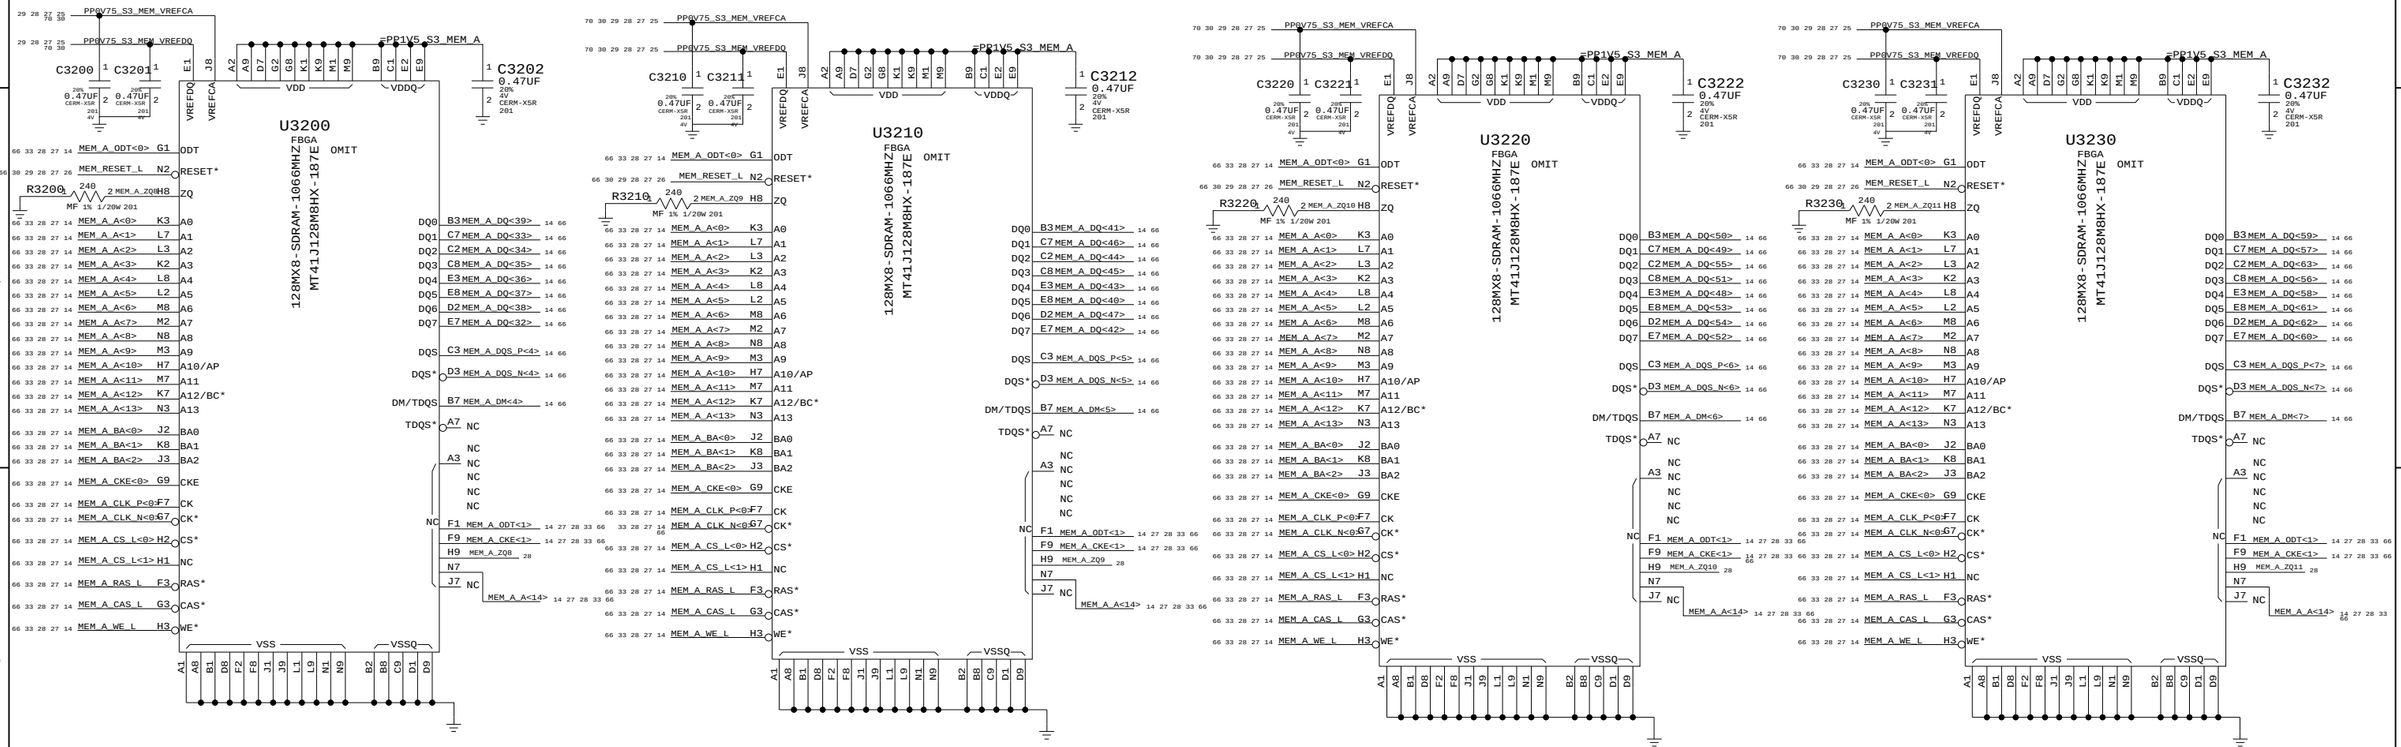

A14/A15 FOR 2G/4G MONO ONLY
CS1 IS FOR 2G DDP RANK CONTROL

DDR3 DRAM Channel A (32-63)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 28 OF 71	

WWW.AliSaler.Com

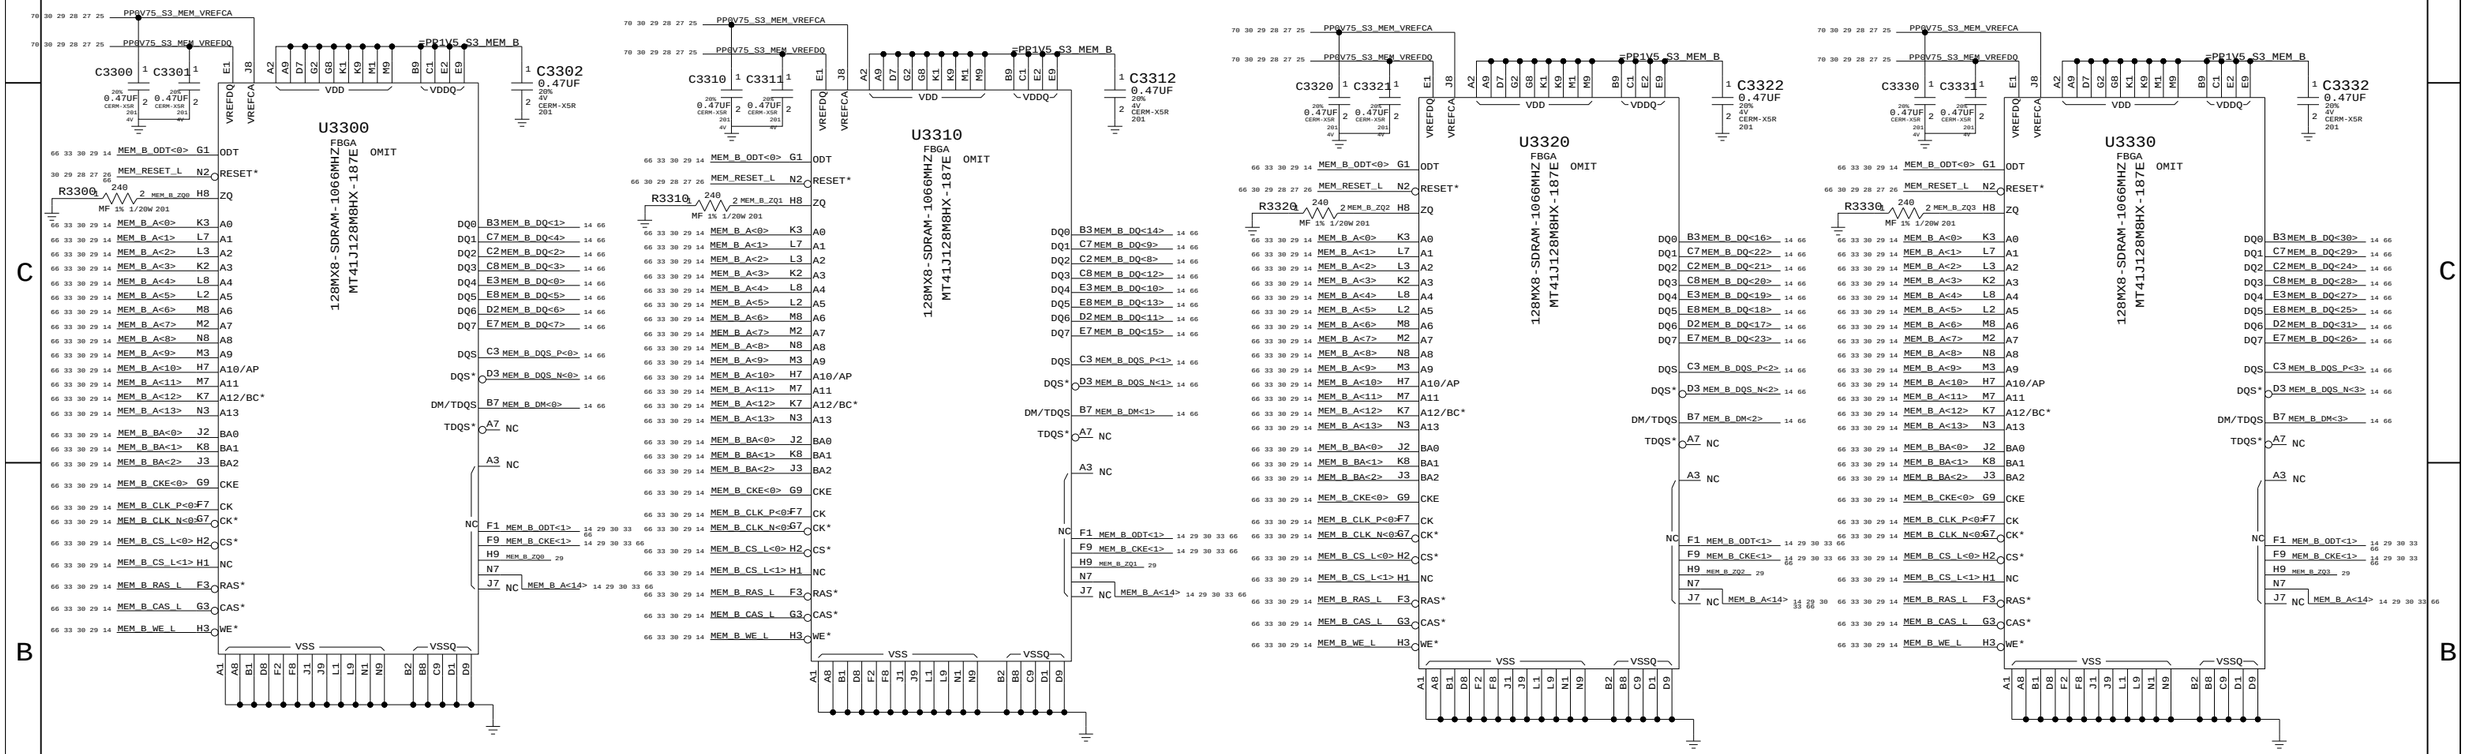

A14/A15 FOR 2G/4G MONO ONLY
CS1 IS FOR 2G DDP RANK CONTROL

DDR3 DRAM Channel B (0-31)

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	29	71

WWW.AliSaler.Com

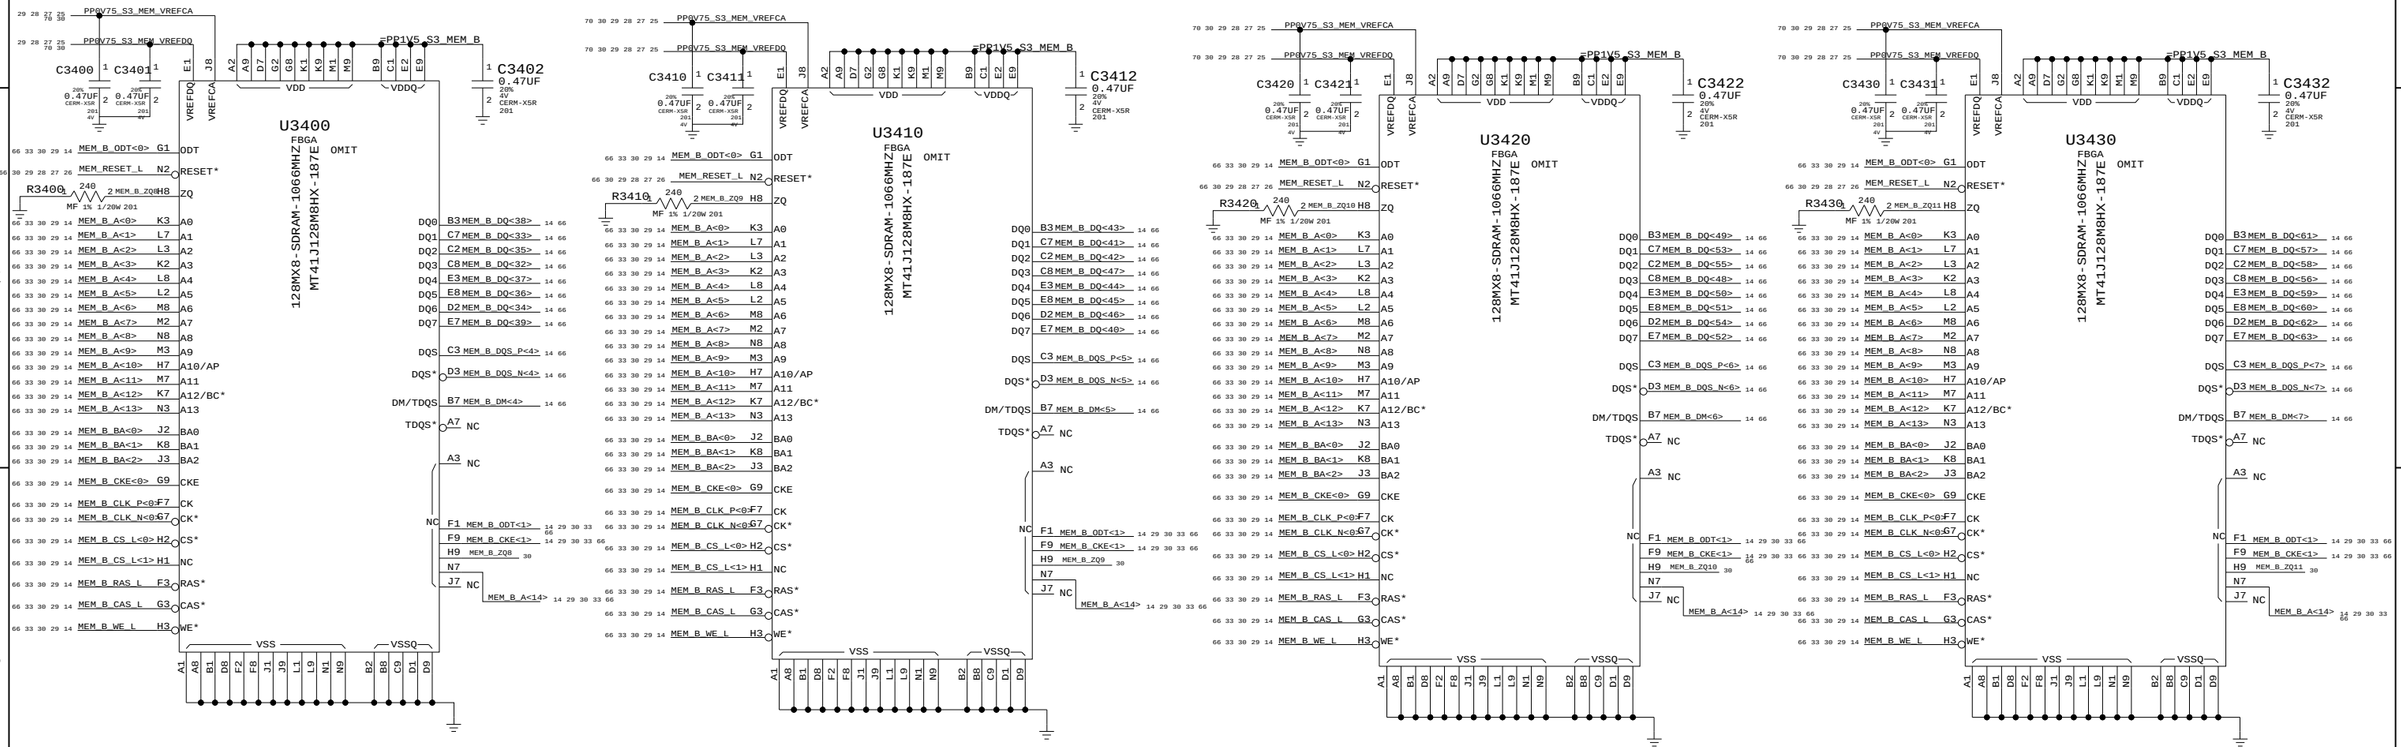

A14/A15 FOR 2G/4G MONO ONLY
CS1 IS FOR 2G DDP RANK CONTROL

DDR3 DRAM Channel B (32-63)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	30	71

WWW.AliSaler.Com

33 31 28 27 7 =PP1V5_S3_MEM_A

OMIT C3500 2.2UF 20% 6.3V CERM 402-LF
OMIT C3501 2.2UF 20% 6.3V CERM 402-LF

2 CAPS ALONG PACKAGE EDGE

OMIT C3510 2.2UF 20% 6.3V CERM 402-LF
OMIT C3511 2.2UF 20% 6.3V CERM 402-LF
OMIT C3512 2.2UF 20% 6.3V CERM 402-LF

OMIT C3520 2.2UF 20% 6.3V CERM 402-LF
OMIT C3521 2.2UF 20% 6.3V CERM 402-LF

OMIT C3504 2.2UF 20% 6.3V CERM 402-LF
OMIT C3505 2.2UF 20% 6.3V CERM 402-LF

OMIT C3514 2.2UF 20% 6.3V CERM 402-LF
OMIT C3515 2.2UF 20% 6.3V CERM 402-LF
OMIT C3516 2.2UF 20% 6.3V CERM 402-LF

OMIT C3524 2.2UF 20% 6.3V CERM 402-LF
OMIT C3525 2.2UF 20% 6.3V CERM 402-LF

COLUMN OF THREE CAPS BETWEEN PACKAGES

33 31 28 27 7 =PP1V5_S3_MEM_A

OMIT C3530 2.2UF 20% 6.3V CERM 402-LF
OMIT C3531 2.2UF 20% 6.3V CERM 402-LF

OMIT C3540 2.2UF 20% 6.3V CERM 402-LF
OMIT C3541 2.2UF 20% 6.3V CERM 402-LF
OMIT C3542 2.2UF 20% 6.3V CERM 402-LF

OMIT C3550 2.2UF 20% 6.3V CERM 402-LF
OMIT C3551 2.2UF 20% 6.3V CERM 402-LF

2 CAPS ALONG PACKAGE EDGE

OMIT C3534 2.2UF 20% 6.3V CERM 402-LF
OMIT C3535 2.2UF 20% 6.3V CERM 402-LF

OMIT C3544 2.2UF 20% 6.3V CERM 402-LF
OMIT C3545 2.2UF 20% 6.3V CERM 402-LF
OMIT C3546 2.2UF 20% 6.3V CERM 402-LF

OMIT C3554 2.2UF 20% 6.3V CERM 402-LF
OMIT C3555 2.2UF 20% 6.3V CERM 402-LF

COLUMN OF THREE CAPS BETWEEN PACKAGES

APPROXIMATE CAP ARRANGEMENT

TWO 0402 CAPS ALONG PACKAGE EDGE

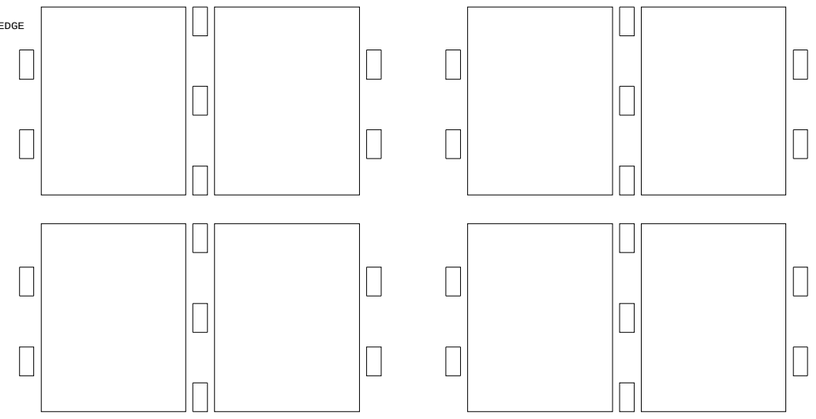

COLUMN OF THREE 0402 CAPS BETWEEN PACKAGES

DDR BYPASSING 1

SYNC_MASTER=MEMORY SYNC_DATE=06/20/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	31	71

WWW.AliSaler.Com

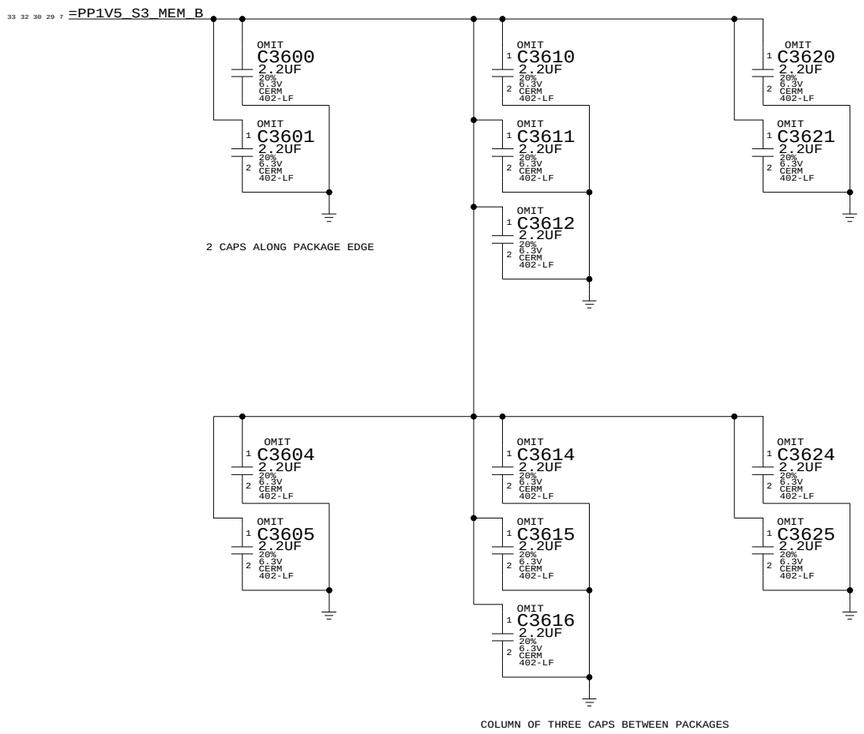
33 32 30 29 7 =PP1V5_S3_MEM_B
OMIT C3600 2.2UF 20% 6.3V CERM 402-LF
OMIT C3601 2.2UF 20% 6.3V CERM 402-LF
2 CAPS ALONG PACKAGE EDGE
OMIT C3610 2.2UF 20% 6.3V CERM 402-LF
OMIT C3611 2.2UF 20% 6.3V CERM 402-LF
OMIT C3612 2.2UF 20% 6.3V CERM 402-LF
OMIT C3620 2.2UF 20% 6.3V CERM 402-LF
OMIT C3621 2.2UF 20% 6.3V CERM 402-LF
OMIT C3604 2.2UF 20% 6.3V CERM 402-LF
OMIT C3605 2.2UF 20% 6.3V CERM 402-LF
OMIT C3614 2.2UF 20% 6.3V CERM 402-LF
OMIT C3615 2.2UF 20% 6.3V CERM 402-LF
OMIT C3616 2.2UF 20% 6.3V CERM 402-LF
OMIT C3624 2.2UF 20% 6.3V CERM 402-LF
OMIT C3625 2.2UF 20% 6.3V CERM 402-LF
COLUMN OF THREE CAPS BETWEEN PACKAGES

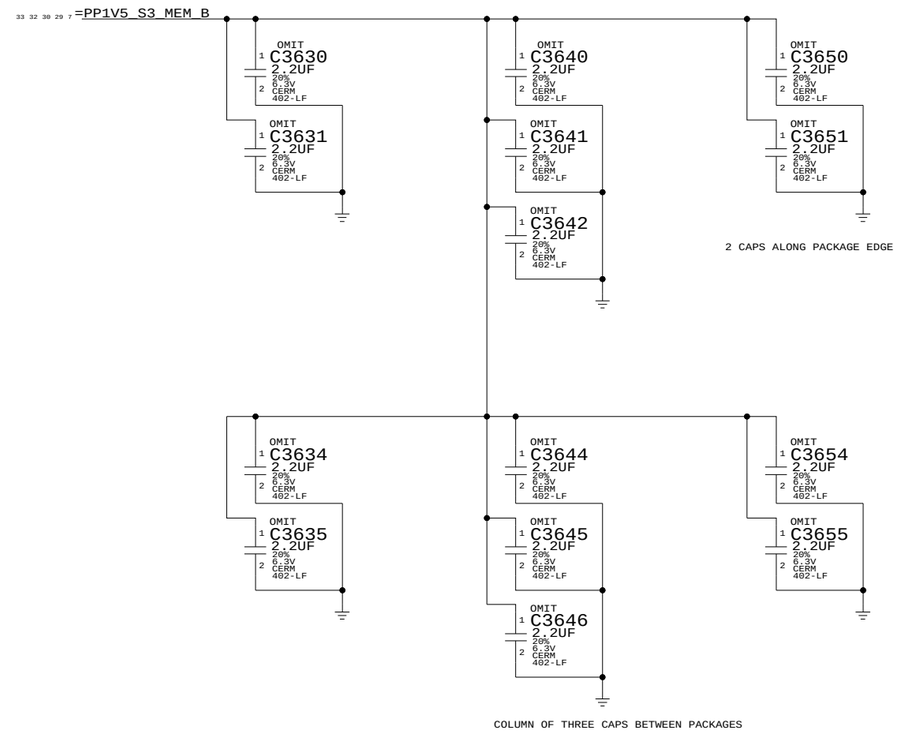
33 32 30 29 7 =PP1V5_S3_MEM_B
OMIT C3630 2.2UF 20% 6.3V CERM 402-LF
OMIT C3631 2.2UF 20% 6.3V CERM 402-LF
OMIT C3640 2.2UF 20% 6.3V CERM 402-LF
OMIT C3641 2.2UF 20% 6.3V CERM 402-LF
OMIT C3642 2.2UF 20% 6.3V CERM 402-LF
OMIT C3650 2.2UF 20% 6.3V CERM 402-LF
OMIT C3651 2.2UF 20% 6.3V CERM 402-LF
2 CAPS ALONG PACKAGE EDGE
OMIT C3634 2.2UF 20% 6.3V CERM 402-LF
OMIT C3635 2.2UF 20% 6.3V CERM 402-LF
OMIT C3644 2.2UF 20% 6.3V CERM 402-LF
OMIT C3645 2.2UF 20% 6.3V CERM 402-LF
OMIT C3646 2.2UF 20% 6.3V CERM 402-LF
OMIT C3654 2.2UF 20% 6.3V CERM 402-LF
OMIT C3655 2.2UF 20% 6.3V CERM 402-LF
COLUMN OF THREE CAPS BETWEEN PACKAGES

APPROXIMATE CAP ARRANGEMENT

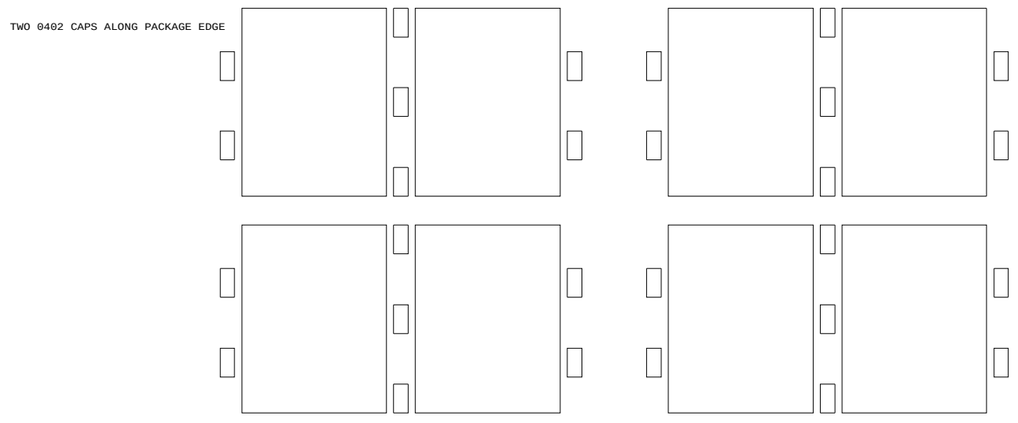

DDR BYPASSING 2

SYNC_MASTER=MEMORY SYNC_DATE=06/20/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	32	71

WWW.AliSaler.Com

MEM CLOCK TERMINATION

Place RC end termination after last DRAM
Place Source Cterm at neckdown at first DRAM

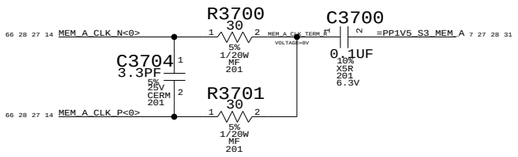

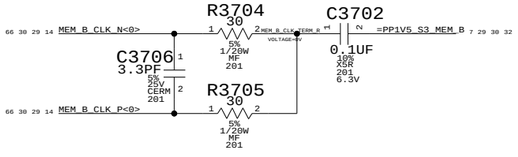

Unused Clock Termination



JEDEC recommends 30 Ohm term to VTT for CS,CKE,ODT and 36 Ohm for BA,A,RAS,CAS,WE

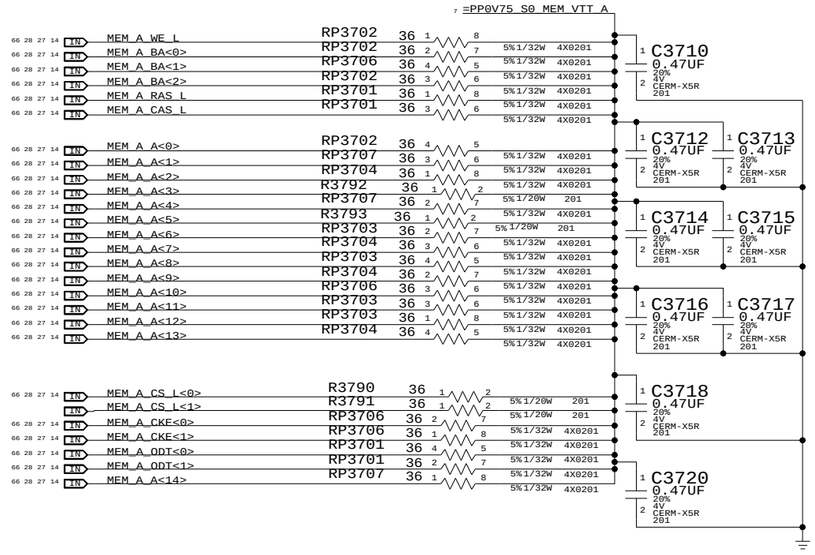

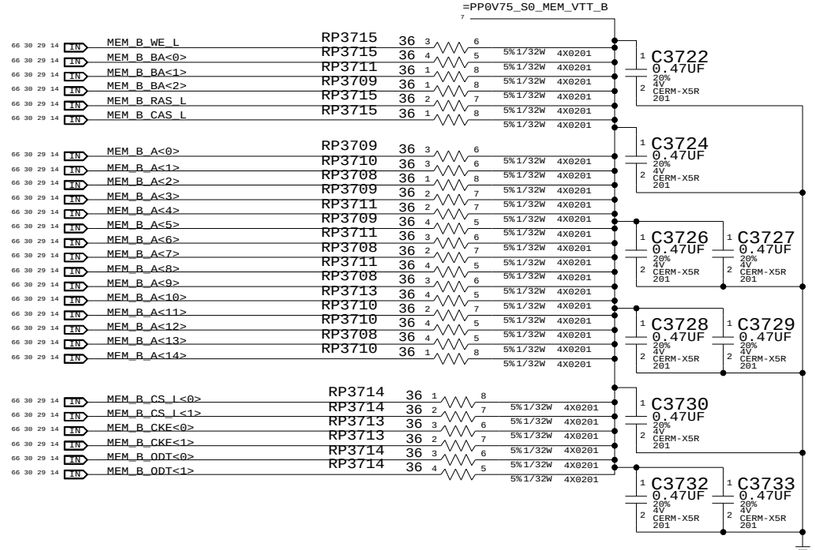

Memory Active Termination

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 33 OF 71	

WWW.AliSaler.Com

M93 WIRELESS AIRPORT & BT CONNECTOR

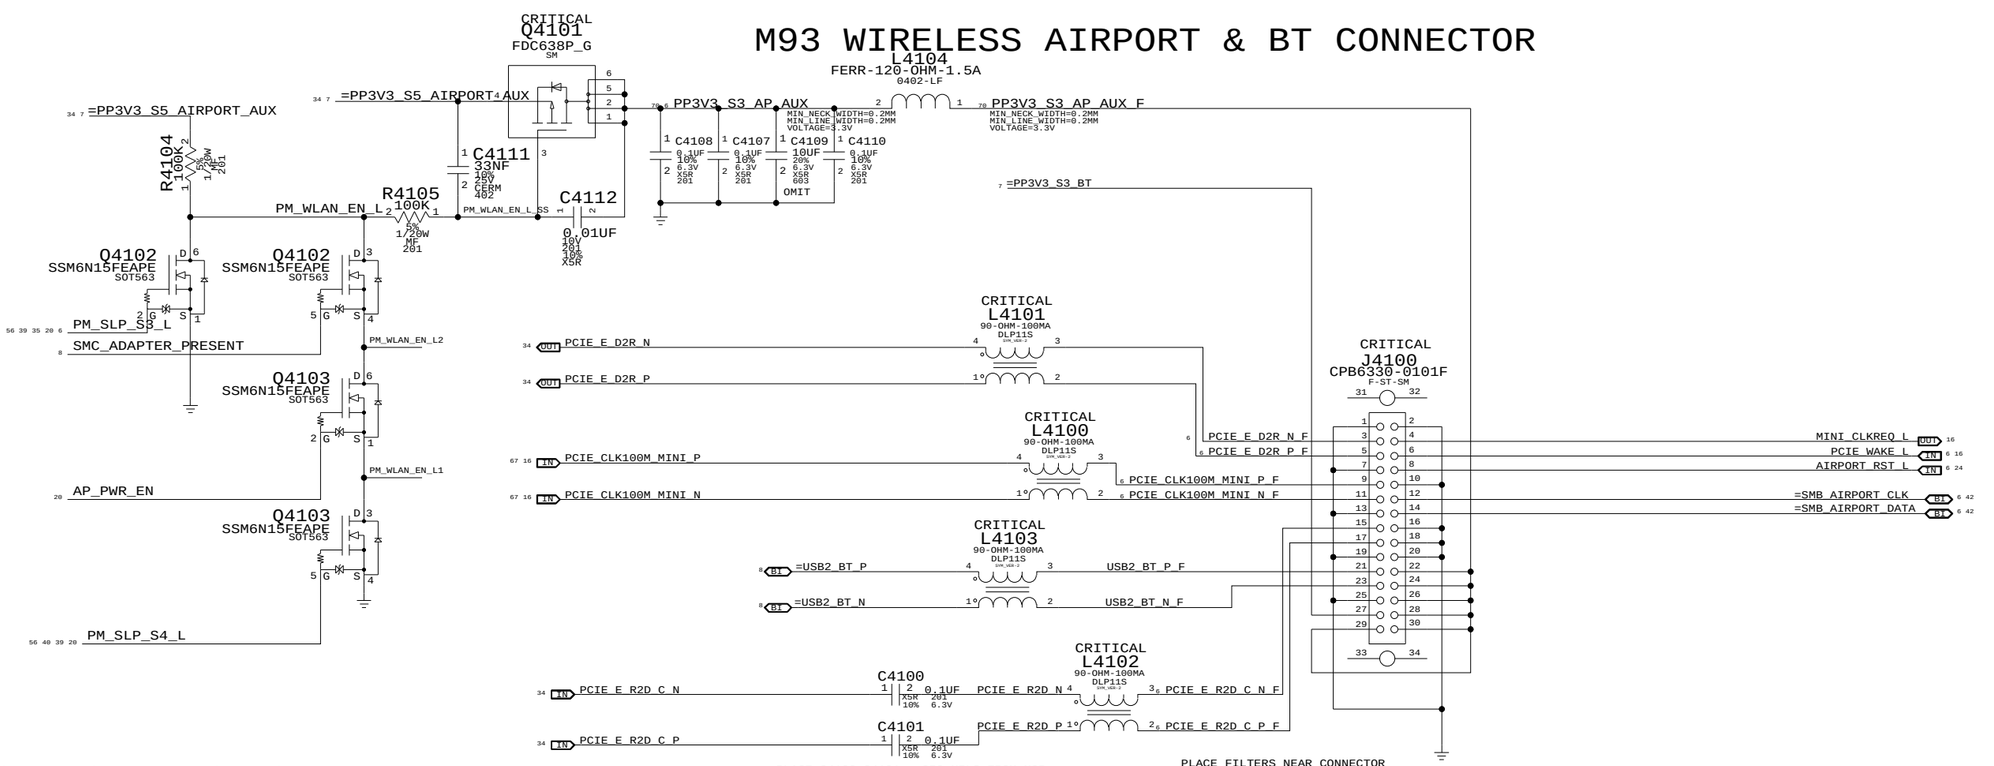

APN:516S0580

Wireless M93 Connector

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	34	71

WWW.AliSaler.Com

Micro-DisplayPort / USB to RIO Hatch Assembly

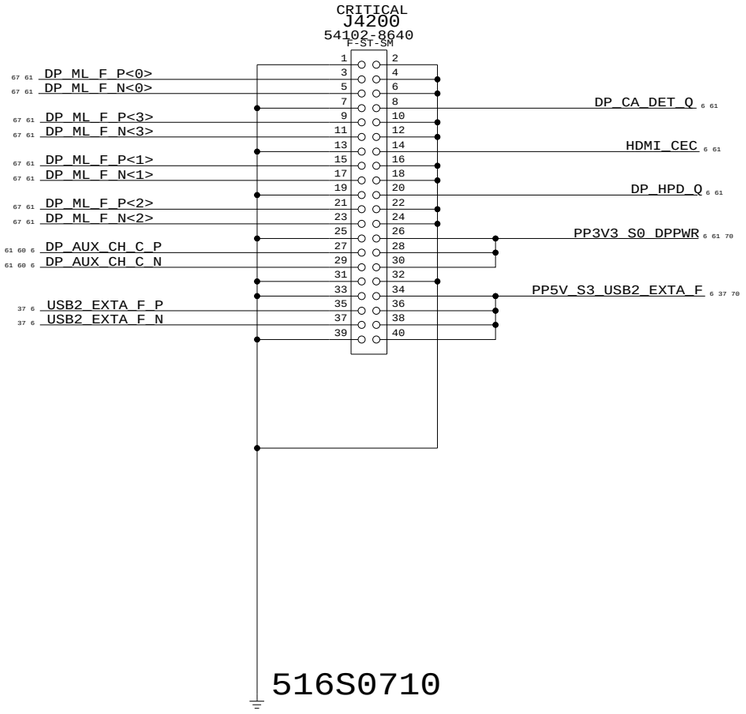

Audio Connector

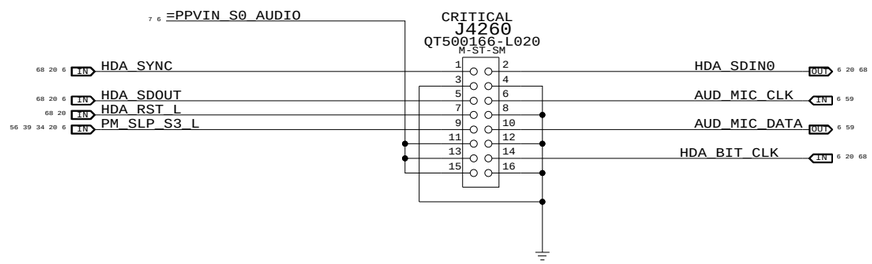

Hatch and Audio Connectors

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	35	71

WWW.AliSaler.Com

SATA HDD PORT

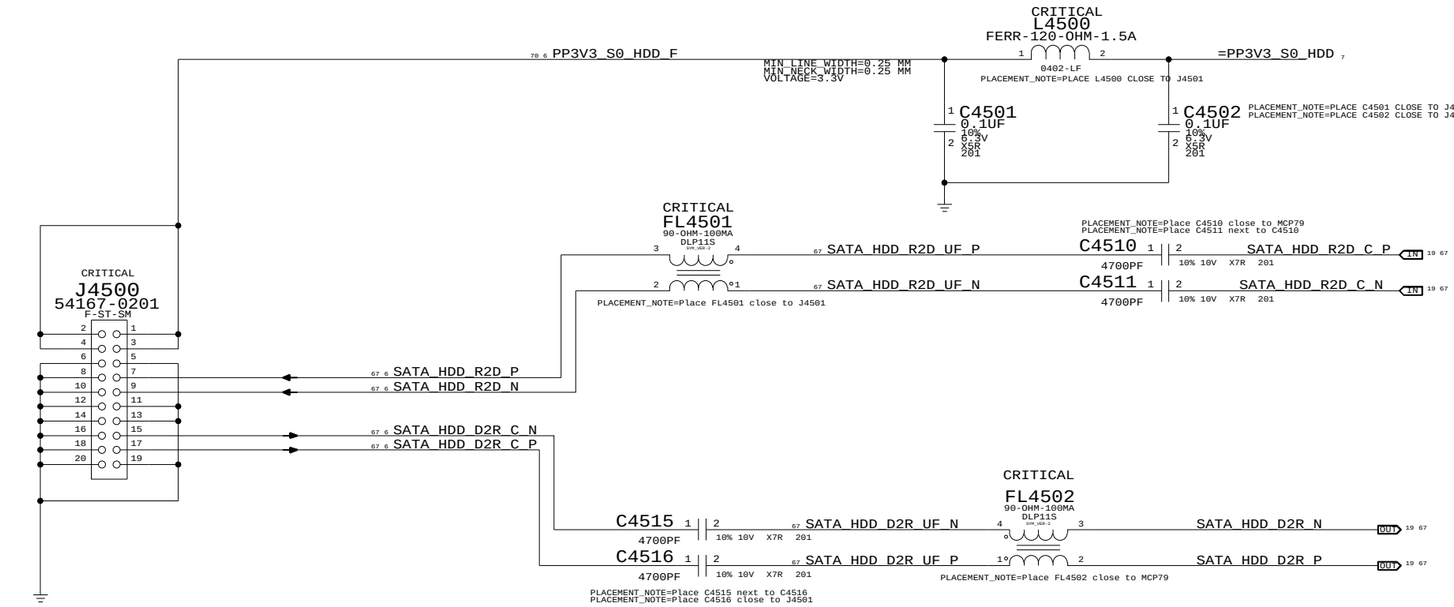

516S0678

SATA Connectors

SYNC_MASTER=CHANGZHANG SYNC_DATE=02/05/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 36 OF 71	

WWW.AliSaler.Com

USB 2.0 CONNECTOR

CONNECT TO 5V S5 or S3 PER LAYOUT

CRITICAL
L4602
FERR-120-OHM-3A
0603
PP5V_S3_USB2_EXTA_F
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.2MM
VOLTAGE=5V

CRITICAL
C4610
100UF
20%
6.3V
POLY-TANT
CASE-B2-SM

ROUTE USB DATA LINES AS DIFFERENTIAL PAIRS

CRITICAL
L4600
90-OHM-100MA
DLP11S

=PP5V_S3_EXTUSB

OMIT
C4613
10uF
20%
6.3V
X5R
603

C4612
0.1UF
10%
6.3V
X5R
201

CRITICAL
U4600
TPS2052B
MSOP

PP5V_S3_USB2_EXTA
MIN_LINE_WIDTH=0.6MM
MIN_NECK_WIDTH=0.2MM
VOLTAGE=5V

IN
OUT1
OC1*
EN1
OUT2
OC2*
EN2
GND
TPAD

USB_EXTA_MUXED_N
USB_EXTA_MUXED_P

PP5V_S3_USB2_EXTA_F
USB2_EXTA_F_N
USB2_EXTA_F_P

CONNECT TO RIO CONNECTOR J4200

CRITICAL
D4600
SC-75
RCLAMP0502B

C4602
0.01UF
10%
10V
X5R
201

LAYOUT NOTE:C4602 IS AN EMC BY-PASS CAP FOR J4200

=USBPWR_EN

DUAL SWITCH HAS GANGED OUTPUT
BOTH SWITCHES WILL TRIP TOGETHER AT 1.5A-2.2A

R4650
1K
5%
1/16W
MF-LF
402

EXTAUSB_OC_F_L
=EXTAUSB_OC_L

C4650
0.47UF
10%
6.3V
CERM-X5R
402

USB/SMC MUX

=PP3V42_G3H_SMCUSBMUX

R4675
100
5%
1/20W
MF
201

PP3V42_G3H_SMCUSBMUX_R
MIN_LINE_WIDTH=0.2 mm
MIN_NECK_WIDTH=0.2 mm
VOLTAGE=3.42V

C4675
0.1UF
10%
6.3V
X5R
201

PLACE C4675 NEAR U4675

R4677
10K
5%
1/20W
MF
201

USB_EXTA_MUXED_P
USB_EXTA_MUXED_N

SMC_RX_L
SMC_TX_L

CRITICAL
U4675
PI3USB102ZLE
TQFN

VCC
M+
M-
Y+
Y-
D+
D-
OE*
SEL
GND

=USB2_EXTA_P
=USB2_EXTA_N

USB_DEBUGPRT_EN_L

SEL=0 CHOOSE SMC
SEL=1 CHOOSE USB

NOSTUFF
R4678
0
5%
1/20W
MF
201

PLACE NEAR U4675

NOSTUFF
R4679
0
5%
1/20W
MF
201

USB EXTERNAL CONNECTORS

SYNC_MASTER=M70 SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 37 OF 71

WWW.AliSaler.Com

IPD Connector

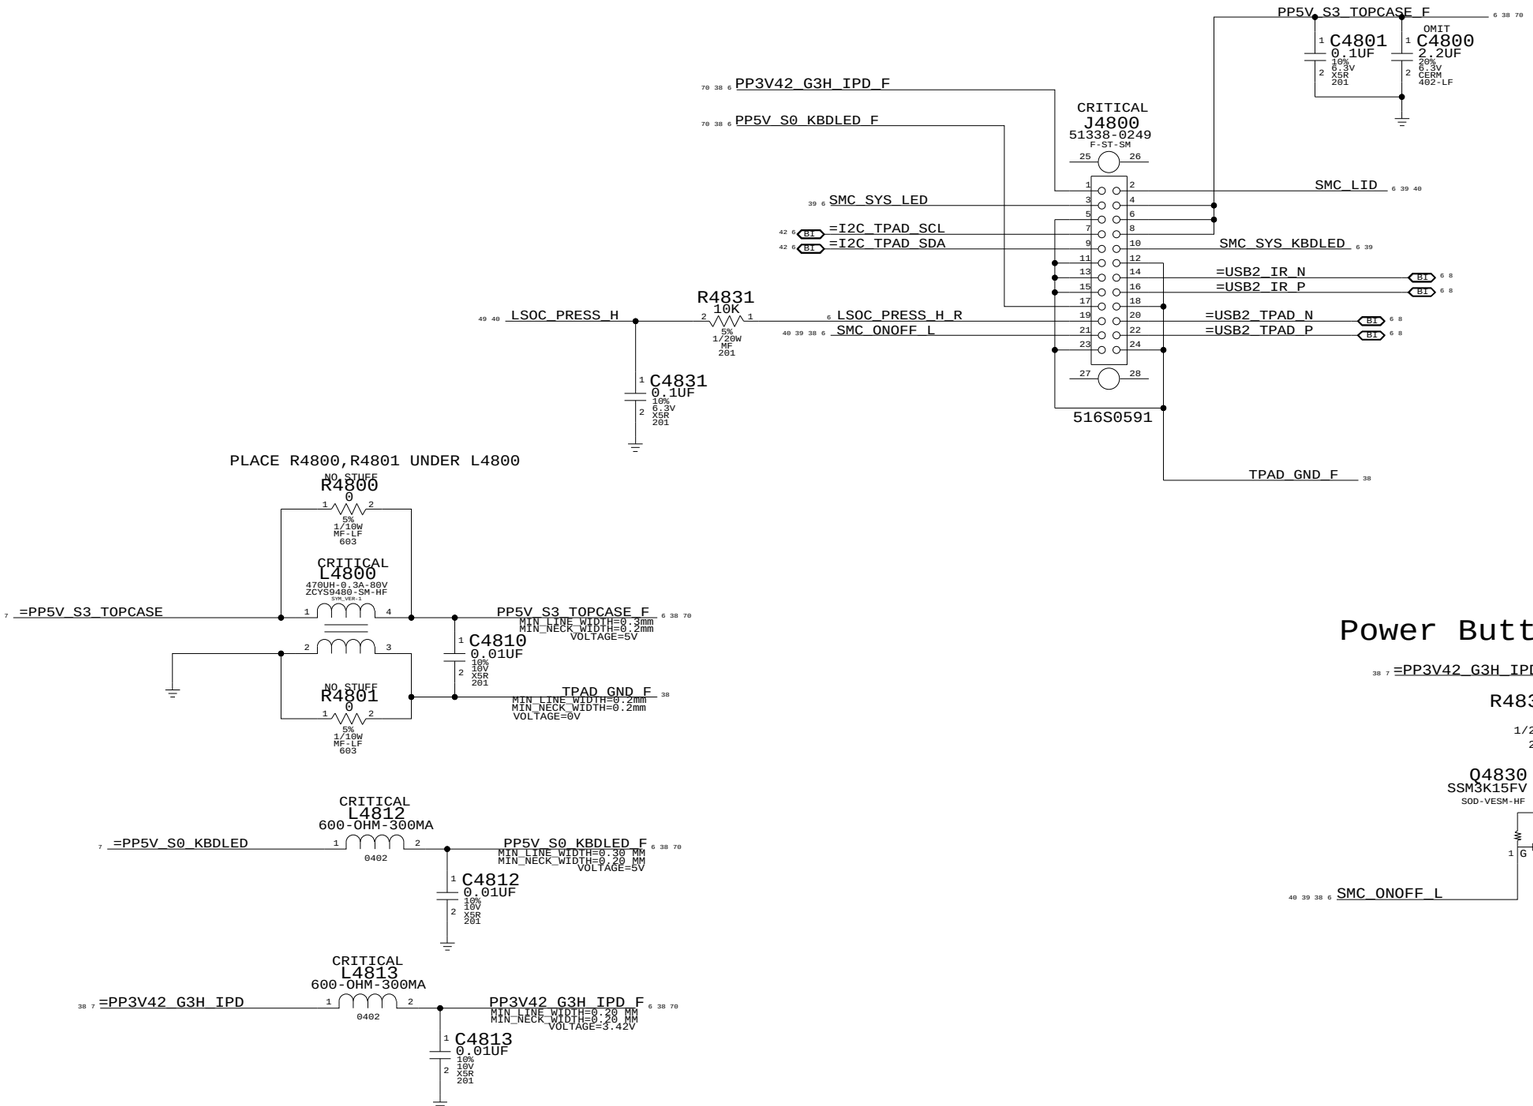

Power Button Inverter



Inverted to drive SMC_RESET logic

IPD Connector

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	38	71

WWW.AliSaler.Com

NOTE: Unused pins have "SMC_Pxx" names. Unused pins designed as outputs can be left floating, those designated as inputs require pull-ups.

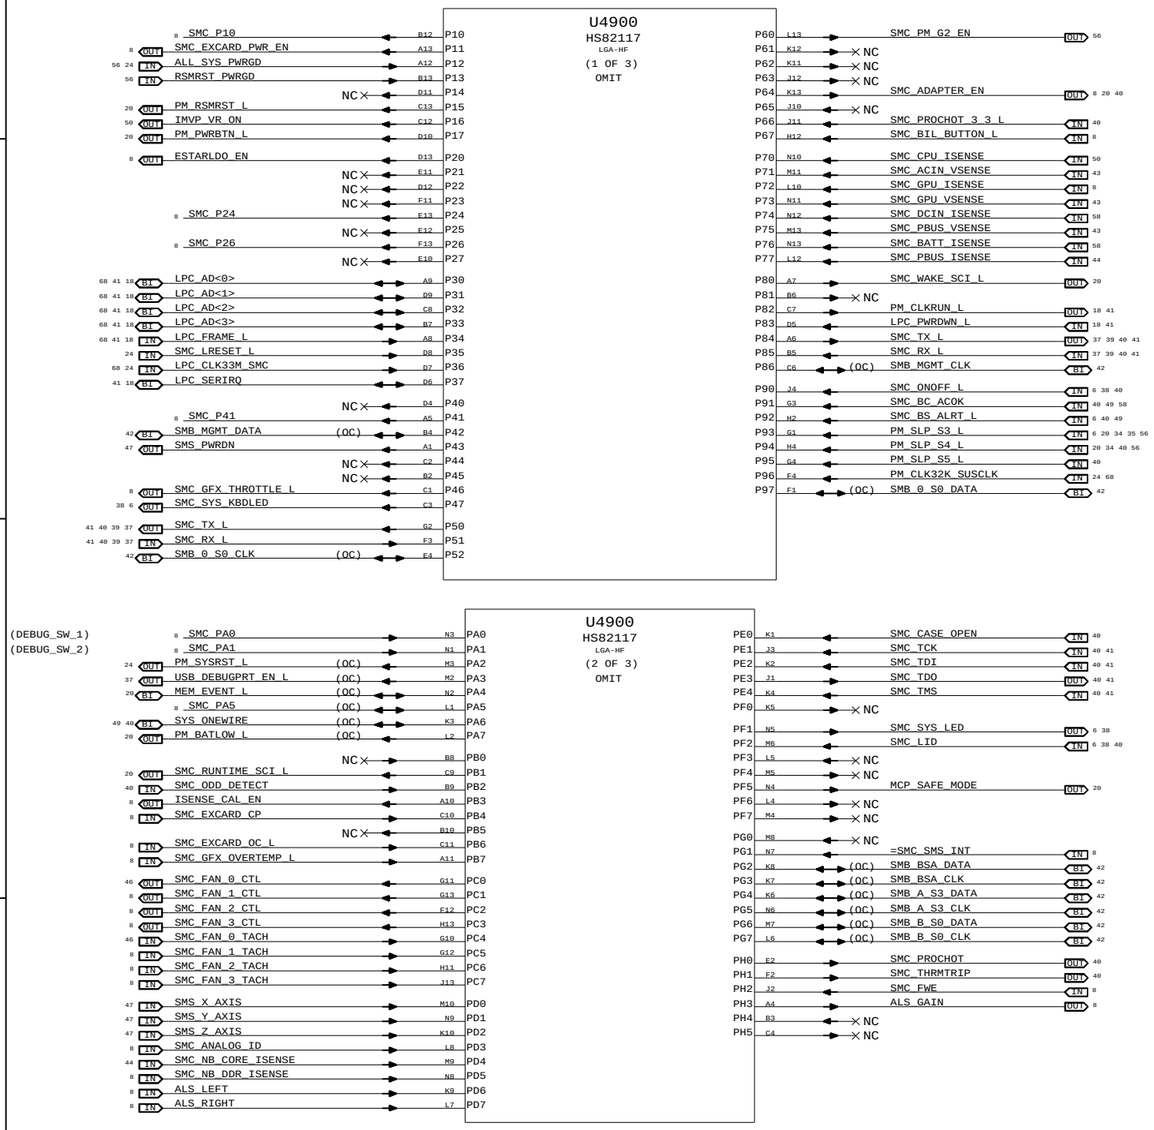

NOTE: P94 and P95 are shorted, P95 could be spare.

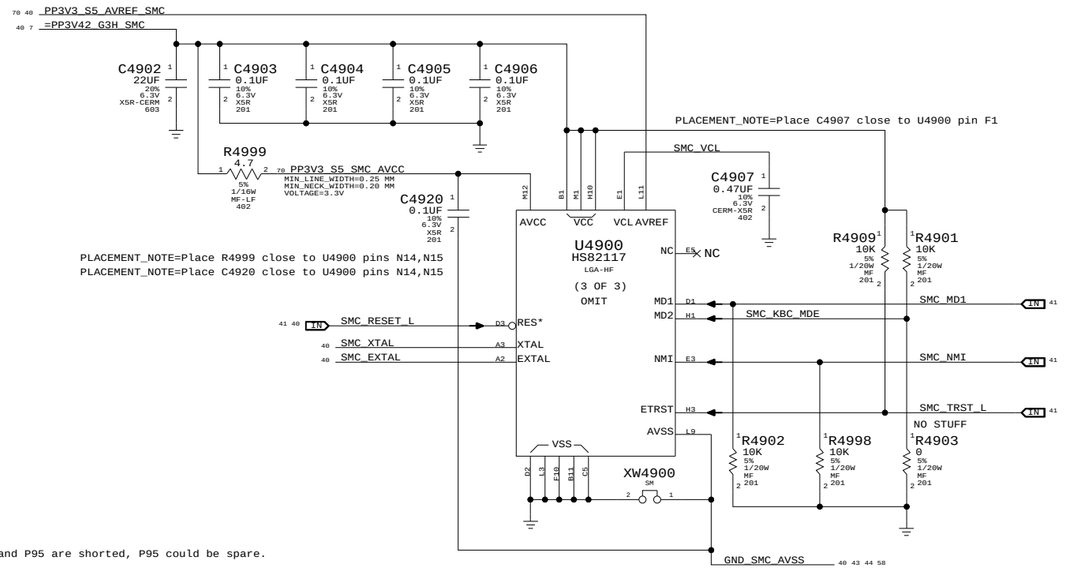

NOTE: SMS Interrupt can be active high or low, rename net accordingly. If SMS interrupt is not used, pull up to SMC rail.

SMC

SYNC_MASTER=M97 SYNC_DATE=02/21/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 39 OF 71	

WWW.AliSaler.Com

SMC Reset Button / Brownout Detect

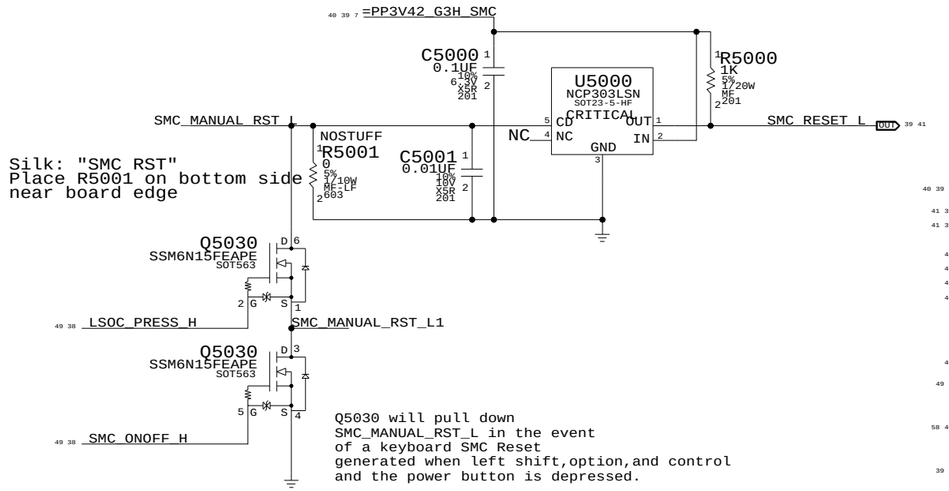

SMC 1.05V to 3.3V Level Shifting

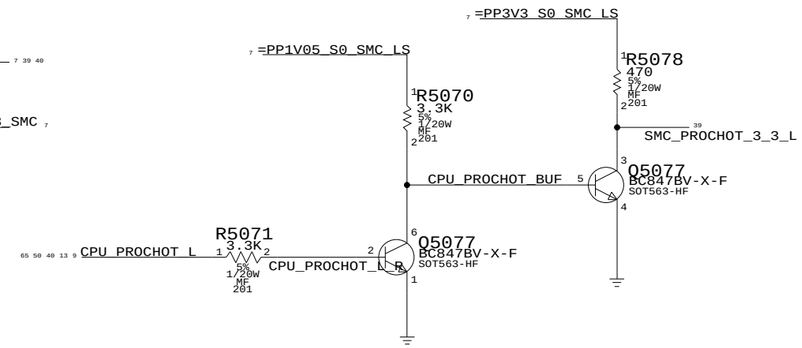

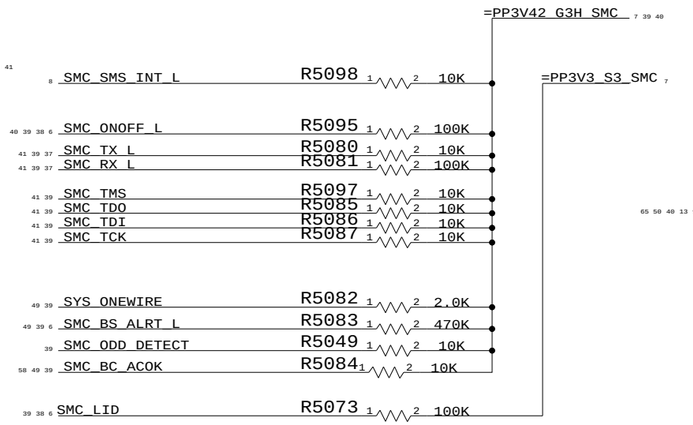

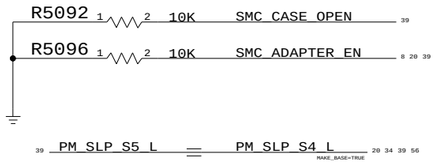

Debug Power Button

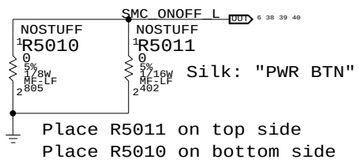
SMC_ONOFF_L
NOSTUFF R5010 0 5% 1/8W MF-LF 805
NOSTUFF R5011 0 5% 1/16W MF-LF 402
Silk: "PWR BTN"
Place R5011 on top side
Place R5010 on bottom side
Place both near board edge

SMC Crystal Circuit



SMC 3.3V to 1.05V Level Shifting

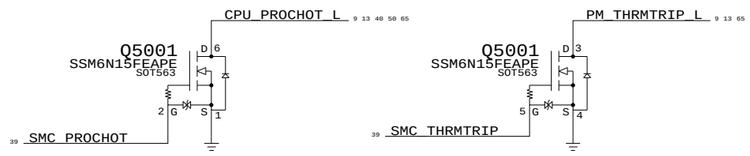

SMC AVREF Supply

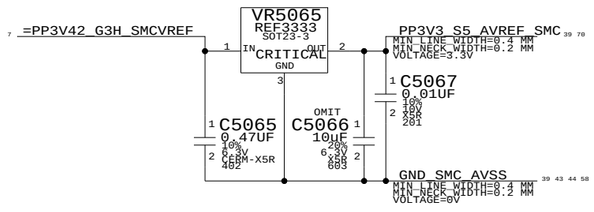

SMC SUPPORT

SYNC_MASTER=M70 SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	40	71

WWW.AliSaler.Com

LPC+SPI Connector

MCP79 SPI Frequency Select		
Frequency	SPI_MOSI	SPI_CLK
31 MHz	0	0
42 MHz	0	1
25 MHz	1	0
1 MHz	1	1

25MHz is selected with R5190 and R5191
Any of the 4 frequencies can be selected w/ R5190,R5191,R5192,R5193

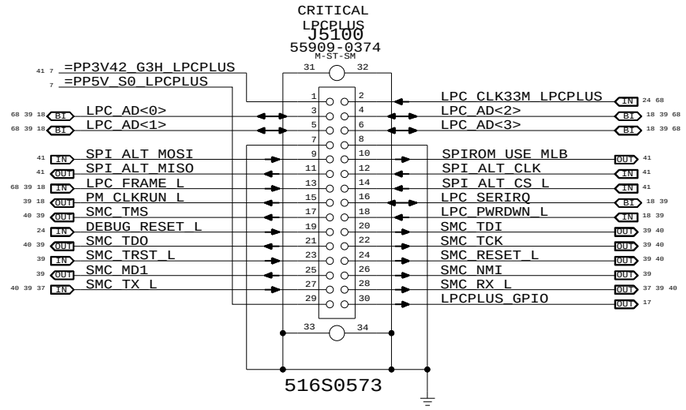

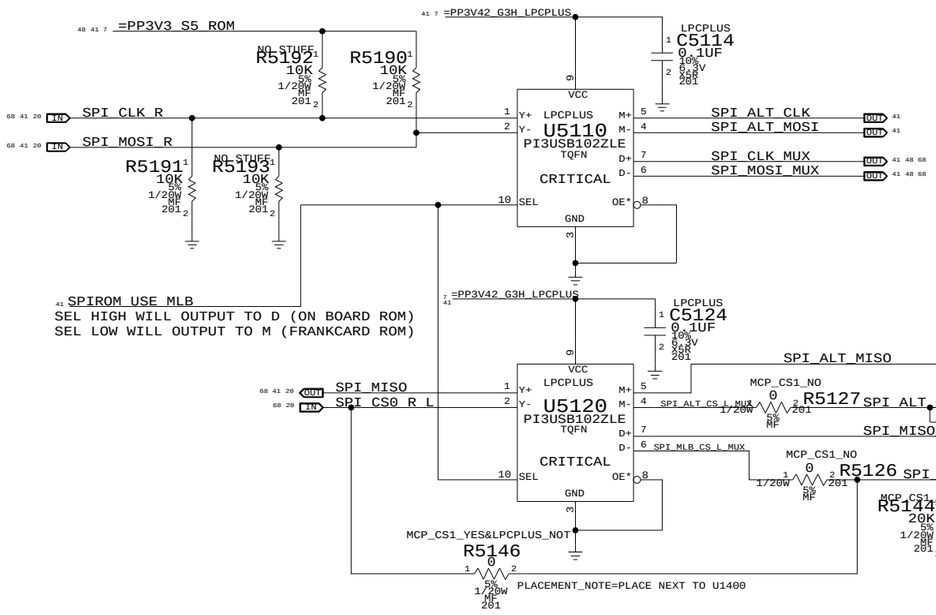

MCP SPI Override Options

Internal MUX in rev B01 does not work as intended.
Now MCP_CS1_YES and MCP_CS1_NO determines external MUX option.

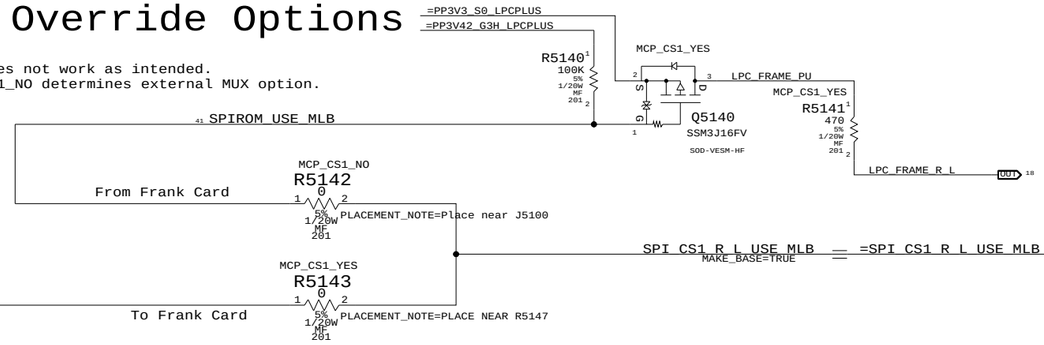

MCP79 Internal SPI MUX Support

Not supported in Rev A01 MCP79 silicon

SPI MUX BYPASS

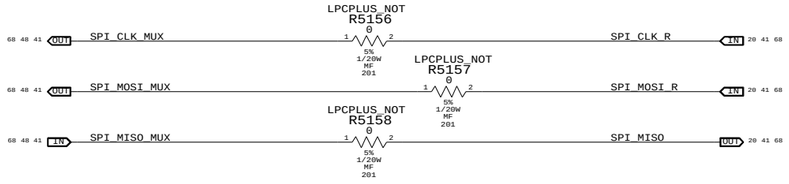

LPC+SPI Debug Connector

SYNC_MASTER=CHANGZHANG SYNC_DATE=01/24/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 41 OF 71	

WWW.AliSaler.Com

SMC "A" SMBus Connections

NOTE: SMC RMT bus remains powered and may be active in S3 state

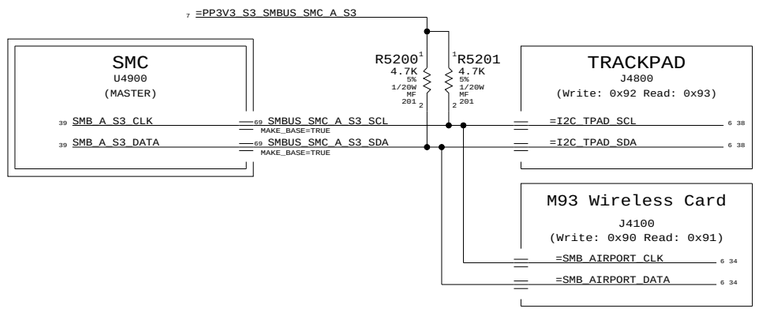

SMC "0" SMBus Connections

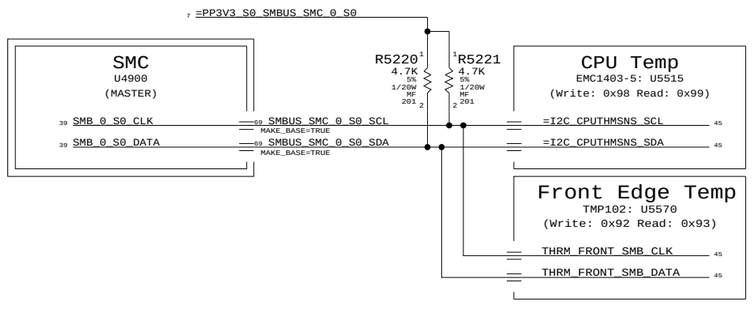

SMC "Management" SMBus Connections

The bus formerly known as "Battery B"

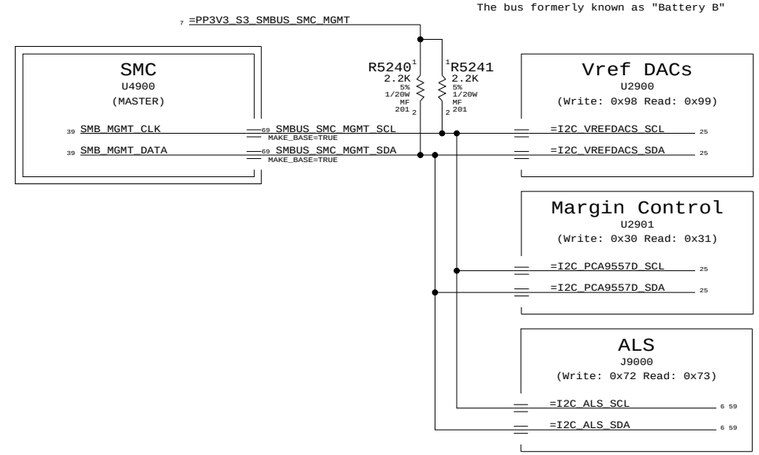

SMC "B" SMBus Connections

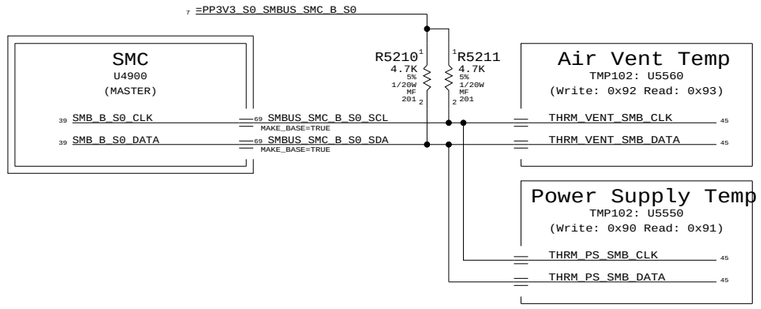

SMC "Battery A" SMBus Connections

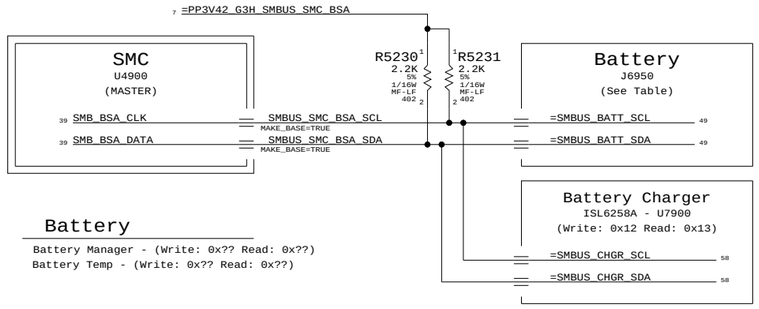

Battery

Battery Manager - (Write: 0x?? Read: 0x??)
Battery Temp - (Write: 0x?? Read: 0x??)

MCP79 SMBUS "0" CONNECTIONS

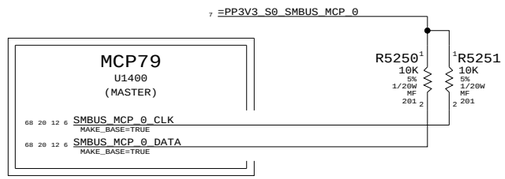

MCP79 SMBUS "1" CONNECTIONS

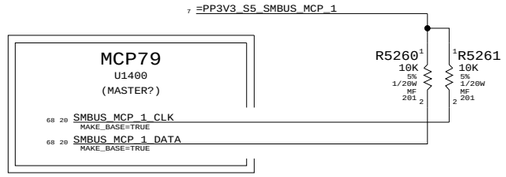

M97 SMBUS CONNECTIONS

SYNC_MASTER=BEN SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 42 OF 71	

WWW.AliSaler.Com

ACIN VOLTAGE SENSE

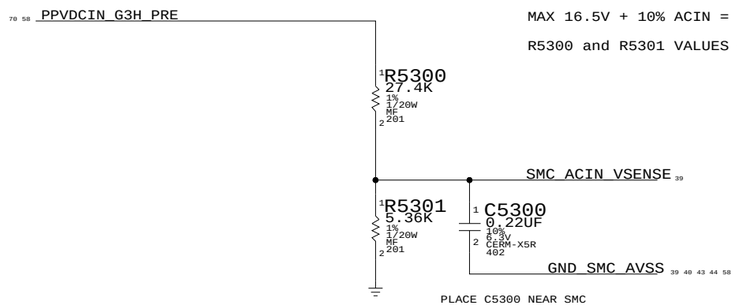

MAX 16.5V + 10% ACIN = 3.0V SMC_ACIN_VSENSE

R5300 and R5301 VALUES CHOSEN FOR RC FILTER @ 4.53KOHM THEVENIN RESISTANCE

PLACE C5300 NEAR SMC

MCP VOLTAGE SENSE

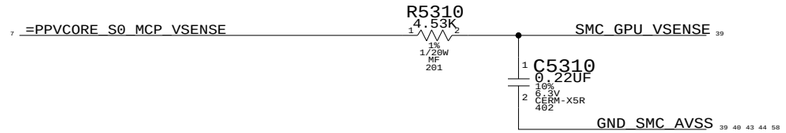

PLACE R5310.C5310 NEAR SMC

PBUS VOLTAGE SENSE

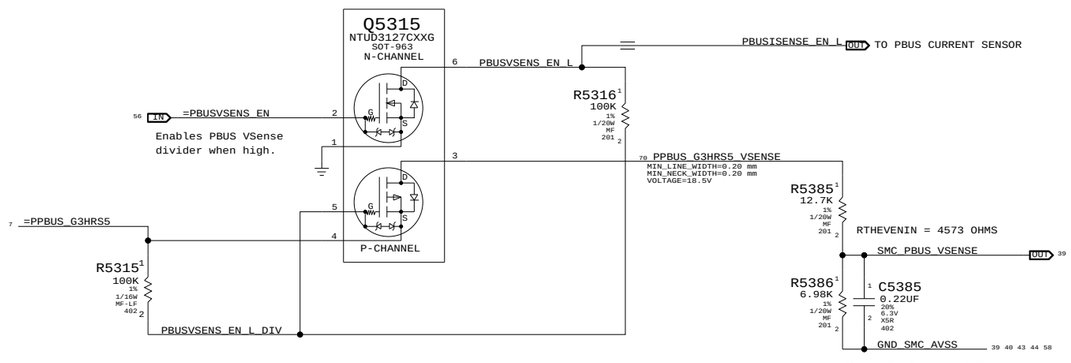

Place RC close to SMC

Voltage Sensors

SYNC_MASTER=M70 SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 43 OF 71	

WWW.AliSaler.Com

MCP VCore Current Sense

MCP VCore Current Sense Filter

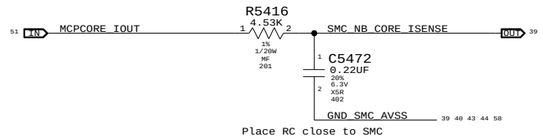

Place RC close to SMC

PBUS Current Sense

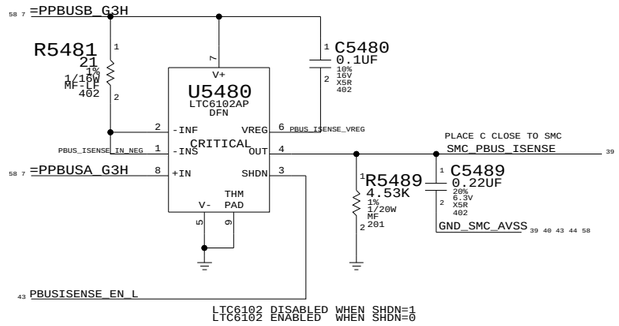

LTC6102 DISABLED WHEN SHDN=1
LTC6102 ENABLED WHEN SHDN=0

Current Sensing

SYNC_MASTER=YUNWU SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 44 OF 71	

WWW.AliSaler.Com

CPU/MCP T-Diode Thermal Sensor

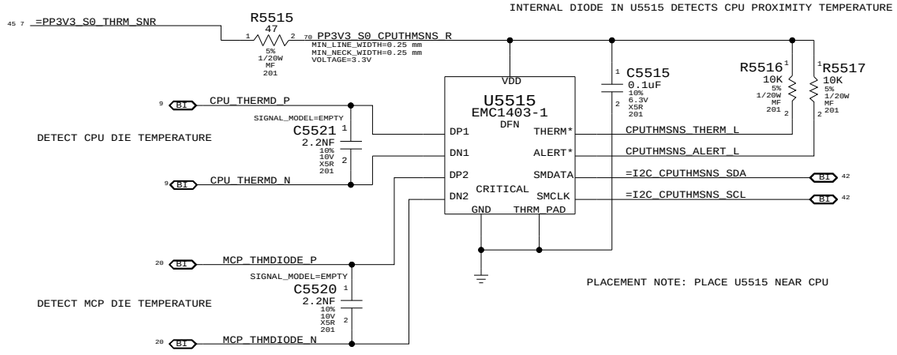

LOCAL TEMP NEAR FRONT EDGE

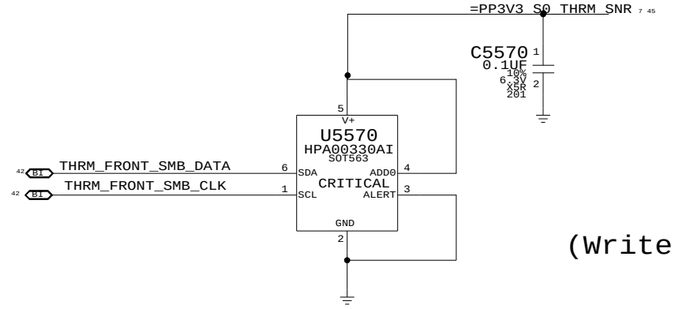

(Write: 0x92 Read: 0x93)

LOCAL TEMP NEAR AIR VENT

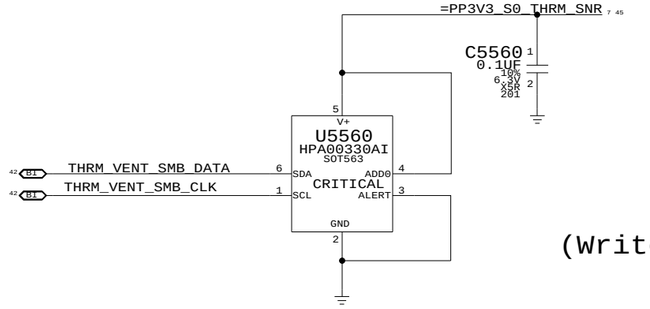

(Write: 0x92 Read: 0x93)

LOCAL TEMP NEAR POWER SUPPLIES

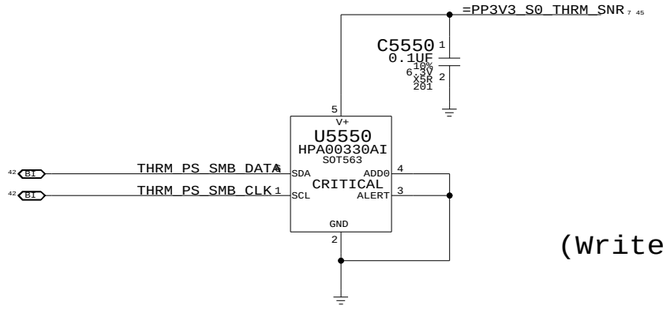

(Write: 0x90 Read: 0x91)

TEMPERATURE SENSORS

SYNC_MASTER=M70 SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	45	71

WWW.AliSaler.Com

FAN CONNECTOR

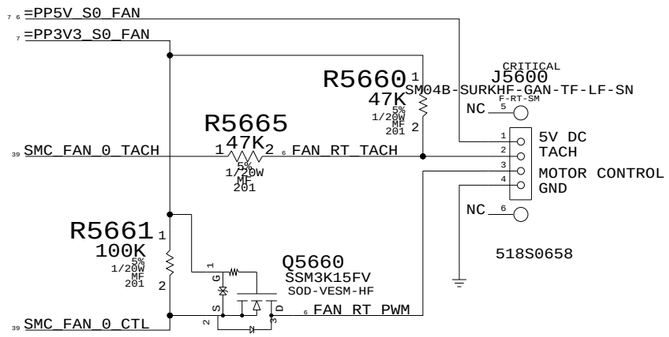

Fan

SYNC_MASTER=M70 SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE

SHT 46 OF 71

WWW.AliSaler.Com

SUDDEN MOTION SENSOR

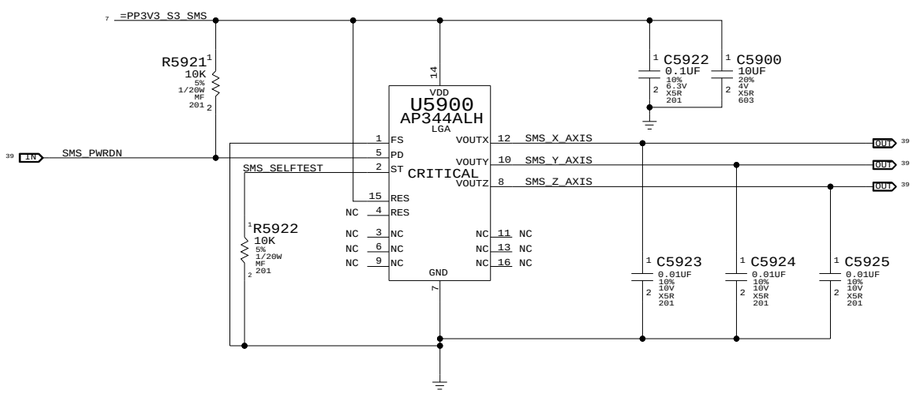

Desired orientation when placed on board top-side:



Circle indicates pin 1 location when placed in correct orientation

Sudden Motion Sensor (SMS)

SYNC_MASTER=M76_MLB SYNC_DATE=01/12/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 47 OF 71	

WWW.AliSaler.Com

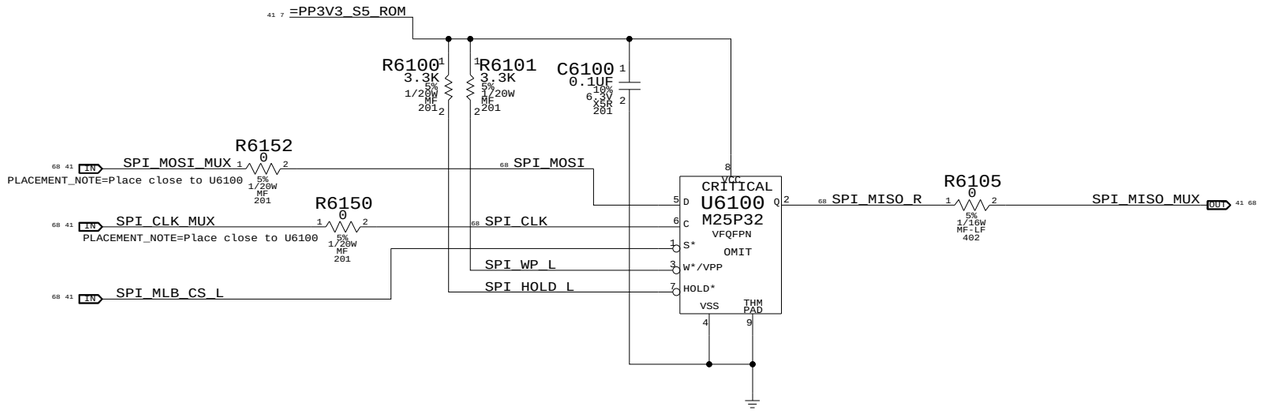

SPI ROM	
SYNC_MASTER=CHANGZHANG	SYNC_DATE=02/15/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 48 OF 71	

WWW.AliSaler.Com

DC-JACK INTERFACE

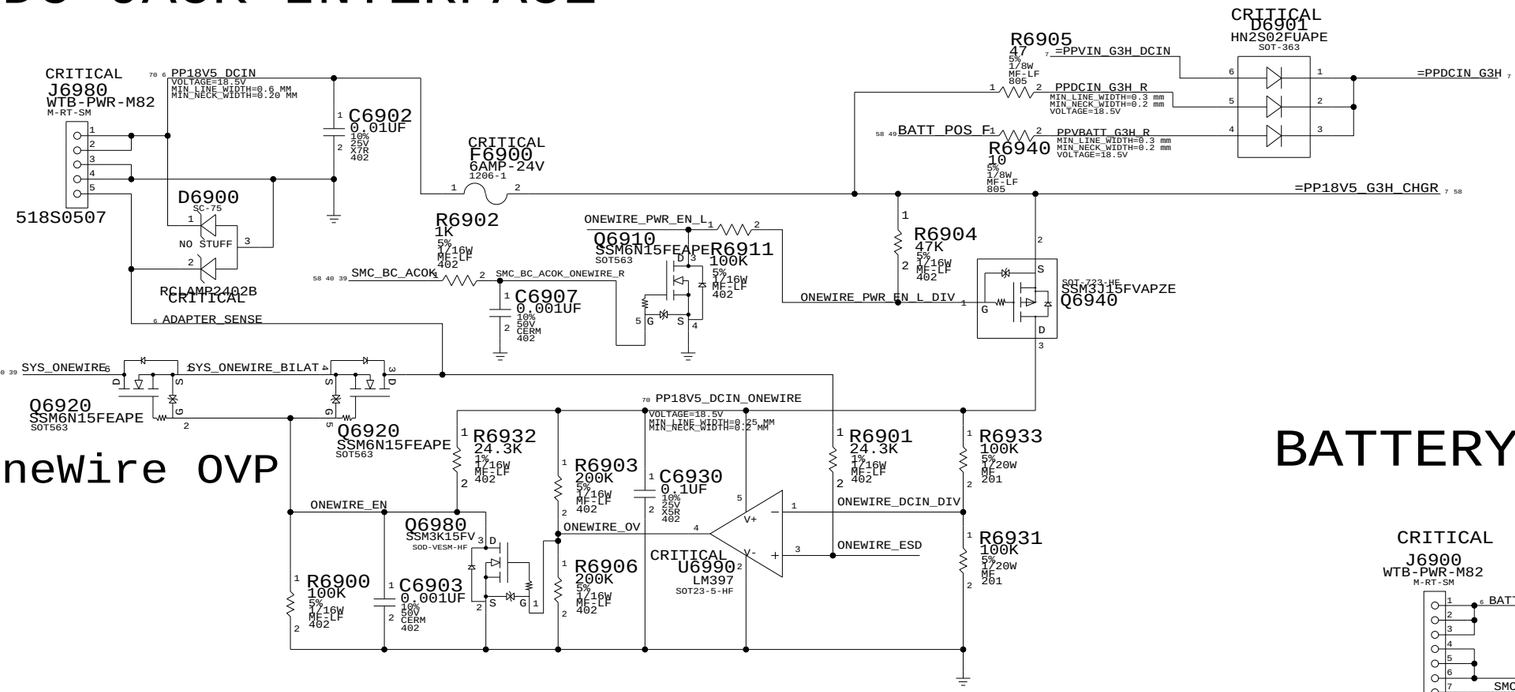

OneWire OVP

BATTERY INTERFACE

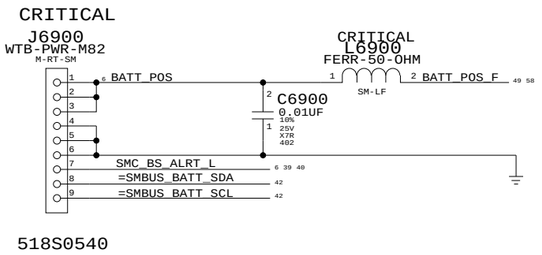

3.425V "G3Hot" Supply

Supply needs to guarantee 3.31V delivered to SMC VRef generator

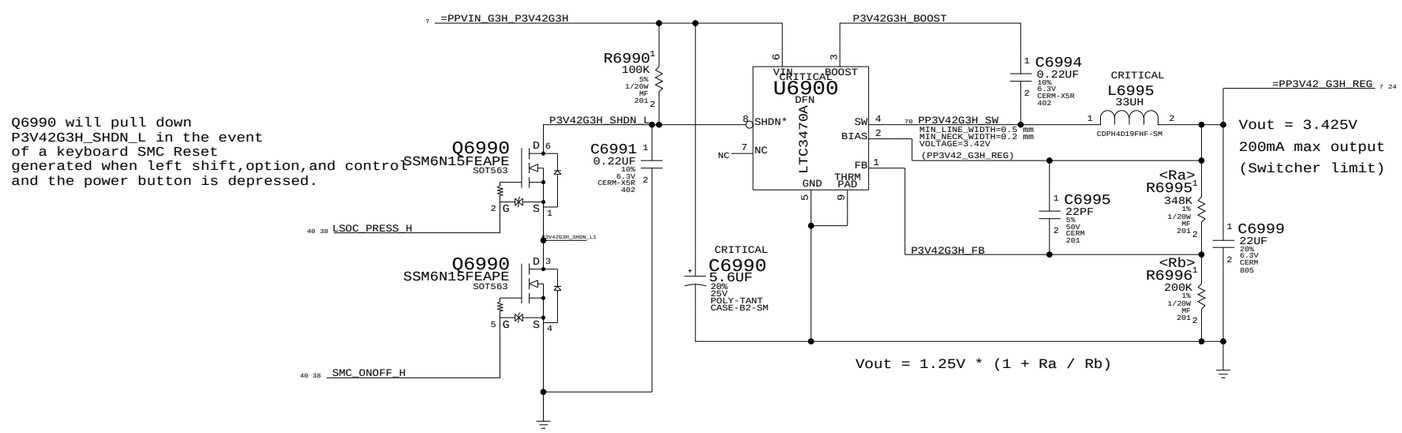

Q6990 will pull down P3V42G3H_SHDN_L in the event of a keyboard SMC Reset generated when left shift,option,and control and the power button is depressed.

Vout = 3.425V
200mA max output
(Switcher limit)

Vout = 1.25V * (1 + Ra / Rb)

DC-In & Battery Connectors		
SYNC_MASTER=M70	SYNC_DATE=01/09/2007	
NOTICE OF PROPRIETARY PROPERTY		
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING I TO MAINTAIN THE DOCUMENT IN CONFIDENCE II NOT TO REPRODUCE OR COPY IT III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART		
APPLE INC.	SIZE: D	DRAWING NUMBER: 051-7631
	REV: 2.3.0	
	SCALE: NONE	SHT: 49 OF 71

WWW.AliSaler.Com

IMVP6 CPU VCORE REGULATOR

=PP5V_S0_CPU_IMVP
R7101 0 5% 1/16W MF-LF 402
OMIT C7101 1UF 10% 6.3V CERM 402
PP5V_S0_IMVP6_VDD MIN_LINE_WIDTH=0.25 MM MIN_NECK_WIDTH=0.2 MM VOLTAGE=5V
IMVP6_PVCC VOLTAGE=5V
R7100 0 5% 1/16W MF-LF 402
OMIT C7100 1UF 10% 6.3V CERM 402

=PPVIN_S5_CPU_IMVP
R7102 0 5% 1/16W MF-LF 402
C7102 0.22UF 10% 16V X7R 603
PPVIN_S5_IMVP6_VIN MIN_LINE_WIDTH=0.25 MM MIN_NECK_WIDTH=0.2 MM VOLTAGE=18.5V

PM_DPRSLPVR

=PP3V3_S0_IMVP
R7103 0 5% 1/20W MF 201
PP3V3_S0_IMVP6_3V3 MIN_LINE_WIDTH=0.25 MM MIN_NECK_WIDTH=0.2 MM VOLTAGE=3.3V
OMIT C7103 1UF 10% 6.3V X5R 402-1

GND_IMVP6_SGND

PLACE R7110 WITH NO STUB ON PM_DPRSLPVR

U7100 ISL6261A QFN

CPU_VID<6>	34	VID6	
CPU_VID<5>	33	VID5	
CPU_VID<4>	32	VID4	
CPU_VID<3>	31	VID3	
CPU_VID<2>	30	VID2	
CPU_VID<1>	29	VID1	
CPU_VID<0>	28	VID0	
CPU_DPRSTP_L	37	DPRSTP*	
IMVP_DPRSLPVR	36	DPRSLPVR	
	1	FDE	
	39	3V3	
	NC 38	CLK_EN*	
IMVP_VR_ON	35	VR_ON	
VR_PWRGOOD_DELAY	40	PGOOD	
IMVP6_VR_TT	4	VR_TT*	
	NC 5	NTC	
IMVP6_SOFT	6	SOFT	
IMVP6_RBIAS	3	RBIAS	
IMVP6_VDIFF	11	VDIFF	
IMVP6_FB	10	FB	
IMVP6_COMP	9	COMP	
IMVP6_VW	8	VW	
	21	NC	
	19	VSS	
	41	TPAD	

VIN 18, VDD 20, VCCP 27 (CRITICAL)

IMVP6_BOOT	22	BOOT	
IMVP6_LGATE	26	LGATE	
	25	VSSP (GND)	
IMVP6_UGATE	23	UGATE	
IMVP6_PHASE	24	PHASE	
IMVP6_CPU_ISENSE	2	PMON	
IMVP6_VSUM	17	VSUM	
IMVP6_OCSET	7	OCSET	
IMVP6_VO	16	VO	
IMVP6_DROOP	14	DROOP	
IMVP6_DFB	15	DFB	
	12	VSEN	
	13	RTN	

R7104 2.2 5% 1/16W MF-LF 402
C7104 0.22UF 10% 16V X7R 603
R7190 4.53K 1% 1/20W MF 201
C7190 0.22UF 10% 6.3V X5R 201
SMC_CPU_ISENSE 39
R7141 8.66K 1/20W MF 201 1%
C7140 330PF 10% 16V X7R 201
NO STUFF C7141 1000PF 10% 16V X7R 201
R7140 806 1% 1/20W MF 201
R7142 20K 1% 1/20W MF 201
C7130 1000PF 10% 16V X7R 201
IMVP6_VSEN_N
IMVP6_VSEN_P
(IMVP6_VO)
R7143 3.57K 1% 1/20W MF 201
IMVP6_VO_R
C7142 0.12UF 10% 10.0V CERM-X5R 402
C7143 0.01UF 10% 16V X5R 201
R7145 4.53K 1% 1/20W MF 201
CRITICAL R7144 10KOHM-5% 0603-LF ERT-J1VR103J
C7131 1000PF 10% 16V X7R 201
R7130 100 1% 1/20W MF 201
C7132 330PF 10% 16V X7R 201
R7131 0 5% 1/20W MF 201
R7132 0 5% 1/20W MF 201
C7133 0.1UF 10% 6.3V X5R 201
OMIT XW7100 SM
R7134 100 1% 1/20W MF 201
CPU_VCCSENSE_P 10 65
CPU_VCCSENSE_N 10 65

=PPVIN_S5_CPU_IMVP
CRITICAL C7150 47UF 20% 10V POLY-TANT CASE-B2-SM
CRITICAL C7151 47UF 20% 10V POLY-TANT CASE-B2-SM
C7152 1UF 10% 25V X5R 603-1
C7153 1UF 10% 25V X5R 603-1

CRITICAL Q7100 RJK0305DPB LFPAK-HF
CRITICAL Q7151 RJK0328DPB LFPAK-HF
(IMVP6_PHASE)

CRITICAL L7100 0.36UH-30A-1.05M-OHM PCMB103T
=PPVCORE_S0_CPU_REG

PWM FREQ. = 300kHz
MAX CURRENT = 30A

R7146 7.68K 1% 1/16W MF-LF 402
(IMVP6_VSUM)
(IMVP6_VO)

R1100/R1101 **ON THE CPU PAGE** PROTECT THE IMVP6 IF THE CPU IS NOT INSTALLED

R7115 NO STUFF 0 5% 1/20W MF 201
CPU_PROCHOT_L
C7111 0.015uF 10% 16V X7R 402
R7116 147K 1% 1/20W MF 201
FROM SMC IMVP_VR_ON
VR_PWRGOOD_DELAY
IMVP6_VR_TT

IMVP6_SOFT
IMVP6_RBIAS
IMVP6_VDIFF
IMVP6_FB
IMVP6_COMP
IMVP6_VW

C7120 180PF 5% 50V CERM 402
IMVP6_VDIFF_RC
R7120 2.21K 1% 1/20W MF 201
R7122 15K 1% 1/20W MF 201
(IMVP6_FB)
R7121 374K 1% 1/20W MF 201
IMVP6_FB_RC
C7122 56PF 5% 25V NP0-C0G 201
C7121 270PF 10% 50V X7R-CERM 402
(IMVP6_VW)
C7123 1000PF 10% 16V X7R 201
R7123 6.04K 1% 1/20W MF 201
R7124 1K 1% 1/20W MF 201
IMVP6_COMP_R
C7124 0.01UF 10% 16V X5R 201
GND_IMVP6_SGND VOLTAGE=0 V

NOTE 1: C7132,C7133 = 27.4 OHM FOR VALIDATING CPU ONLY.

	MIN_LINE_WIDTH	MIN_NECK_WIDTH
IMVP6_PHASE	1.5 MM	0.20 MM
IMVP6_BOOT	0.25 MM	0.20 MM
IMVP6_UGATE	1.5 MM	0.20 MM
IMVP6_LGATE	1.5 MM	0.20 MM

	MIN_LINE_WIDTH	MIN_NECK_WIDTH
IMVP6_OCSET	0.25 MM	0.20 MM
IMVP6_VSUM	0.25 MM	0.20 MM
GND_IMVP6_SGND	0.50 MM	0.20 MM
IMVP6_VO	0.25 MM	0.20 MM
IMVP6_DROOP	0.25 MM	0.20 MM
IMVP6_DFB	0.25 MM	0.20 MM
IMVP6_SOFT	0.25 MM	0.20 MM
IMVP6_RBIAS	0.25 MM	0.20 MM
IMVP6_VDIFF	0.25 MM	0.20 MM
IMVP6_FB	0.25 MM	0.20 MM
IMVP6_COMP	0.25 MM	0.20 MM
IMVP6_VW	0.25 MM	0.20 MM
IMVP6_PVCC	0.25 MM	0.20 MM
IMVP6_COMP_R	0.25 MM	0.20 MM
IMVP6_FB_RC	0.25 MM	0.20 MM
IMVP6_VDIFF_RC	0.25 MM	0.20 MM

IMVP6 CPU VCore Regulator

SYNC_MASTER=POWER SYNC_DATE=07/13/2005

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 50 OF 71	

WWW.AliSaler.Com

MCP CORE POWER SUPPLY

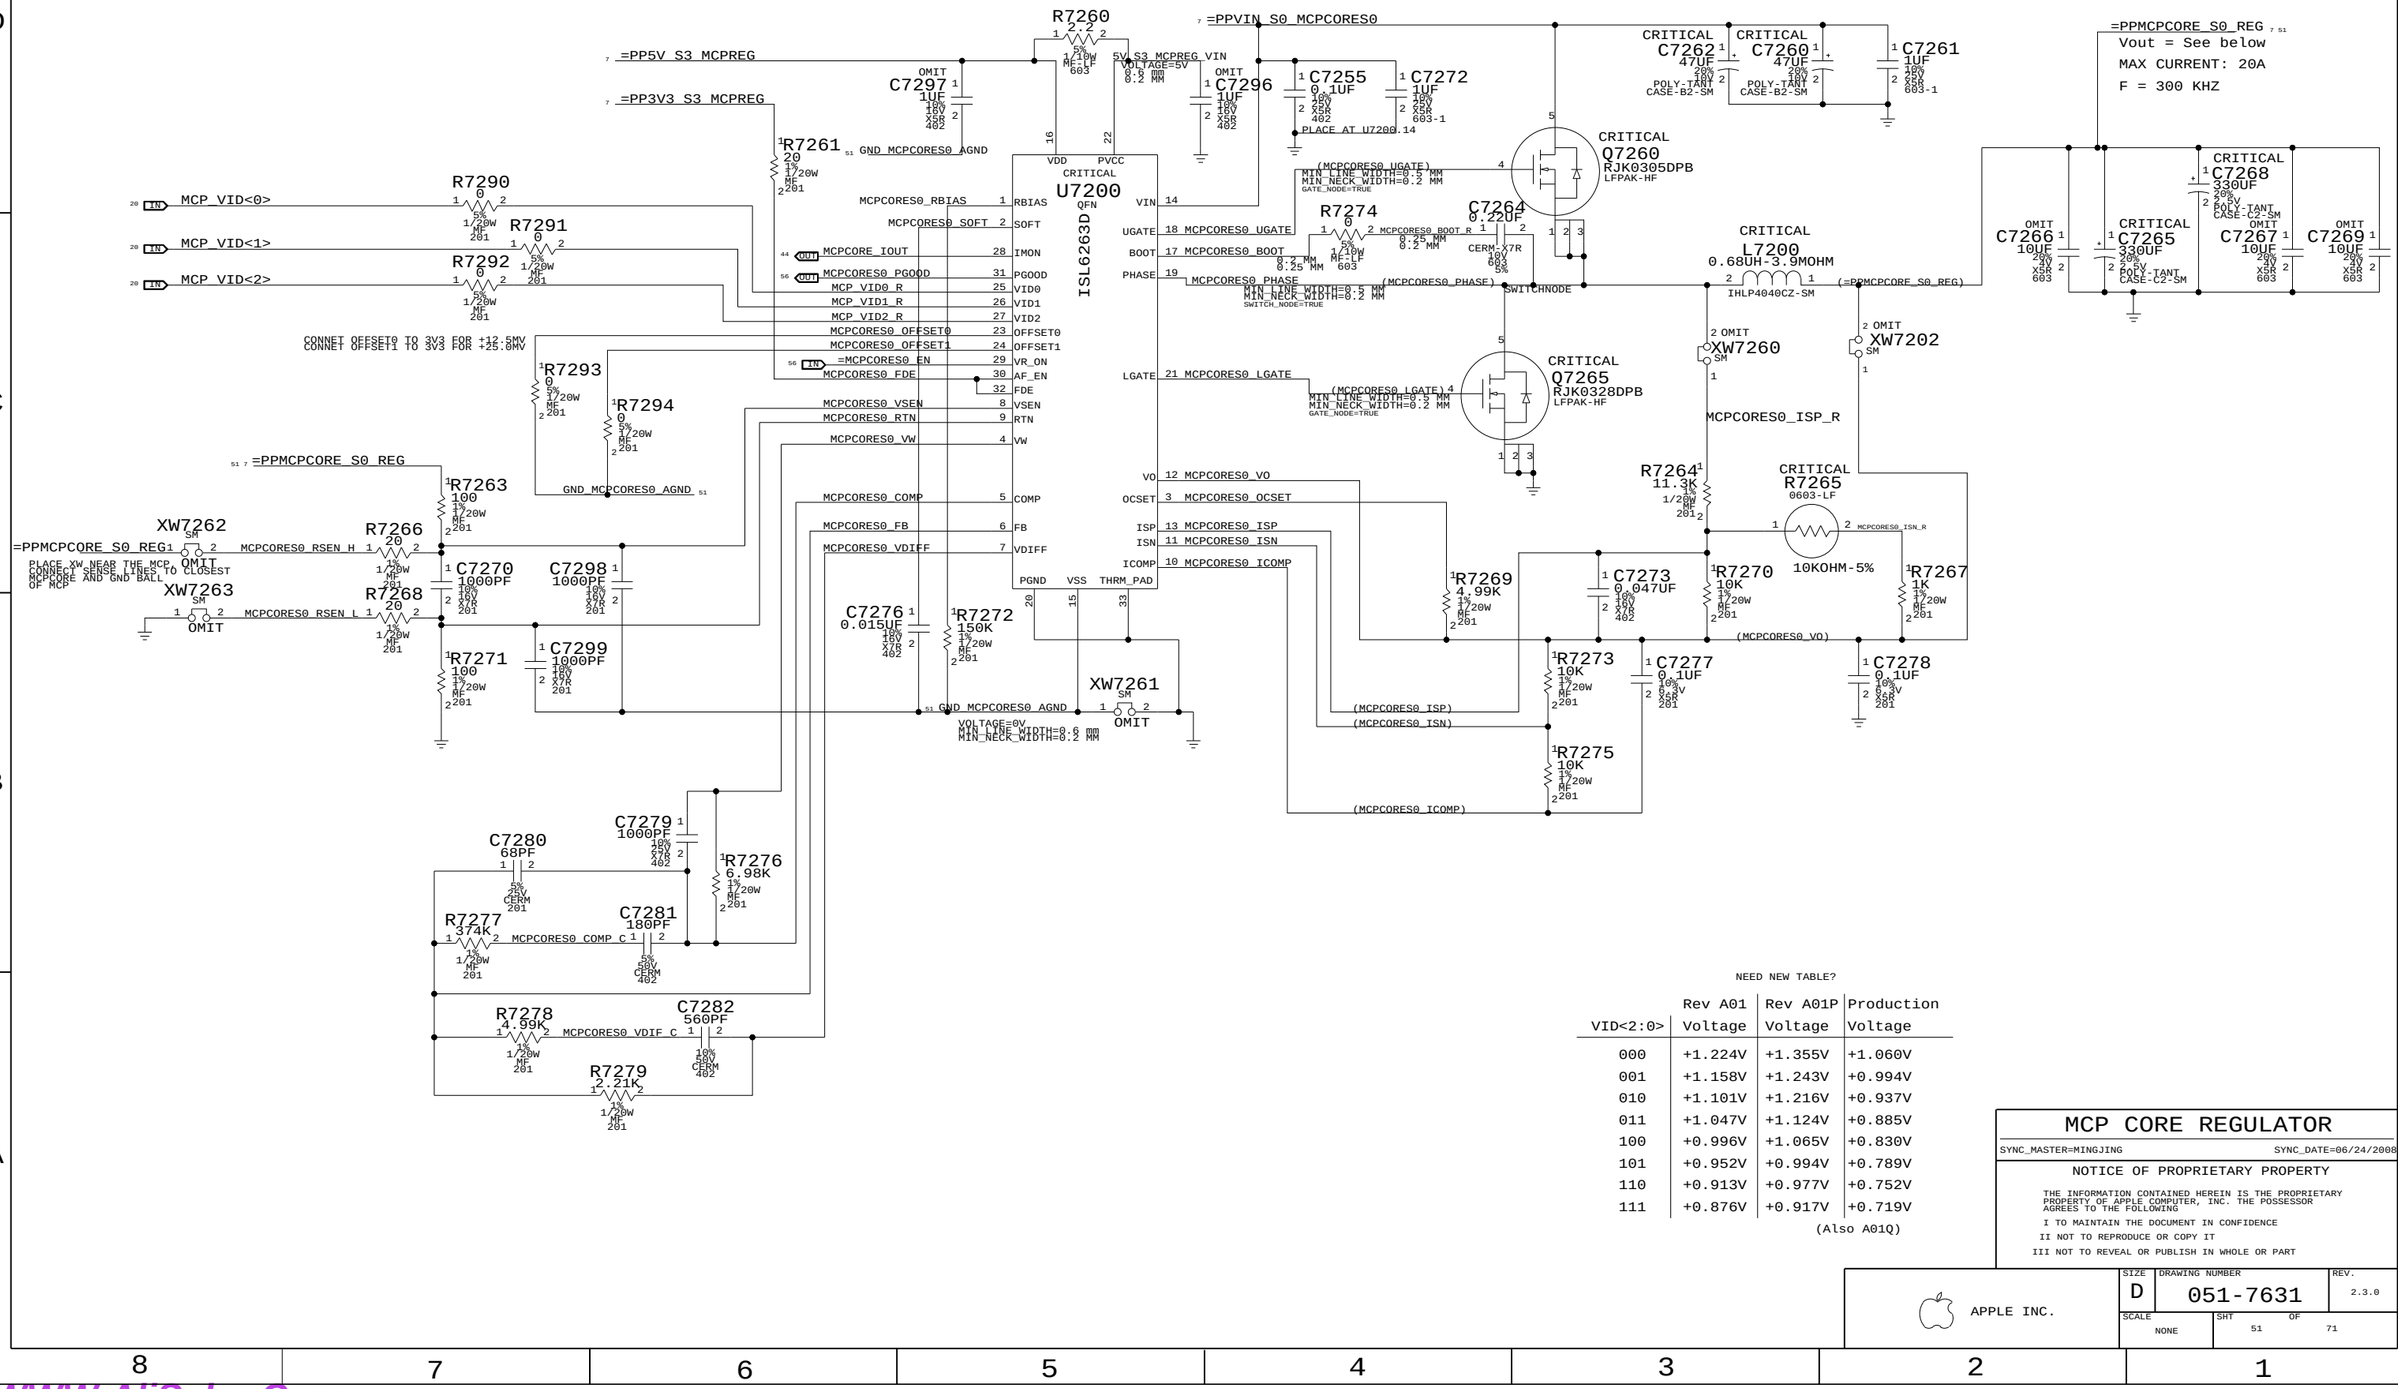

NEED NEW TABLE?

VID<2:0>	Rev A01 Voltage	Rev A01P Voltage	Production Voltage
000	+1.224V	+1.355V	+1.060V
001	+1.158V	+1.243V	+0.994V
010	+1.101V	+1.216V	+0.937V
011	+1.047V	+1.124V	+0.885V
100	+0.996V	+1.065V	+0.830V
101	+0.952V	+0.994V	+0.789V
110	+0.913V	+0.977V	+0.752V
111	+0.876V	+0.917V	+0.719V

(Also A01Q)

MCP CORE REGULATOR

SYNC_MASTER=MINGJING SYNC_DATE=06/24/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 51 OF 71

WWW.AliSaler.Com

1.8V S0 LDO

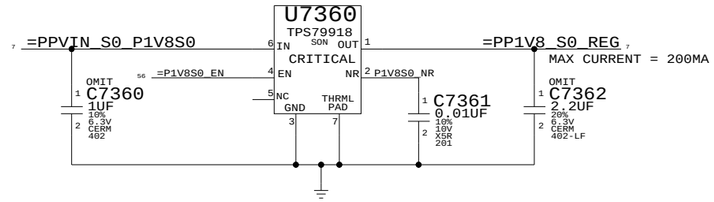

1.8V LDO Supply

SYNC_MASTER= SYNC_DATE=

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 52 OF 71	

WWW.AliSaler.Com

1V05 S5 POWER SUPPLY

supply for MCP1V05 AUX, FSB (CPU & MCP) VTT, 1V05 S0

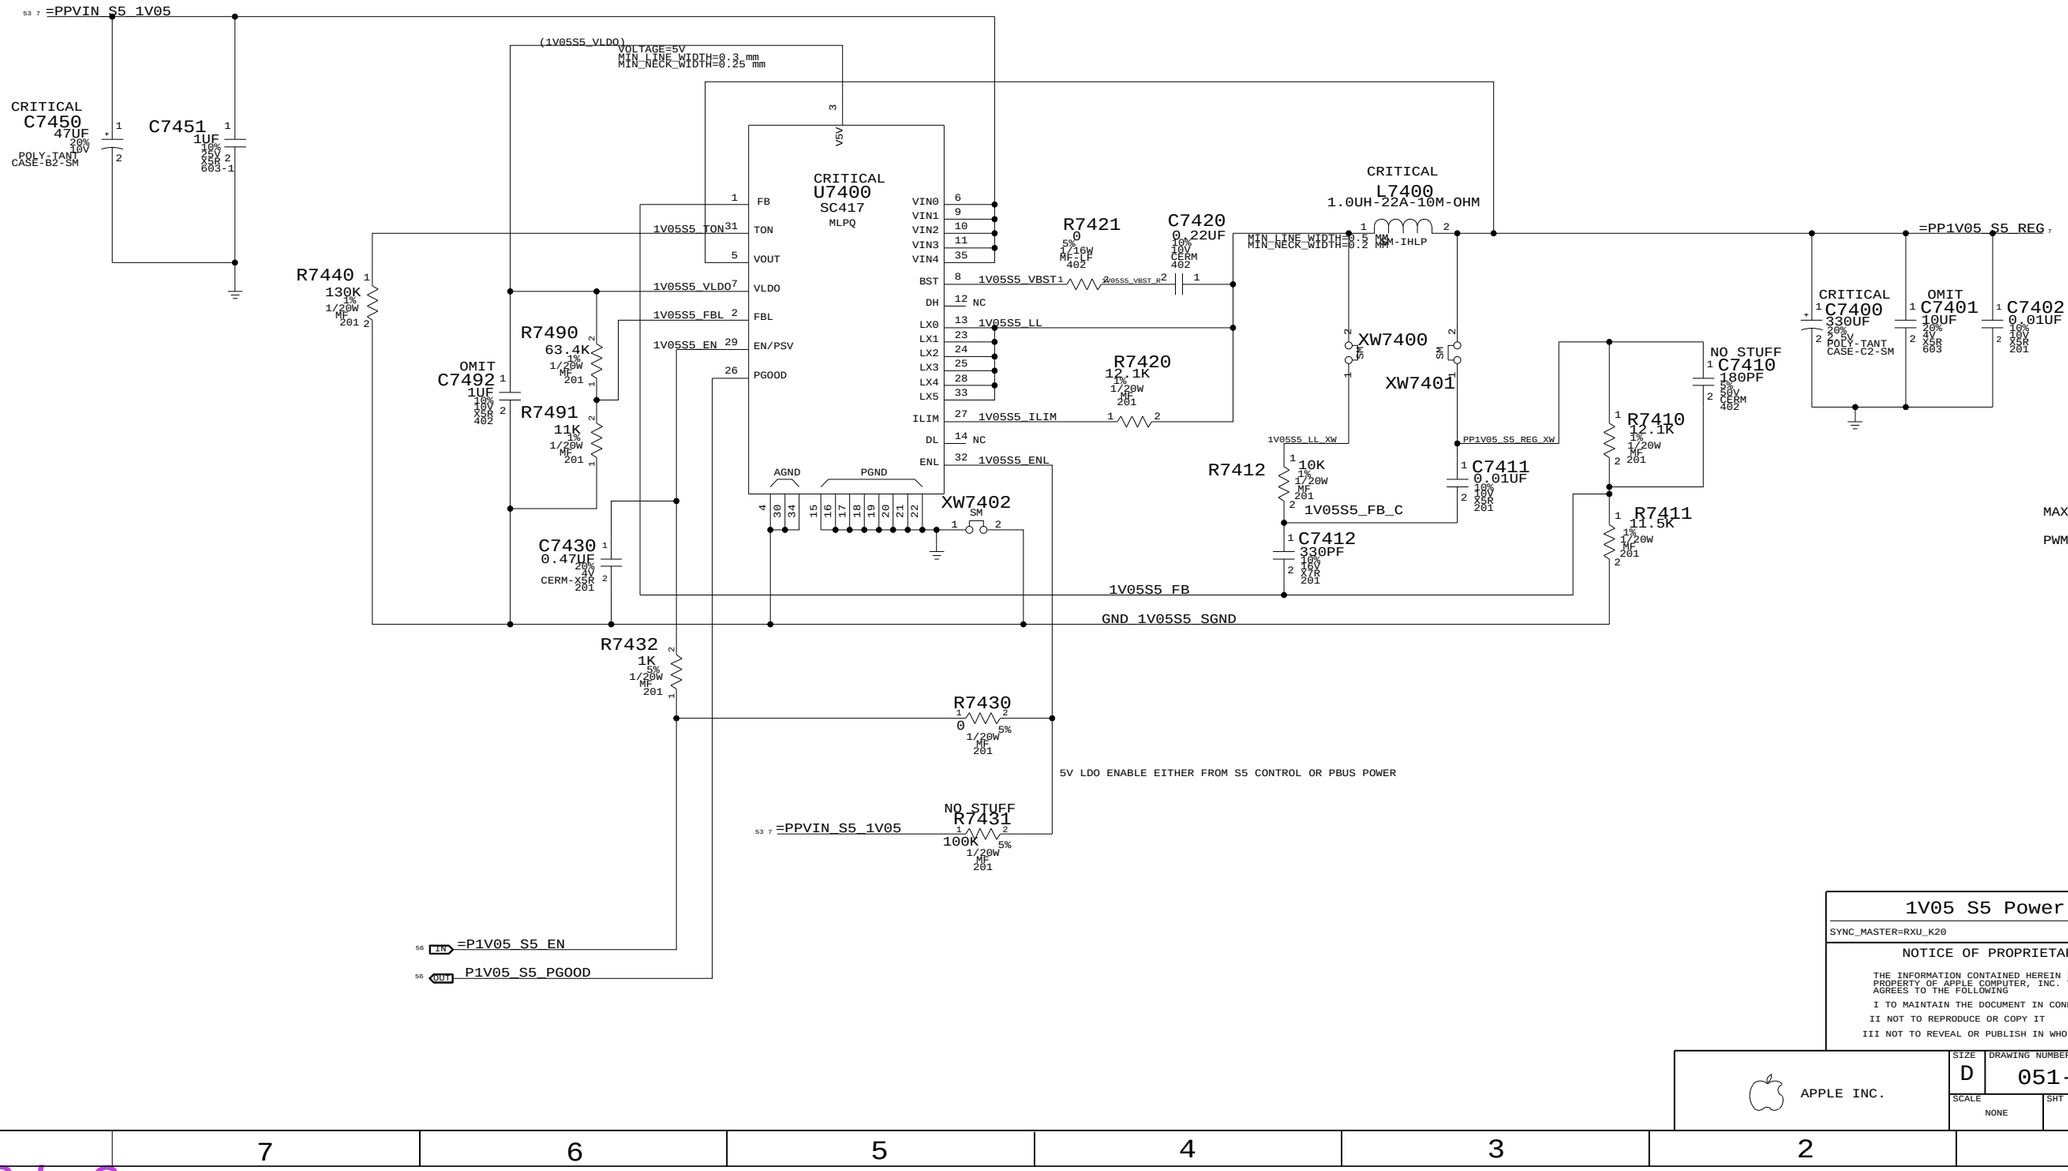

1V05 S5 Power Supply

SYNC_MASTER=RXU_K20 SYNC_DATE=05/21/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 53 OF 71	

WWW.AliSaler.Com

1.5V/0.75V POWER SUPPLY

State	PM_S4_STATE_L	PM_SLP_S3_L	PP1V5_S3	PP0V75_S0
S0	HIGH	HIGH	1.5V	0.75V
S3	HIGH	LOW	1.5V	0.0V
S5/G3Hot	LOW	LOW	0.0V	0.0V

Vout = 0.75V * (1 + Ra / Rb)

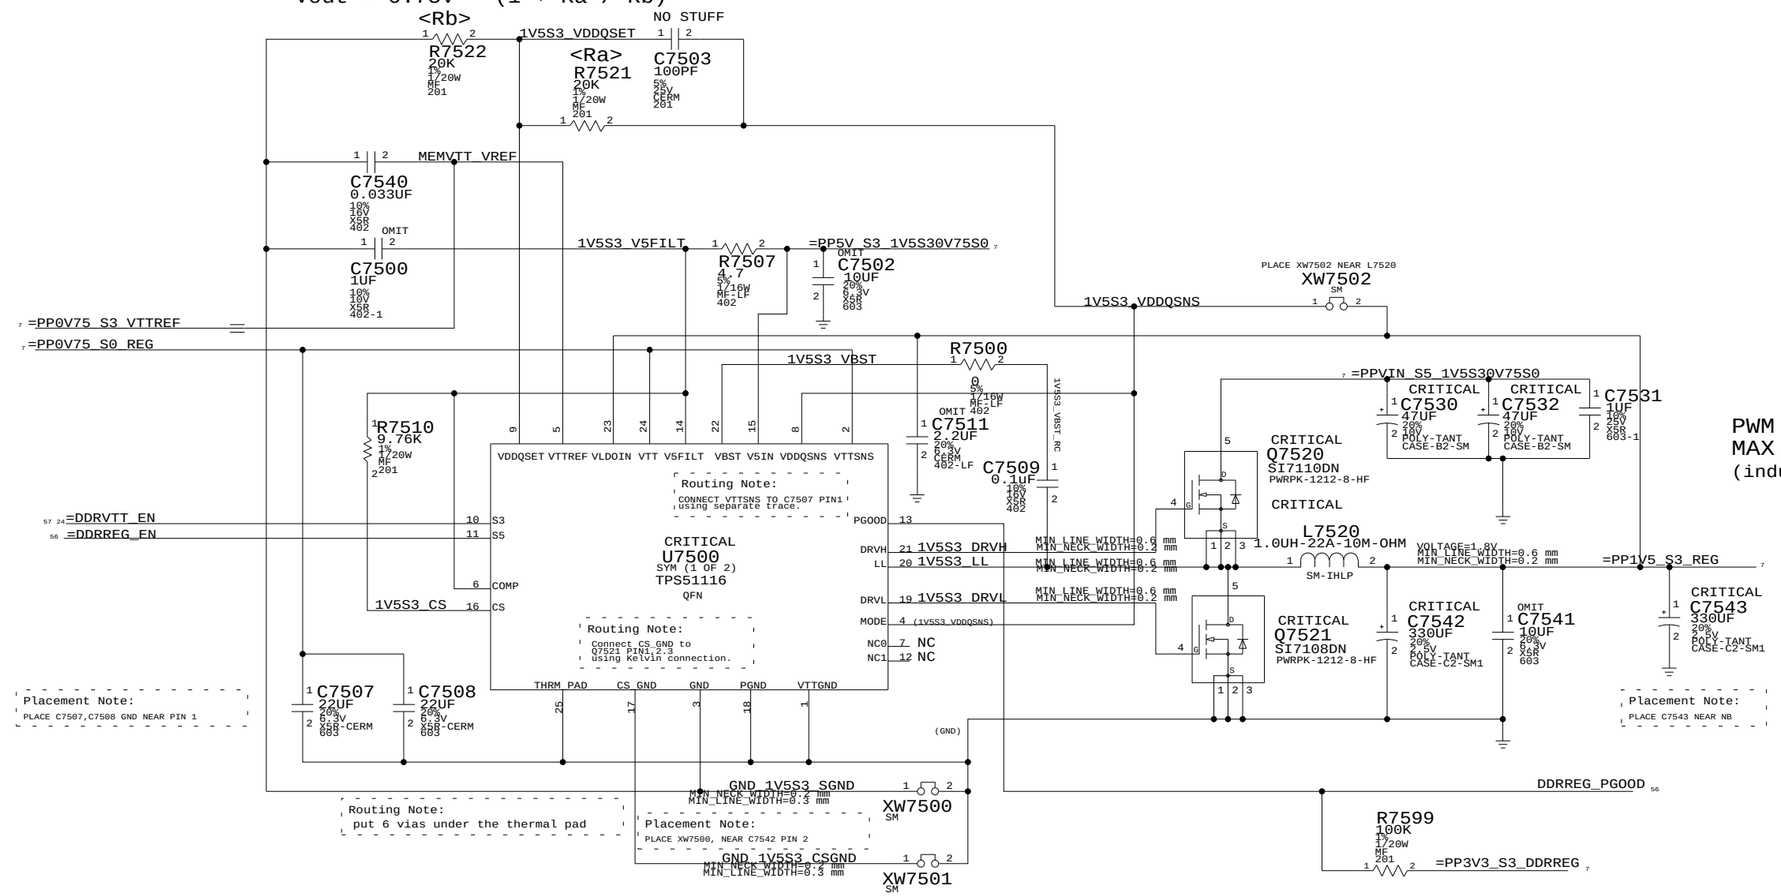

1.5V/0.75V Supplies	
SYNC_MASTER=M70	SYNC_DATE=01/09/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 54 OF 71	

WWW.AliSaler.Com

5V_S3 / 3V3_S5 POWER SUPPLY

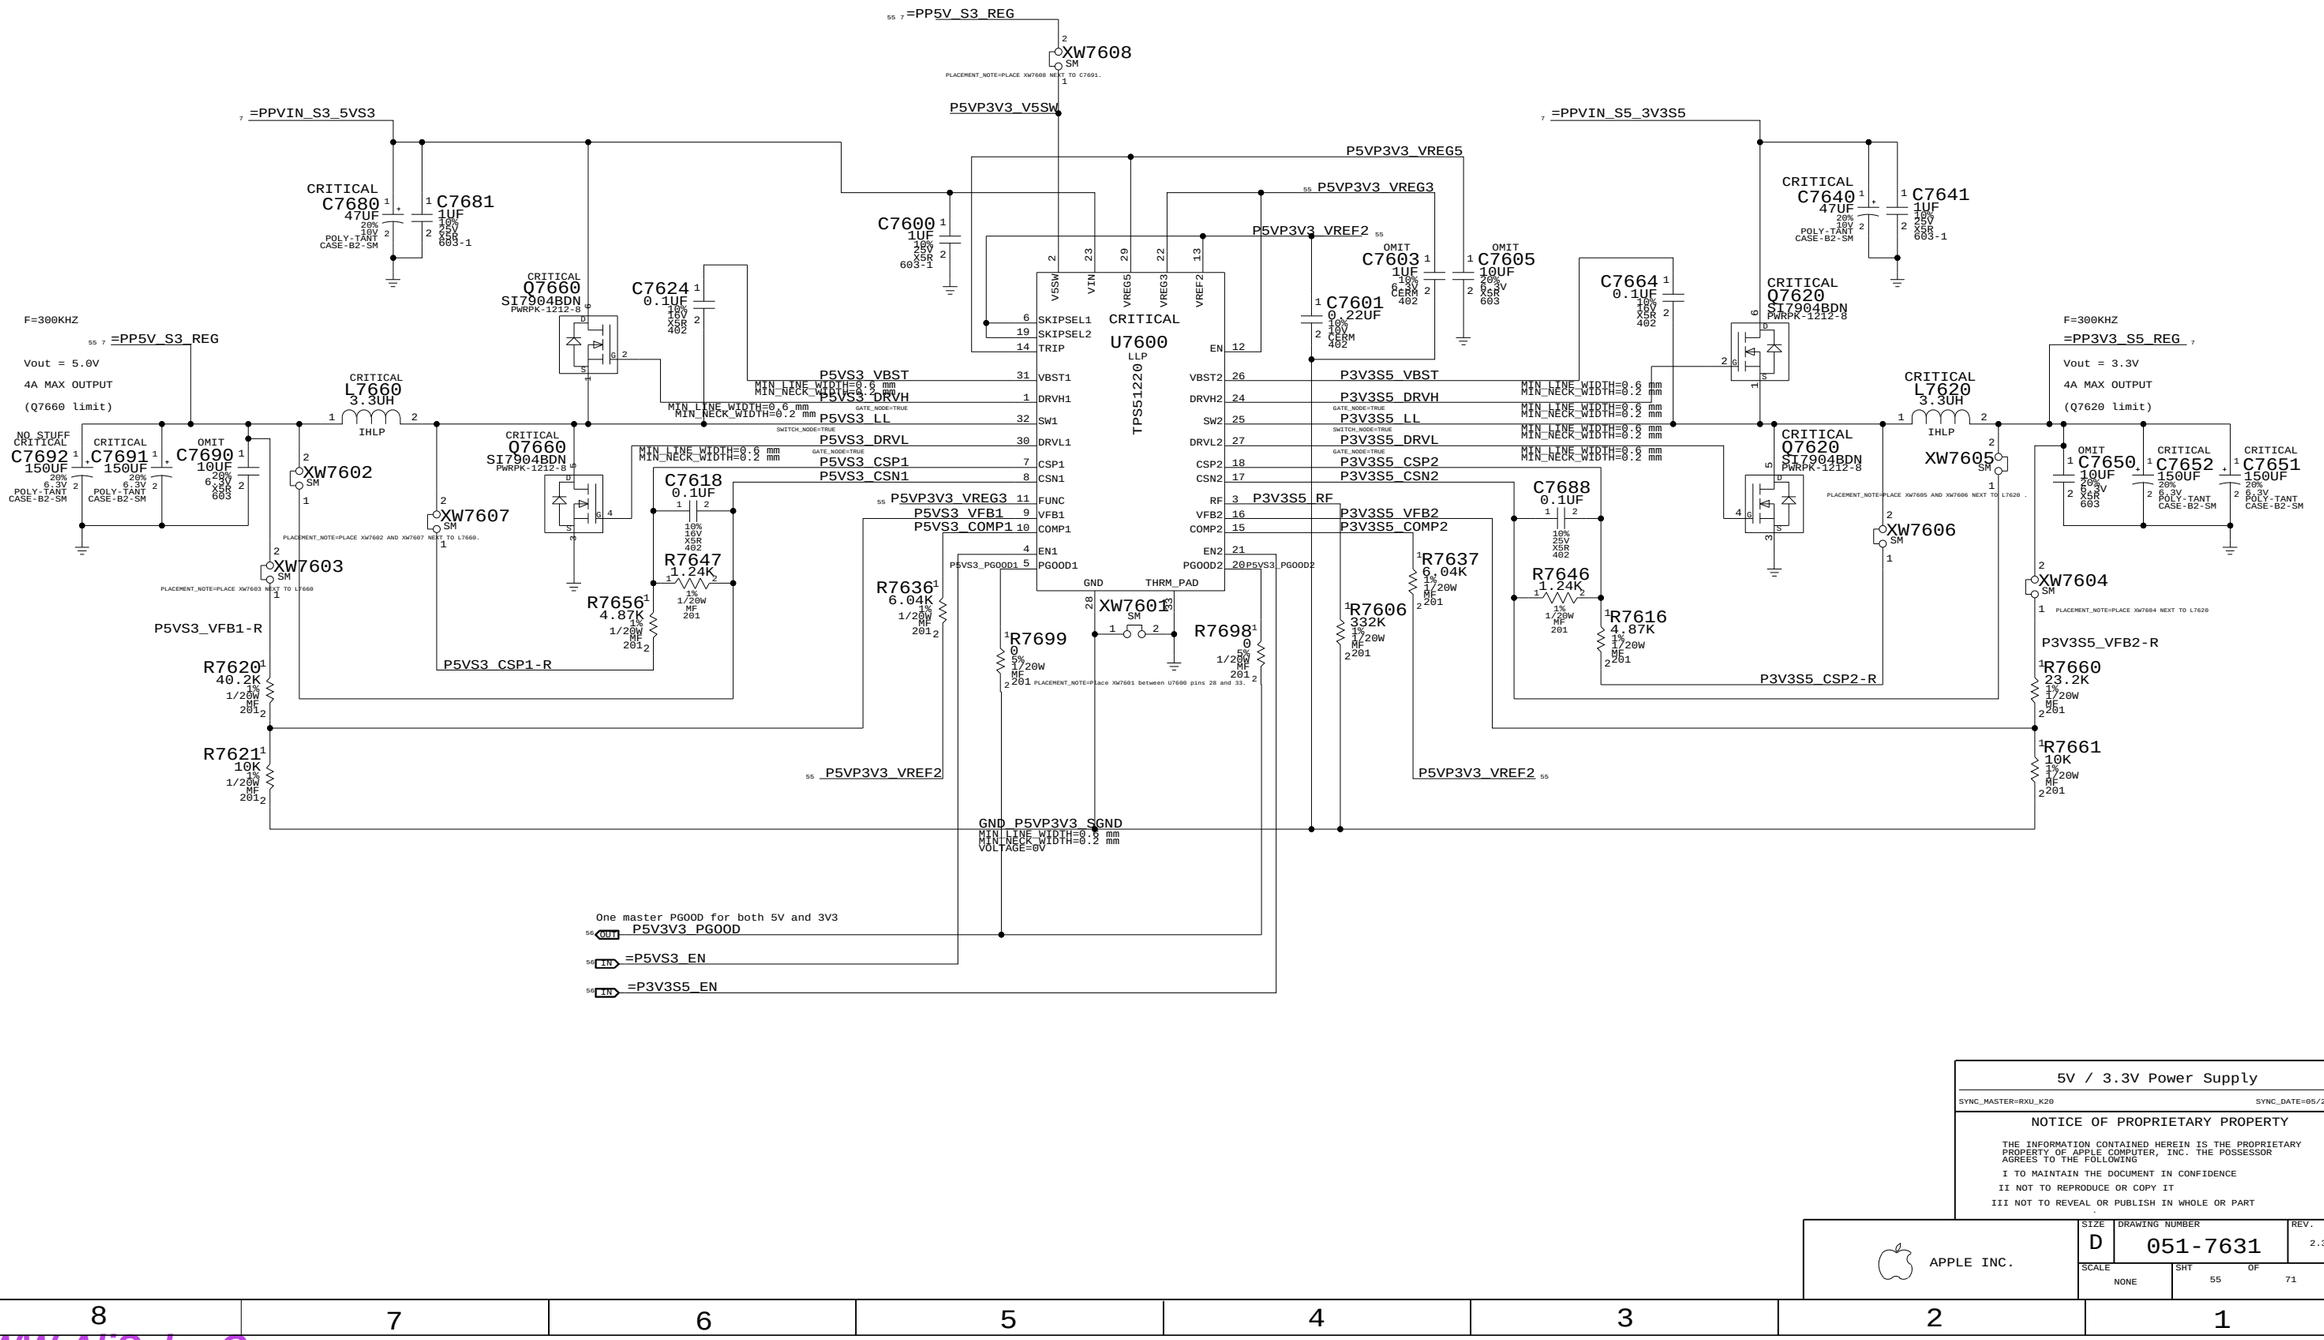

5V / 3.3V Power Supply	
SYNC_MASTER=RXU_K20	SYNC_DATE=05/21/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 55 OF 71	

WWW.AliSaler.Com

Power Control Signals

S5 ENABLE

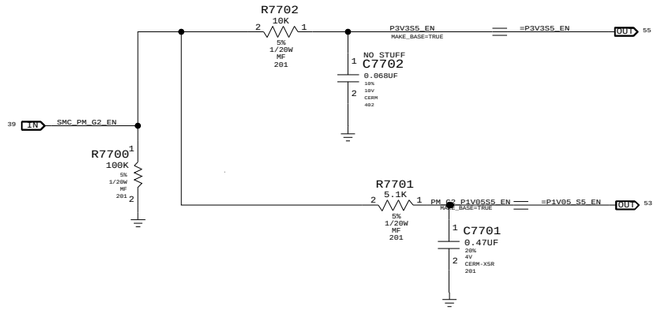

S3 ENABLE

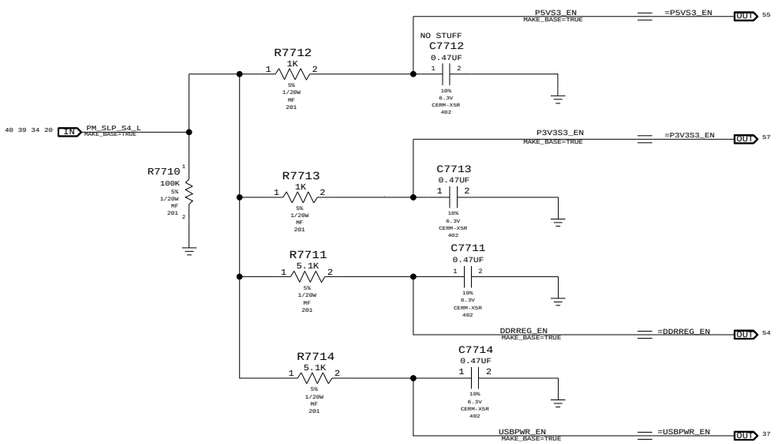

S0 ENABLE

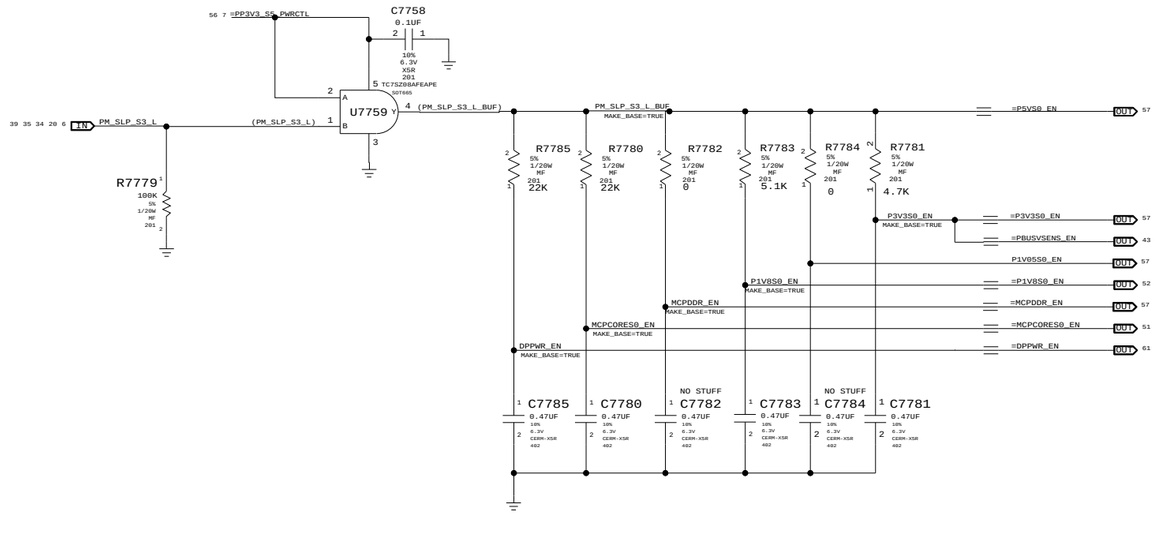

3.3V 1.05V AND 1.5V S0 RAILS MONITOR CIRCUIT

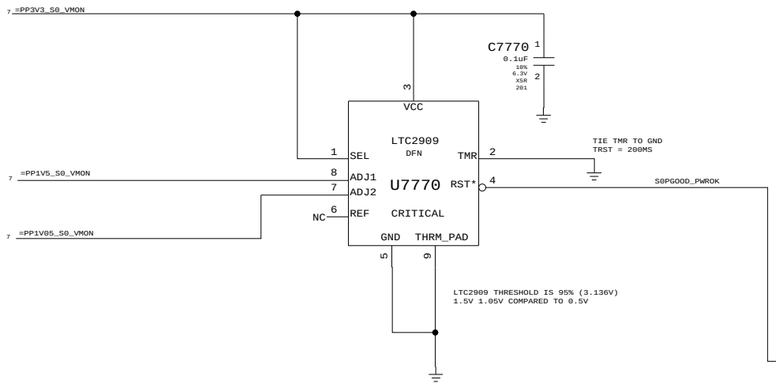

OTHER S0 RAILS PGOOD

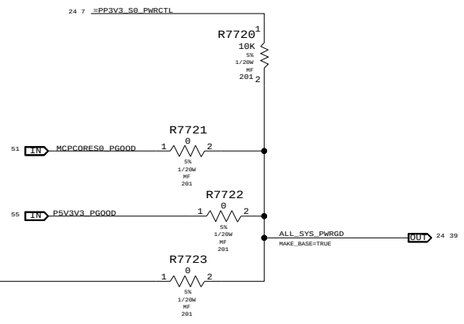

Unused PGOOD signal



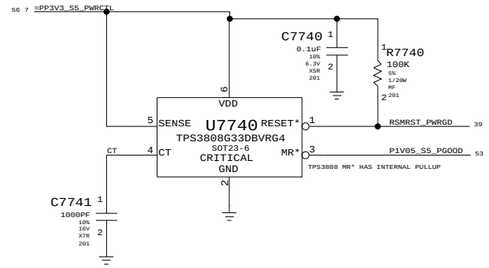

POWER SEQUENCING

SYNC_MASTER=YUAN.MA SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 56 OF 71	

WWW.AliSaler.Com

3.3V S3 FET

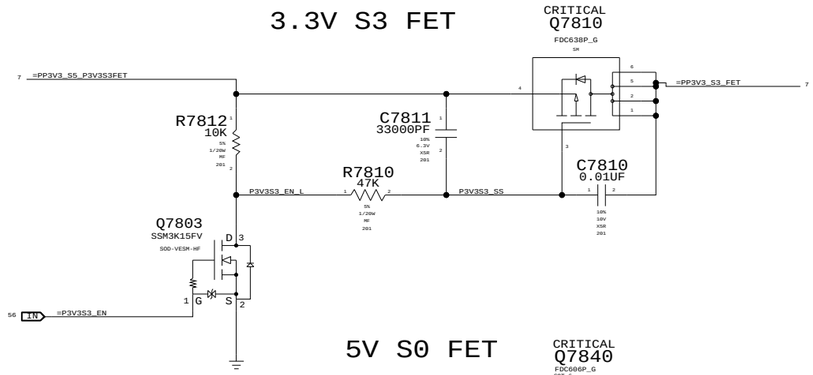

3.3V S3 FET	
MOSFET	FDC638P
CHANNEL	P-TYPE
RDS(ON)	48 mOhm @4.5V
LOADING	0.315 A (EDP)

5V S0 FET

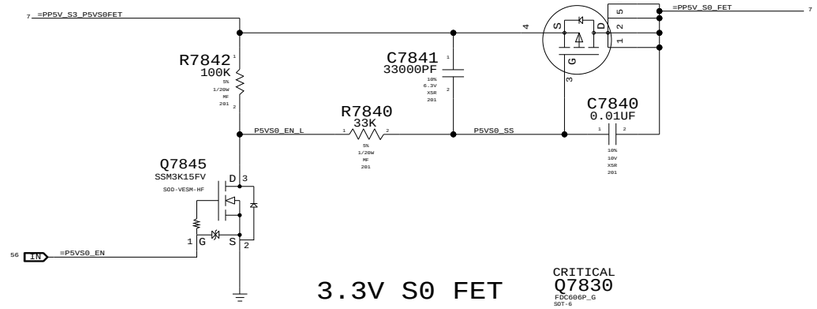

5V S0 FET	
MOSFET	FDC606P
CHANNEL	P-TYPE
RDS(ON)	26 MOHM @4.5V
LOADING	0.562 A (EDP)

3.3V S0 FET

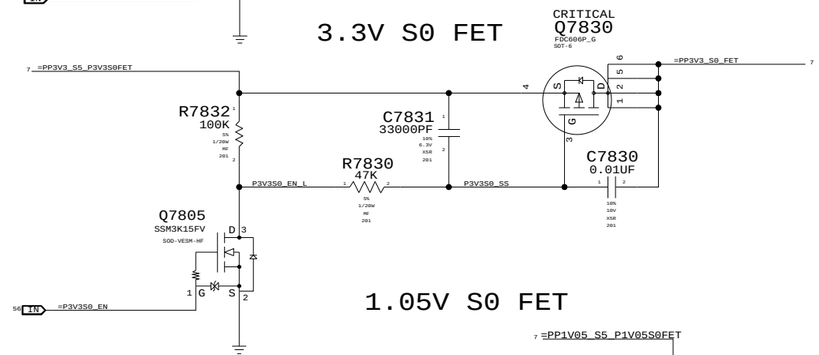

3.3V S0 FET	
MOSFET	FDC606P
CHANNEL	P-TYPE
RDS(ON)	26 MOHM @4.5V
LOADING	2.046 A (EDP)

1.05V S0 FET

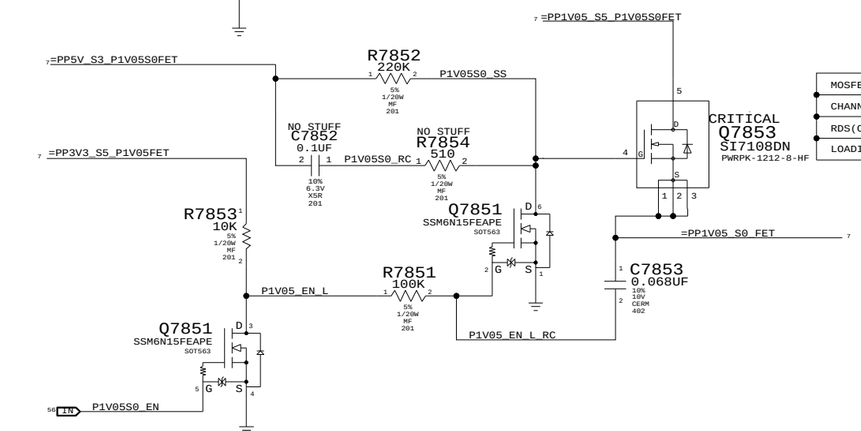

1.05V S0 FET	
MOSFET	SI7108DN
CHANNEL	N-TYPE
RDS(ON)	6.1 MOHM @4.5V VGS
LOADING	8.25A (EDP)

1.5V S0 FET

(1.5V S0 FET FOR DDR3 MEM, MCP79 AND CPU)

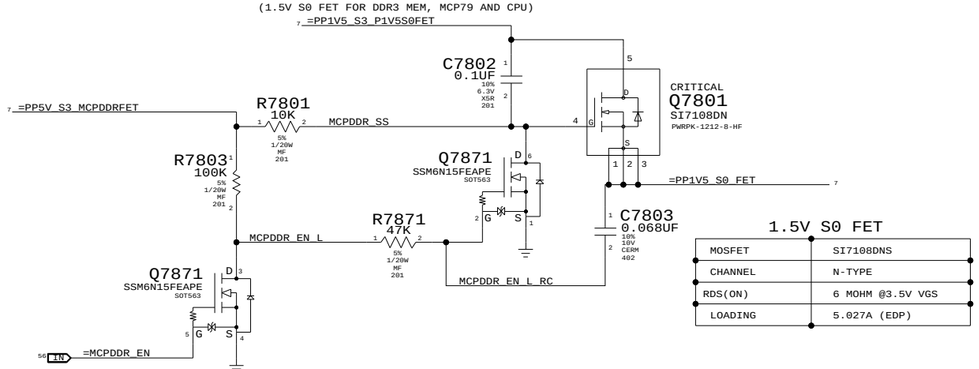

1.5V S0 FET	
MOSFET	SI7108DNS
CHANNEL	N-TYPE
RDS(ON)	6 MOHM @3.5V VGS
LOADING	5.027A (EDP)

3.3V RMGT FET

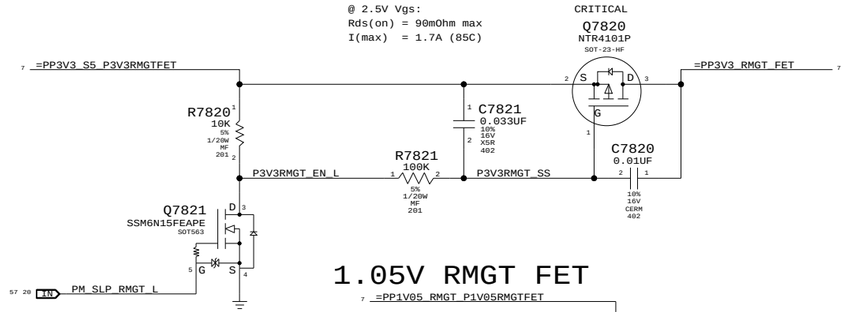

1.05V RMGT FET

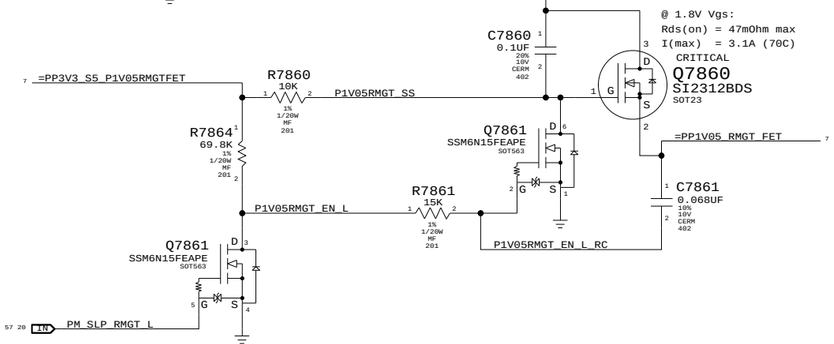

MCP79 DDRVTT FET

MCP79 DDR PAD LEAKAGE IS HIGH ENOUGH THAT
NVIDIA RECOMMENDS UNPOWERING DURING SLEEP.
IN ORDER TO SUPPORT UNPOWERING RAIL, HARDWARE
MUST GUARANTEE MEM_CKE SIGNALS ARE LOW
BEFORE RAIL IS TURNED OFF, AND REMAINS LOW
UNTIL AFTER RAIL TURNS BACK ON OR DIMMS
WILL EXIT SELF-REFRESH PREMATURELY.
MEM_VTT_EN OUTPUT FROM MCP79 USED TO ENABLE CLAMP
ON VTT RAIL, WHICH PULLS ALL CKE SIGNALS
LOW THROUGH VTT TERMINATION RESISTORS.

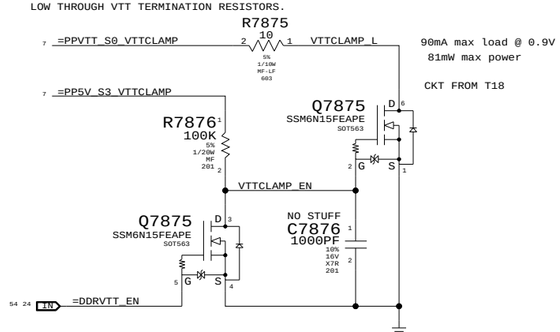

POWER FETS

SYNC_MASTER=YUAN.MA SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 57 OF 71	

WWW.AliSaler.Com

PBUS SUPPLY / BATTERY CHARGER

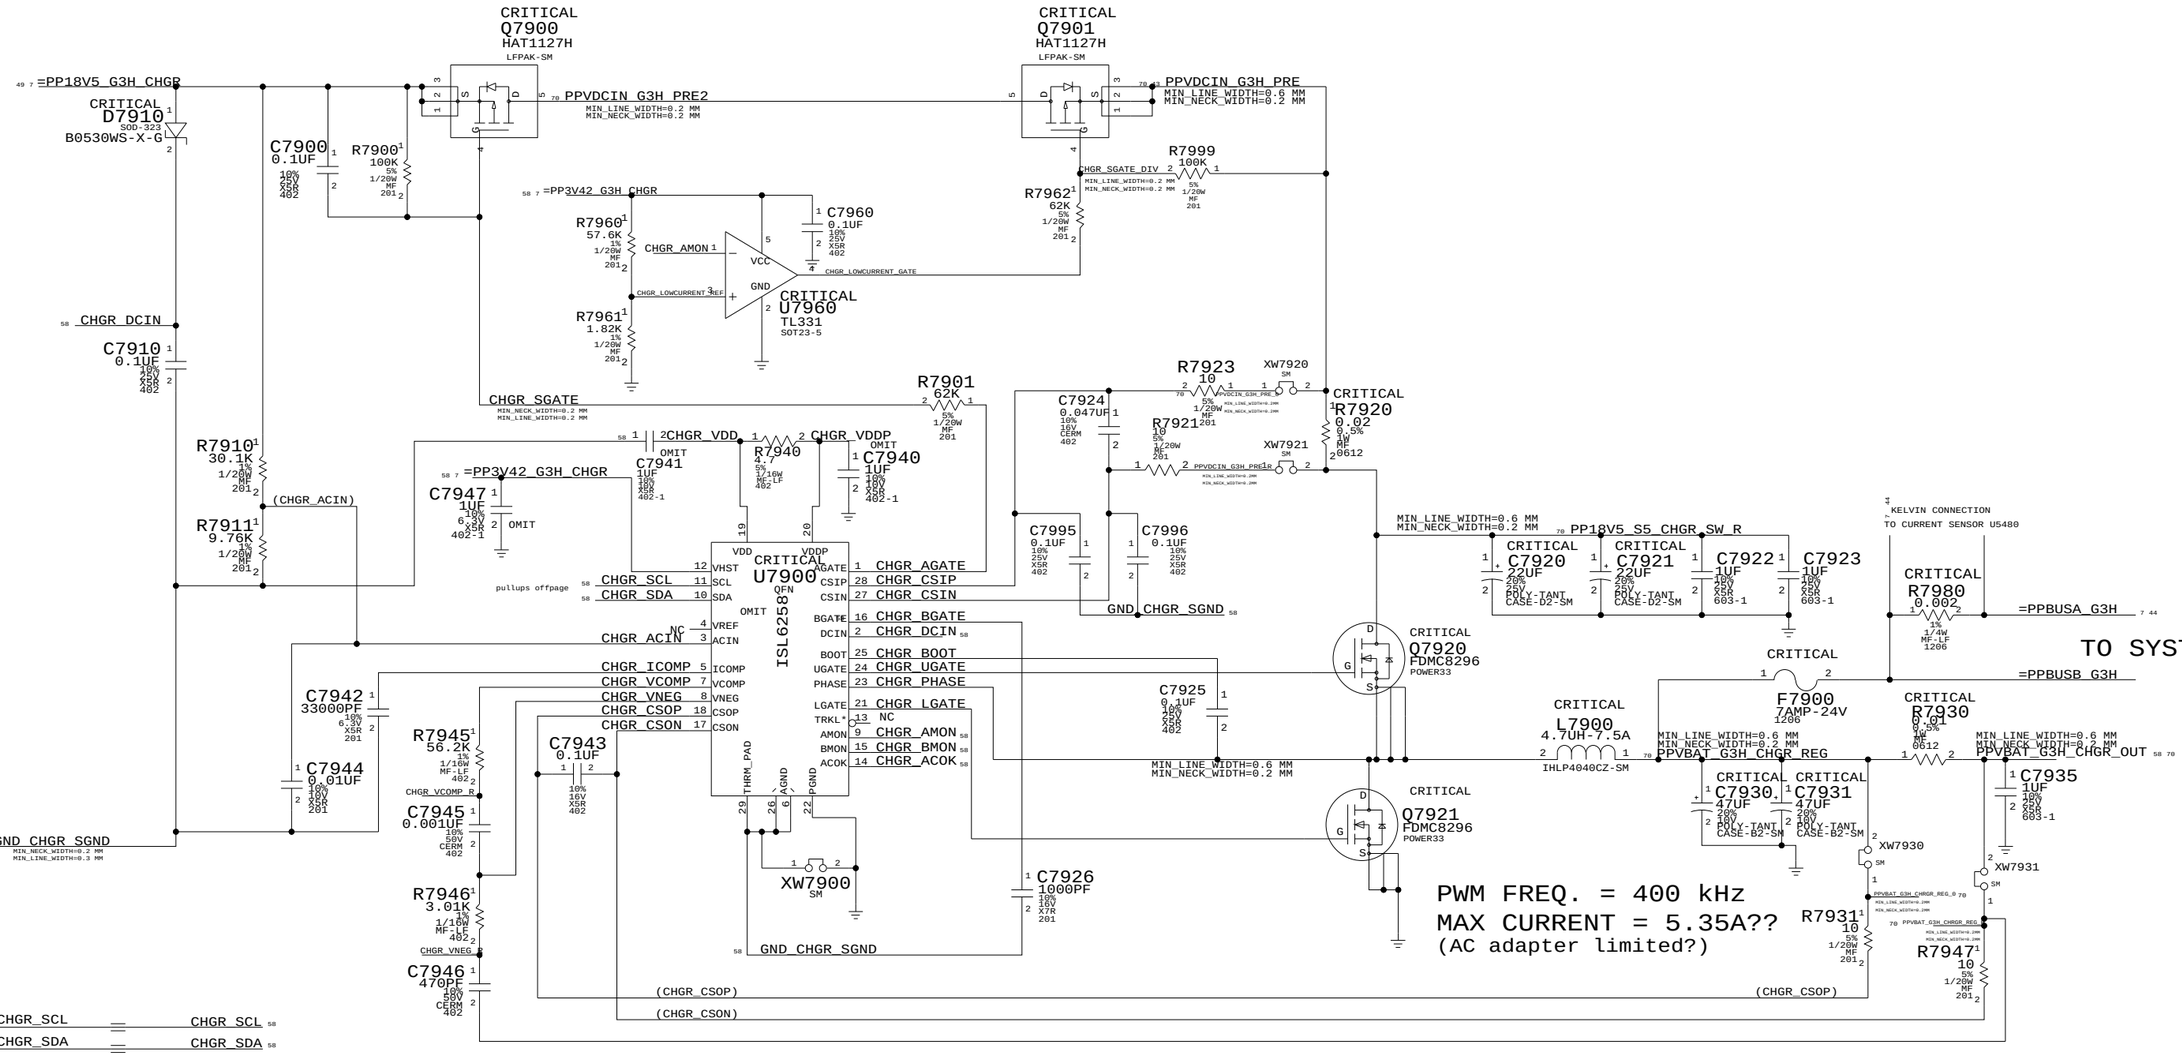

WWW.AliSaler.Com

LCD + CAMERA CONNECTOR

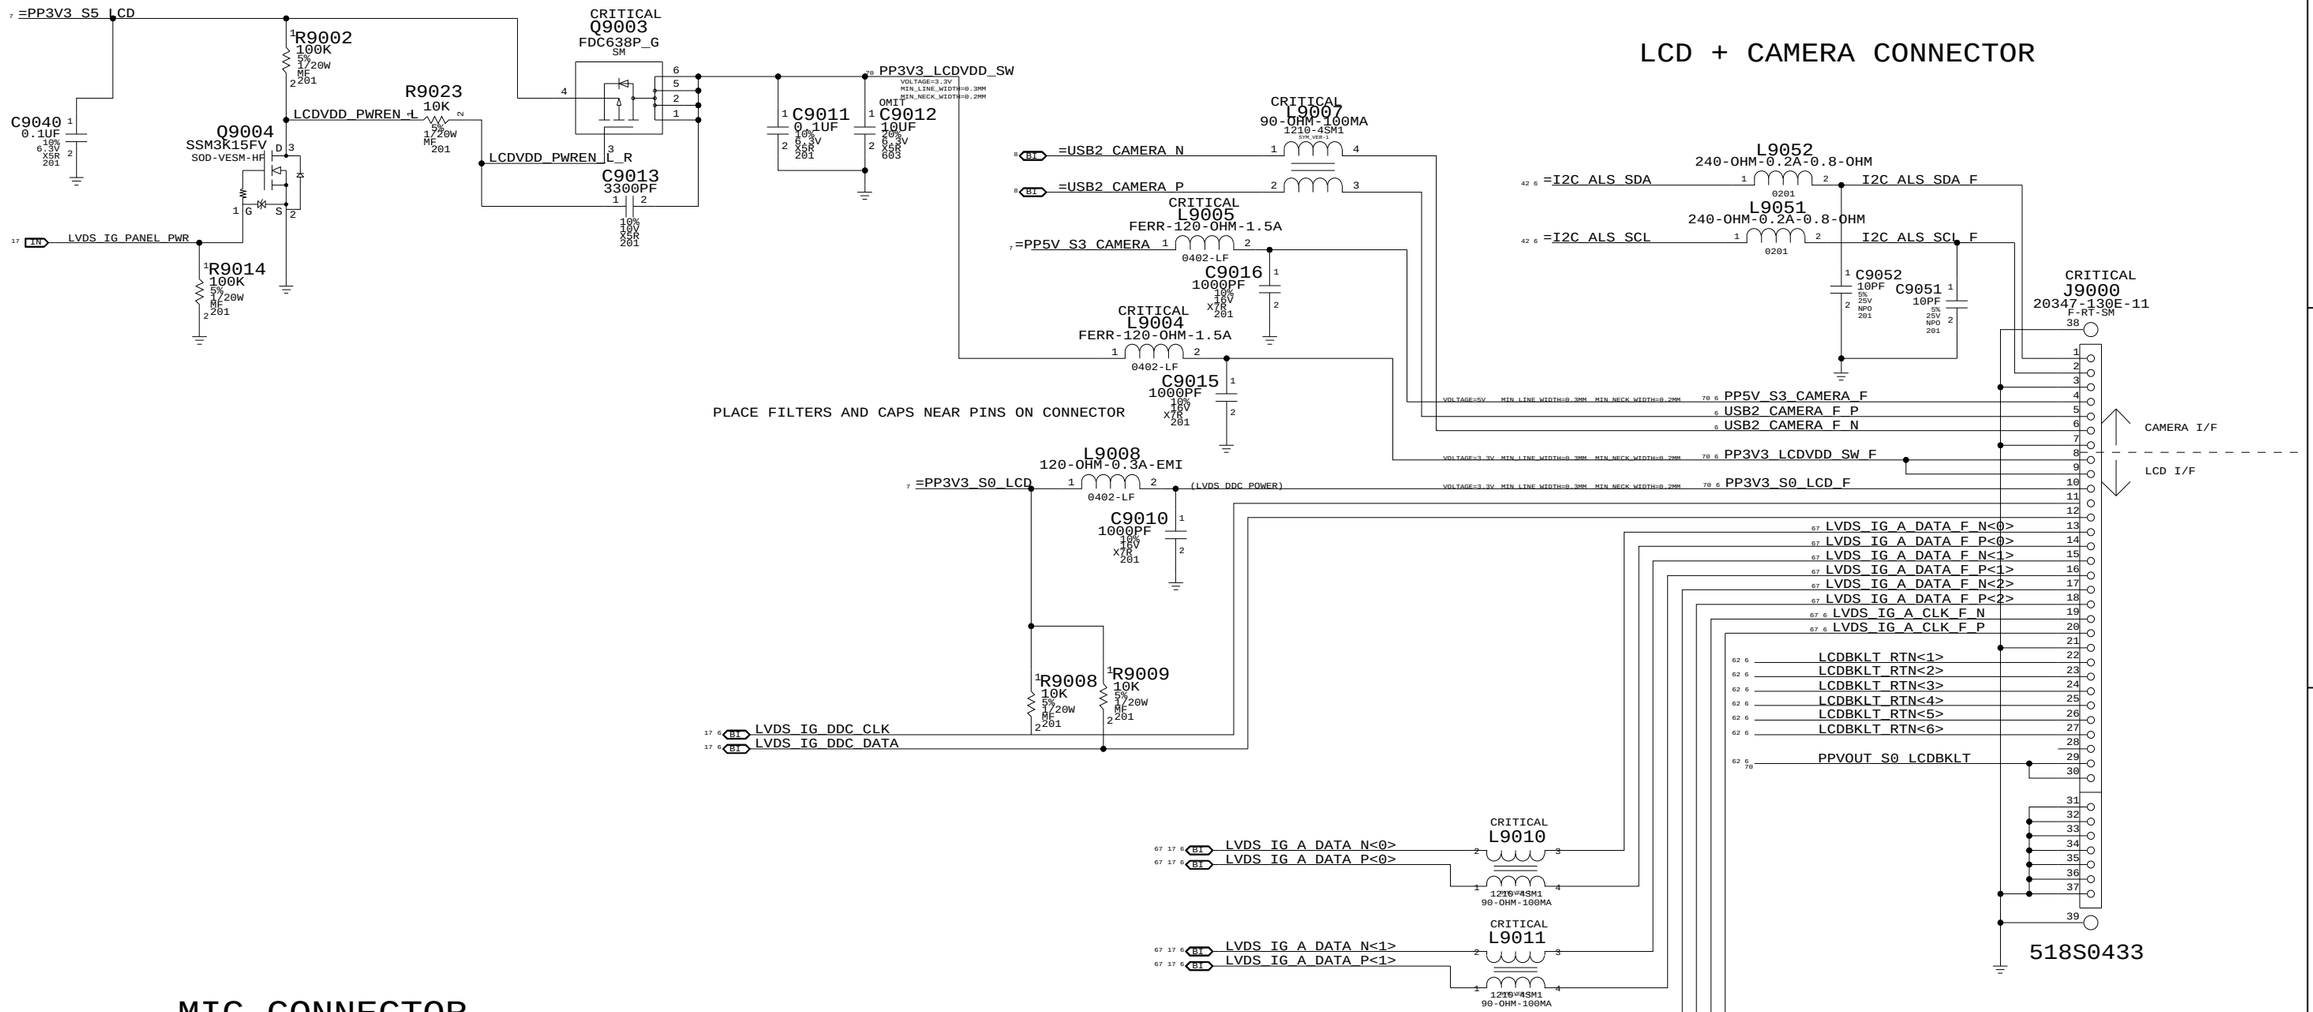

MIC CONNECTOR

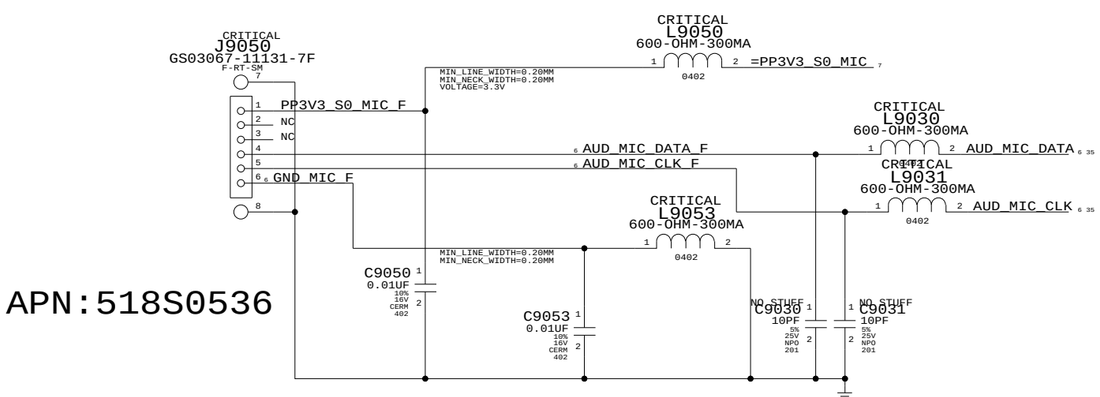

APN:518S0536

LVDS,Camera Conn. and ALS Conn.

SYNC_MASTER=GPU SYNC_DATE=06/23/2006

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 59 OF 71

WWW.AliSaler.Com

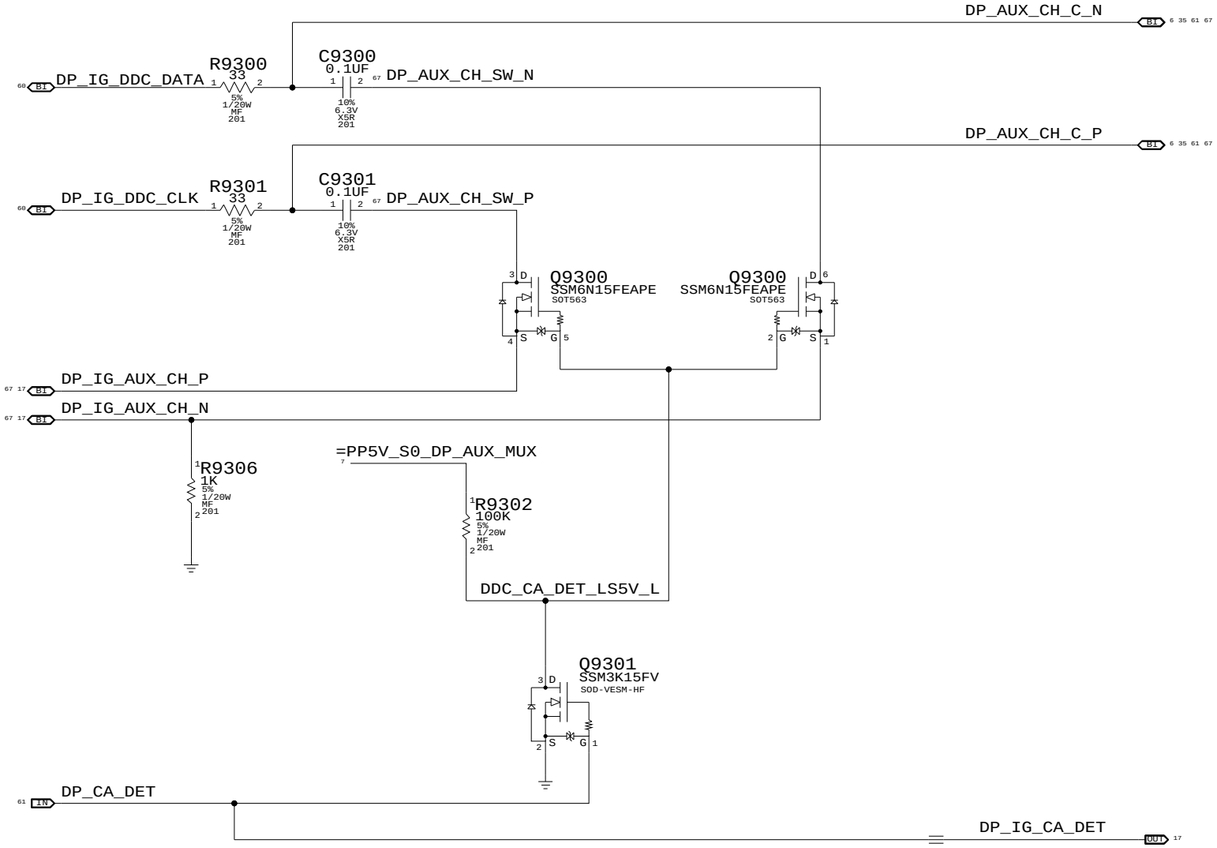


```
=MCP_HDMI_TXC_P          DP_ML_P<3>          MAKE_BASE=TRUE
=MCP_HDMI_TXC_N          DP_ML_N<3>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_P<0>       DP_ML_P<2>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_N<0>       DP_ML_N<2>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_P<1>       DP_ML_P<1>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_N<1>       DP_ML_N<1>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_P<2>       DP_ML_P<0>          MAKE_BASE=TRUE
=MCP_HDMI_TXD_N<2>       DP_ML_N<0>          MAKE_BASE=TRUE
=MCP_HDMI_HPD            DP_HPD              MAKE_BASE=TRUE
=MCP_HDMI_DDC_CLK        DP_IG_DDC_CLK       MAKE_BASE=TRUE
=MCP_HDMI_DDC_DATA       DP_IG_DDC_DATA      MAKE_BASE=TRUE
```

DISPLAYPORT SUPPORT

SYNC_MASTER=NMARTIN SYNC_DATE=12/18/2007

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 60 OF 71

WWW.AliSaler.Com

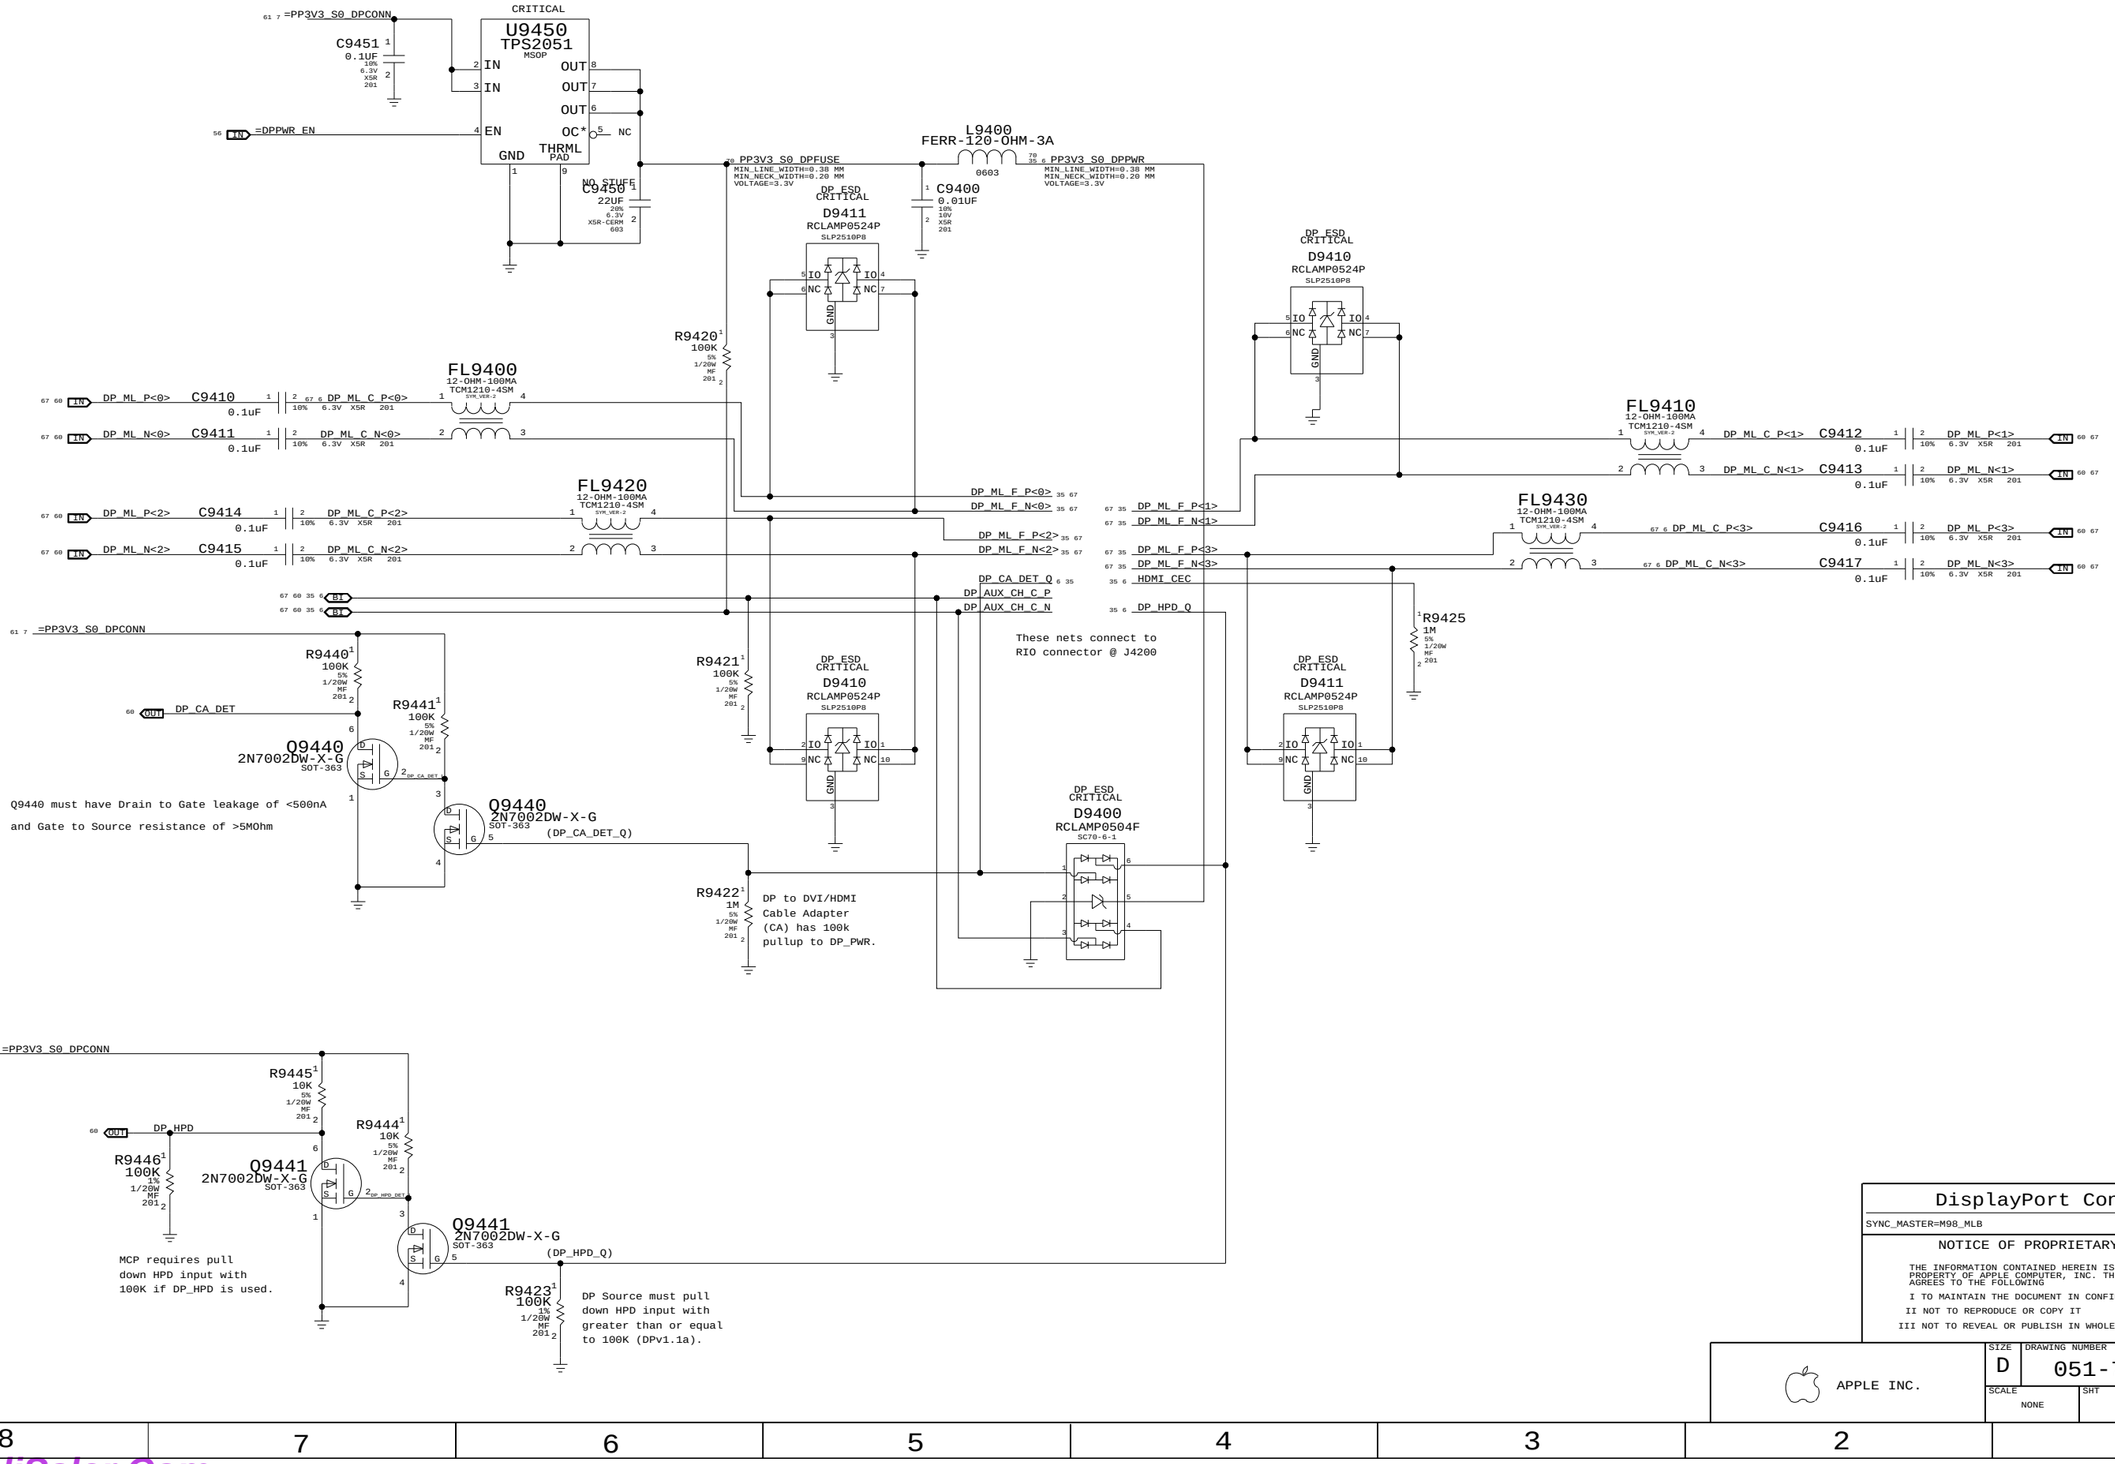

DisplayPort Connector

SYNC_MASTER=M98_MLB SYNC_DATE=01/17/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE	SHT	OF
NONE	61	71

WWW.AliSaler.Com

LED Backlight Driver

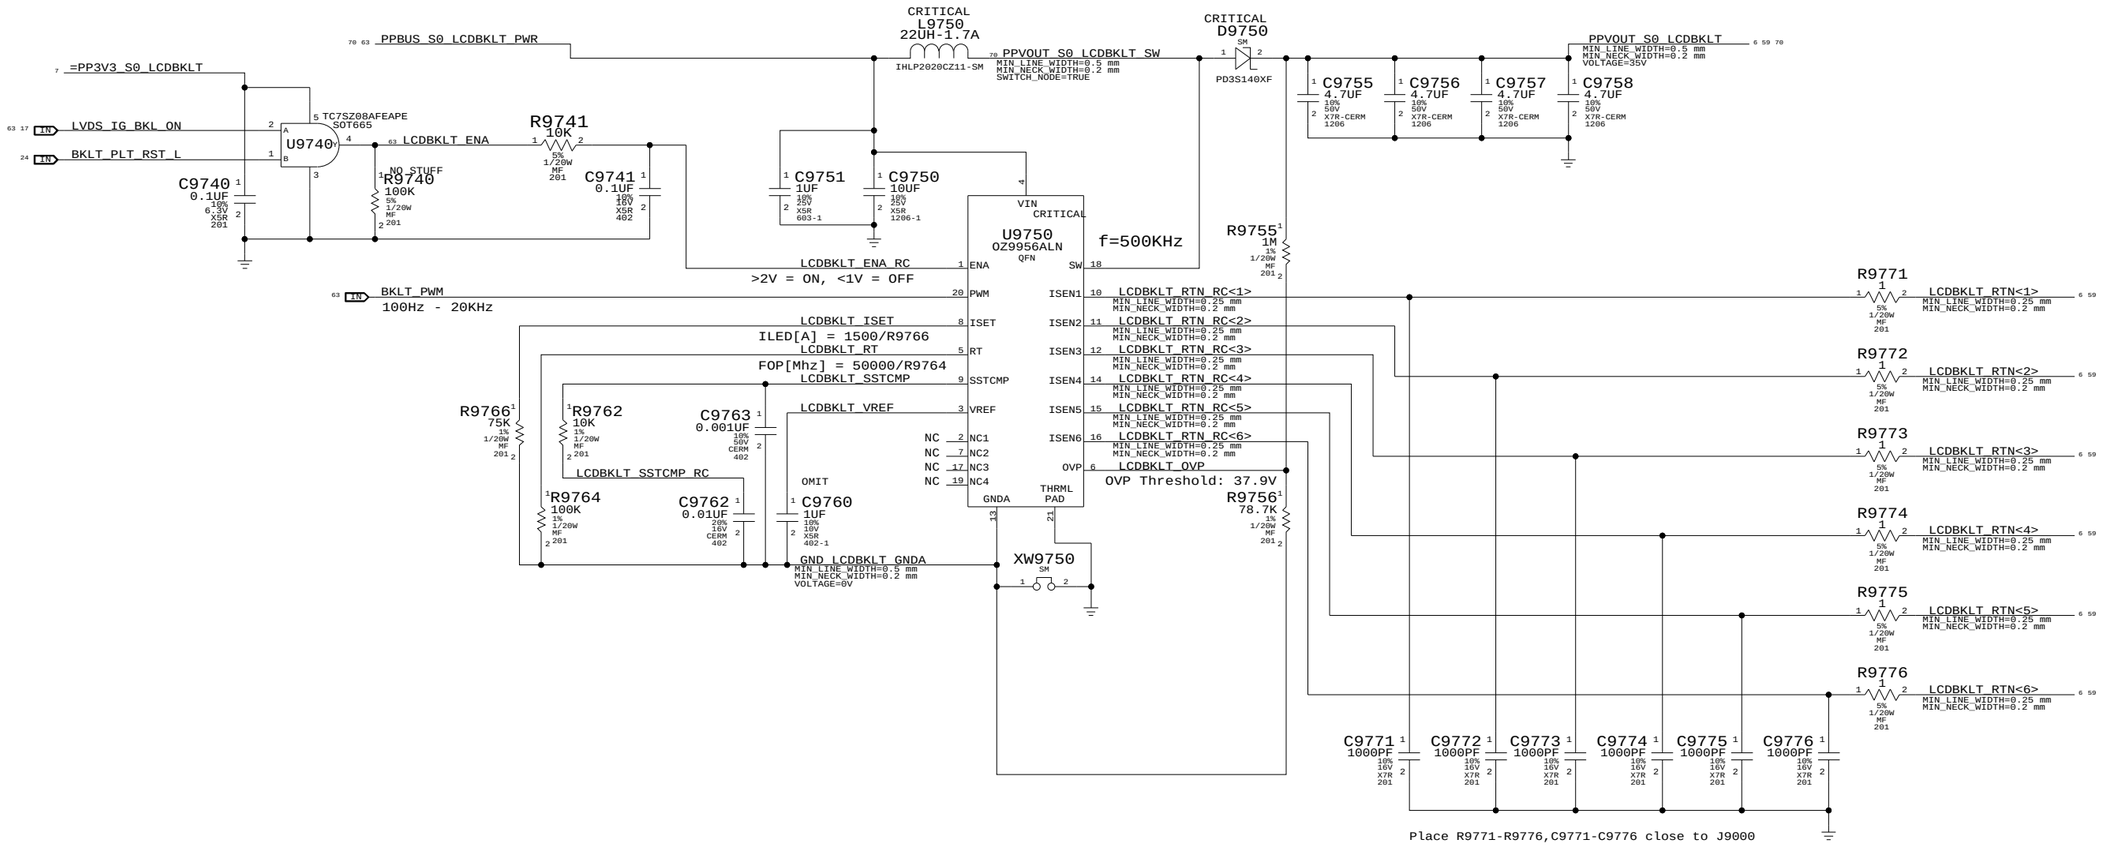

LED Backlight Driver

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE

SHT 62 OF 71

WWW.AliSaler.Com

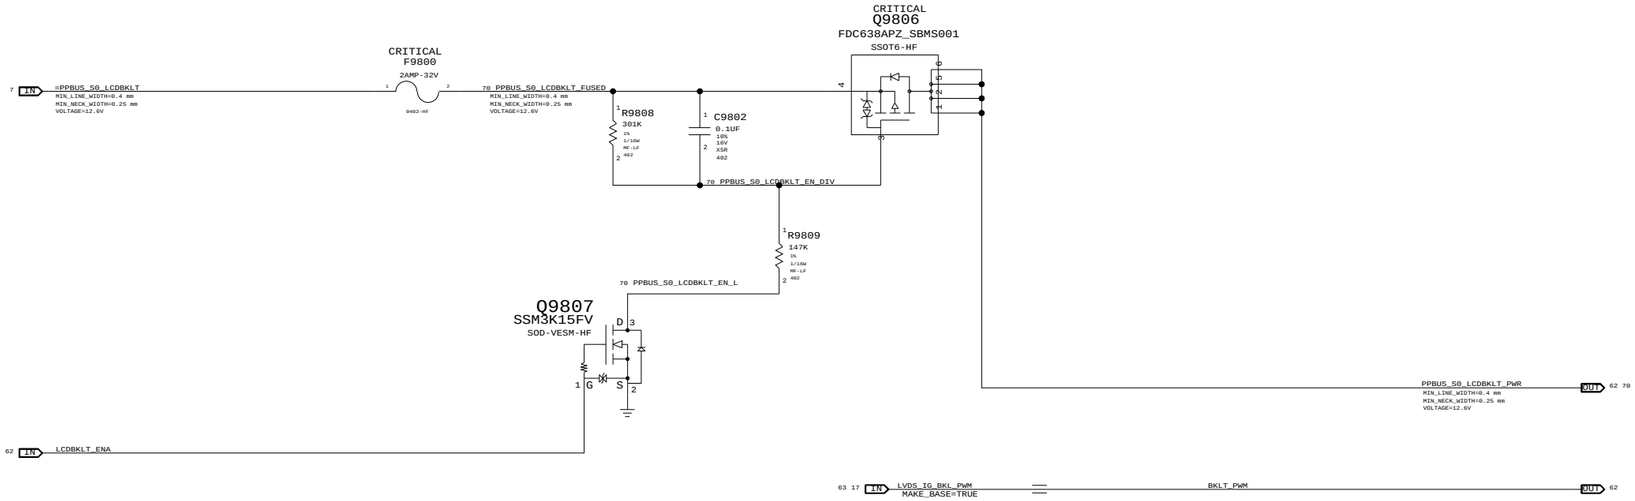

LCD Backlight Support

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 63 OF 71	

WWW.AliSaler.Com

ADDITIONAL CPU VCORE HF DECOUPLING

40x 2.2uF 0402

11 10 7 =PPVCORE_S0_CPU

LAYOUT NOTE:

PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C9900 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9901 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9902 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9903 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9904 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9905 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9906 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9907 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9908 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9909 2.2UF 20% 6.3V CERM 402-LF OMIT

LAYOUT NOTE:

PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C9910 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9911 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9912 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9913 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9914 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9915 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9916 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9917 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9918 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9919 2.2UF 20% 6.3V CERM 402-LF OMIT

LAYOUT NOTE:

PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C9920 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9921 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9922 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9923 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9924 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9925 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9926 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9927 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9928 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9929 2.2UF 20% 6.3V CERM 402-LF OMIT

LAYOUT NOTE:

PLACE ON OPPOSITE SIDE OF CPU

CRITICAL C9930 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9931 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9932 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9933 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9934 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9935 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9936 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9937 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9938 2.2UF 20% 6.3V CERM 402-LF OMIT	CRITICAL C9939 2.2UF 20% 6.3V CERM 402-LF OMIT

Additional CPU/GPU Decoupling

SYNC_MASTER= SYNC_DATE=

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE NONE	SHT 64 OF 71	

WWW.AliSaler.Com

FSB (Front-Side Bus) Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
FSB_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
FSB_DSTB_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=1:1_DIFFPAIR	=1:1_DIFFPAIR

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
FSB_DATA	*	=2x_DIELECTRIC	?
FSB_DSTB	*	=3x_DIELECTRIC	?
FSB_ADDR	*	=STANDARD	?
FSB_ADSTB	*	=2x_DIELECTRIC	?
FSB_1X	*	=STANDARD	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
FSB_DATA	TOP,BOTTOM	=4x_DIELECTRIC	?
FSB_DSTB	TOP,BOTTOM	=5x_DIELECTRIC	?
FSB_ADDR	TOP,BOTTOM	=3x_DIELECTRIC	?
FSB_ADSTB	TOP,BOTTOM	=4x_DIELECTRIC	?
FSB_1X	TOP,BOTTOM	=3x_DIELECTRIC	?

All 4x/2x/1x FSB signals with impedance requirements are 50-ohm single-ended.

FSB 4X signals / groups shown in signal table on right.
Signals within each 4x group should be matched within 5 ps of strobe.
DSTB# complementary pairs should be matched within 1 ps of each other, all DSTB#s matched to +/- 300 ps.
Spacing is 2x dielectric between DATA#, DINV# signals, with 3x dielectric spacing to the DSTB#s.
DSTB# complementary pairs are spaced normally and are NOT routed as differential pairs.

FSB 2X signals / groups shown in signal table on right.
Signals within each 2x group should be matched within 20 ps. ADTSB#s should be matched +/- 300 ps.
Spacing is 1x dielectric between ADDR#, REQ# signals, with 2x dielectric spacing to ADSTB#.

FSB 1X signals shown in signal table on right.
Signals within each 1x group should be matched to CPU clock, +0/-1000 mils.

Design Guide recommends each strobe/signal group is routed on the same layer.
Intel Design Guide recommends FSB signals be routed only on internal layers.

NOTE: Intel Design Guide allows closer spacing if signal lengths can be shortened.

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2
SOURCE: Santa Rosa Platform DG, Rev 1.5 (#22294), Sections 4.2 & 4.3

CPU Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CPU_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD
CPU_27P4S	*	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	=27P4_OHM_SE	7 MIL	7 MIL

NOTE: 7 mil gap is for VCCSense pair, which Intel says to route with 7 mil spacing without specifying a target impedance.

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CPU_AGTL	*	=STANDARD	?
CPU_8MIL	*	8 MIL	?
CPU_COMP	*	25 MIL	?
CPU_GTLREF	*	25 MIL	?
CPU_ITP	*	=2:1_SPACING	?
CPU_VCCSENSE	*	25 MIL	?

SR DG recommends at least 25 mils, >50 mils preferred

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CPU_AGTL	TOP,BOTTOM	=2x_DIELECTRIC	?

Most CPU signals with impedance requirements are 55-ohm single-ended.
Some signals require 27.4-ohm single-ended impedance.

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2
SOURCE: Santa Rosa Platform DG, Rev 0.9 (#20517), Sections 4.4 & 5.8.2.4

MCP FSB COMP Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_FSB_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2.4

FSB Clock Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CLK_FSB_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CLK_FSB	*	=3x_DIELECTRIC	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CLK_FSB	TOP,BOTTOM	=4x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v01), Section 2.2.5

CPU / FSB Net Properties

	ELECTRICAL_CONSTRAINT_SET	NET_TYPE: PHYSICAL	NET_TYPE: SPACING		
FSB 4X Signal Groups	FSB_DATA_GROUP0	FSB_50S	FSB_DATA	FSB_D_L<15..0>	9 13
	FSB_DATA_GROUP0	FSB_50S	FSB_DATA	FSB_DINV_L<0>	9 13
	FSB_DSTB0	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_P<0>	9 13
	FSB_DSTB0	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_N<0>	9 13
	FSB_DATA_GROUP1	FSB_50S	FSB_DATA	FSB_D_L<31..16>	9 13
	FSB_DATA_GROUP1	FSB_50S	FSB_DATA	FSB_DINV_L<1>	9 13
	FSB_DSTB1	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_P<1>	9 13
	FSB_DSTB1	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_N<1>	9 13
	FSB_DATA_GROUP2	FSB_50S	FSB_DATA	FSB_D_L<47..32>	9 13
	FSB_DATA_GROUP2	FSB_50S	FSB_DATA	FSB_DINV_L<2>	9 13
	FSB_DSTB2	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_P<2>	9 13
	FSB_DSTB2	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_N<2>	9 13
	FSB_DATA_GROUP3	FSB_50S	FSB_DATA	FSB_D_L<63..48>	9 13
	FSB_DATA_GROUP3	FSB_50S	FSB_DATA	FSB_DINV_L<3>	9 13
	FSB_DSTB3	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_P<3>	9 13
	FSB_DSTB3	FSB_DSTB_50S	FSB_DSTB	FSB_DSTB_L_N<3>	9 13
FSB 2X Signals	FSB_ADDR_GROUP0	FSB_50S	FSB_ADDR	FSB_A_L<16..3>	9 13
	FSB_ADDR_GROUP0	FSB_50S	FSB_ADDR	FSB_REQ_L<4..0>	9 13
	FSB_ADSTB0	FSB_50S	FSB_ADSTB	FSB_ADSTB_L<0>	9 13
	FSB_ADDR_GROUP1	FSB_50S	FSB_ADDR	FSB_A_L<35..17>	9 13
	FSB_ADSTB1	FSB_50S	FSB_ADSTB	FSB_ADSTB_L<1>	9 13
FSB 1X Signals	FSB_1X	FSB_50S	FSB_1X	FSB_ADS_L	9 13
	FSB_BREQ0_L	FSB_50S	FSB_1X	FSB_BREQ0_L	8 9 13
	FSB_BREQ1_L	FSB_50S	FSB_1X	FSB_BREQ1_L	13
	FSB_1X	FSB_50S	FSB_1X	FSB_BNR_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_BPRI_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_DBSY_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_DEFER_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_DRDY_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_HIT_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_HITM_L	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_LOCK_L	9 13
	FSB_CPURST_L	FSB_50S	FSB_1X	FSB_CPURST_L	8 9 12 13
	FSB_1X	FSB_50S	FSB_1X	FSB_RS_L<2..0>	9 13
	FSB_1X	FSB_50S	FSB_1X	FSB_TRDY_L	9 13
	CPU_ASYNC	CPU_50S	CPU_AGTL	CPU_A20M_L	9 13
	CPU_BSEL	CPU_50S	CPU_AGTL	CPU_BSEL<2..0>	8 9
	CPU_FERR_L	CPU_50S	CPU_8MIL	CPU_FERR_L	9 13
	CPU_ASYNC	CPU_50S	CPU_AGTL	CPU_IGNNE_L	9 13
	CPU_INIT_L	CPU_50S	CPU_AGTL	CPU_INIT_L	9 13
	CPU_ASYNC_R	CPU_50S	CPU_AGTL	CPU_INTR	8 9 13
	CPU_ASYNC_R	CPU_50S	CPU_AGTL	CPU_NMI	8 9 13
	CPU_PROCHOT_L	CPU_50S	CPU_AGTL	CPU_PROCHOT_L	9 13 40 50
	CPU_PWRGD	CPU_50S	CPU_AGTL	CPU_PWRGD	9 12 13
	CPU_ASYNC	CPU_50S	CPU_AGTL	CPU_SMI_L	9 13
	CPU_ASYNC	CPU_50S	CPU_AGTL	CPU_STPCLK_L	9 13
	PM_THRMTRIP_L	CPU_50S	CPU_8MIL	PM_THRMTRIP_L	9 13 40
	FSB_CPUSLP_L	CPU_50S	CPU_AGTL	FSB_CPUSLP_L	9 13
	CPU_FROM_SB	CPU_50S	CPU_AGTL	CPU_DPSLP_L	9 13
	CPU_DPRSTP_L	CPU_50S	CPU_AGTL	CPU_DPRSTP_L	8 9 13 50
	CPU_ASYNC	CPU_50S	CPU_AGTL	FSB_DPWR_L	9 13
	MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP_BCLK_VML_COMP_VDD	13
	MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP_BCLK_VML_COMP_GND	13
	MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP_CPU_COMP_VCC	13
	MCP_CPU_COMP	MCP_50S	MCP_FSB_COMP	MCP_CPU_COMP_GND	13
	FSB_CLK_CPU	CLK_FSB_100D	CLK_FSB	FSB_CLK_CPU_P	9 13
	FSB_CLK_CPU	CLK_FSB_100D	CLK_FSB	FSB_CLK_CPU_N	9 13
	FSB_CLK_ITP	CLK_FSB_100D	CLK_FSB	FSB_CLK_ITP_P	6 12 13
	FSB_CLK_ITP	CLK_FSB_100D	CLK_FSB	FSB_CLK_ITP_N	6 12 13
	FSB_CLK_MCP	CLK_FSB_100D	CLK_FSB	FSB_CLK_MCP_P	13
	FSB_CLK_MCP	CLK_FSB_100D	CLK_FSB	FSB_CLK_MCP_N	13
	CPU_IERR_L	CPU_50S		CPU_IERR_L	9
	PM_DPRSLPVR	CPU_50S	CPU_AGTL	PM_DPRSLPVR	20 50
	(See above)	CPU_50S	CPU_AGTL	IMVP_DPRSLPVR	50
	CPU_GTLREF	CPU_50S	CPU_GTLREF	CPU_GTLREF	9 25
	CPU_COMP	CPU_50S	CPU_COMP	CPU_COMP<3>	9
	CPU_COMP	CPU_27P4S	CPU_COMP	CPU_COMP<2>	9
	CPU_COMP	CPU_50S	CPU_COMP	CPU_COMP<1>	9
	CPU_COMP	CPU_27P4S	CPU_COMP	CPU_COMP<0>	9
	XDP_TDI	CPU_50S	CPU_ITP	XDP_TDI	6 9 12
	XDP_TDO	CPU_50S	CPU_ITP	XDP_TDO	9 12
	XDP_TMS	CPU_50S	CPU_ITP	XDP_TMS	6 9 12
	XDP_TCK	CPU_50S	CPU_ITP	XDP_TCK	6 9 12
	XDP_TRST_L	CPU_50S	CPU_ITP	XDP_TRST_L	6 9 12
	XDP_BPM_L	CPU_50S	CPU_ITP	XDP_BPM_L<4..0>	6 9 12
	XDP_BPM_L5	CPU_50S	CPU_ITP	XDP_BPM_L<5>	6 9 12
	(FSB_CPURST_L)	CPU_50S	CPU_ITP	XDP_CPURST_L	6 12
		CPU_50S	CPU_8MIL	CPU_VID<6..0>	10 11 50
		CPU_50S	CPU_8MIL	IMVP6_VID<6..0>	11
	CPU_VCCSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCSENSE_P	10 50
	CPU_VCCSENSE	CPU_27P4S	CPU_VCCSENSE	CPU_VCCSENSE_N	10 50
	(CPU_VCCSENSE)	CPU_27P4S	CPU_VCCSENSE	IMVP6_VSEN_P	50
	(CPU_VCCSENSE)	CPU_27P4S	CPU_VCCSENSE	IMVP6_VSEN_N	50

CPU/FSB Constraints

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 65 OF 71	

WWW.AliSaler.Com

Memory Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MEM_50S	*	=50_OHM_SE	=50_OHM_SE	0.110 MM	=50_OHM_SE	=STANDARD	=STANDARD
MEM_50S_VDD	*	=50_OHM_SE	=50_OHM_SE	0.110 MM	=50_OHM_SE	=STANDARD	=STANDARD
MEM_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF
MEM_90D_VDD	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MEM_CLK2MEM	*	=2.28:1_SPACING	?
MEM_CTRL2CTRL	*	=1.1:1_SPACING	?
MEM_CTRL2MEM	*	=2.28:1_SPACING	?
MEM_CMD2CMD	*	=1.1:1_SPACING	?
MEM_CMD2MEM	*	=2.28:1_SPACING	?
MEM_DATA2DATA	*	=1.1:1_SPACING	?
MEM_DATA2MEM	*	=2.28:1_SPACING	?
MEM_DQS2MEM	*	=2.28:1_SPACING	?
MEM_2OTHER	*	25 MIL	?

Memory Bus Spacing Group Assignments

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	MEM_CLK	*	MEM_CLK2MEM
MEM_CLK	MEM_CTRL	*	MEM_CLK2MEM
MEM_CLK	MEM_CMD	*	MEM_CLK2MEM
MEM_CLK	MEM_DATA	*	MEM_CLK2MEM
MEM_CLK	MEM_DQS	*	MEM_CLK2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CMD	MEM_CLK	*	MEM_CMD2MEM
MEM_CMD	MEM_CTRL	*	MEM_CMD2MEM
MEM_CMD	MEM_CMD	*	MEM_CMD2CMD
MEM_CMD	MEM_DATA	*	MEM_CMD2MEM
MEM_CMD	MEM_DQS	*	MEM_CMD2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CTRL	MEM_CLK	*	MEM_CTRL2MEM
MEM_CTRL	MEM_CTRL	*	MEM_CTRL2CTRL
MEM_CTRL	MEM_CMD	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DATA	*	MEM_CTRL2MEM
MEM_CTRL	MEM_DQS	*	MEM_CTRL2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_DATA	MEM_CLK	*	MEM_DATA2MEM
MEM_DATA	MEM_CTRL	*	MEM_DATA2MEM
MEM_DATA	MEM_CMD	*	MEM_DATA2MEM
MEM_DATA	MEM_DATA	*	MEM_DATA2DATA
MEM_DATA	MEM_DQS	*	MEM_DATA2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_DQS	MEM_CLK	*	MEM_DQS2MEM
MEM_DQS	MEM_CTRL	*	MEM_DQS2MEM
MEM_DQS	MEM_CMD	*	MEM_DQS2MEM
MEM_DQS	MEM_DATA	*	MEM_DQS2MEM
MEM_DQS	MEM_DQS	*	MEM_DQS2MEM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	*	*	MEM_2OTHER
MEM_CTRL	*	*	MEM_2OTHER
MEM_CMD	*	*	MEM_2OTHER
MEM_DATA	*	*	MEM_2OTHER
MEM_DQS	*	*	MEM_2OTHER

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	GND	*	GND_P2MM
MEM_CMD	GND	*	GND_P2MM
MEM_CTRL	GND	*	GND_P2MM
MEM_DATA	GND	*	GND_P2MM
MEM_DQS	GND	*	GND_P2MM
MEM_CLK	PP1V5_MEM	*	PWR_P2MM
MEM_CTRL	PP1V5_MEM	*	PWR_P2MM
MEM_DATA	PP1V5_MEM	*	PWR_P2MM
MEM_DQS	PP1V5_MEM	*	PWR_P2MM
MEM_CMD	PP1V5_MEM	*	PWR_P2MM

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
MEM_CLK	PWR	*	BUS2PWR_GND
MEM_CLK	GND	*	BUS2PWR_GND
MEM_CTRL	PWR	*	BUS2PWR_GND
MEM_CTRL	GND	*	BUS2PWR_GND
MEM_CMD	PWR	*	BUS2PWR_GND
MEM_CMD	GND	*	BUS2PWR_GND
MEM_DATA	PWR	*	BUS2PWR_GND
MEM_DATA	GND	*	BUS2PWR_GND
MEM_DQS	PWR	*	BUS2PWR_GND
MEM_DQS	GND	*	BUS2PWR_GND

DDR3:

DQ signals should be matched within 5 ps of associated DQS pair.
DQS intra-pair matching should be within 1 ps, inter-pair matching shoulw be within 180 ps
No DQS to clock matching requirement.
CLK intra-pair matching should be within 1 ps, inter-pair matching should be within 2 ps.
A/BA/cmd signals should be matched within 5 ps of CLK pairs.
All memory signals maximum length is 1.005 ps. CLK minimum length is 594 ps (lengths include substrate).
DQ/A/BA/cmd signal spacing is 3x dielectric, DQS/CLK is 4x dielectric.

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.3
SOURCE: Santa Rosa Platform DG, Rev 1.0 (#21112), Section 6.2

MCP MEM COMP Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_MEM_COMP	*	Y	7 MIL	7 MIL	=STANDARD	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_MEM_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.3.4

Memory Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE PHYSICAL	NET_TYPE SPACING		
MEM_A_CLK	MEM_90D	MEM_CLK	MEM_A_CLK_P<0>	14 27 28 33
MEM_A_CLK	MEM_90D	MEM_CLK	MEM_A_CLK_N<0>	14 27 28 33
MEM_A_CNTL	MEM_50S	MEM_CTRL	MEM_A_CKE<1..0>	14 27 28 33
MEM_A_CNTL	MEM_50S	MEM_CTRL	MEM_A_CS_L<1..0>	14 27 28 33
MEM_A_CNTL	MEM_50S	MEM_CTRL	MEM_A_ODT<1..0>	14 27 28 33
MEM_A_CMD	MEM_50S	MEM_CMD	MEM_A_A<14..0>	14 27 28 33
MEM_A_CMD	MEM_50S	MEM_CMD	MEM_A_BA<2..0>	14 27 28 33
MEM_A_CMD	MEM_50S	MEM_CMD	MEM_A_RAS_L	14 27 28 33
MEM_A_CMD	MEM_50S	MEM_CMD	MEM_A_CAS_L	14 27 28 33
MEM_A_CMD	MEM_50S	MEM_CMD	MEM_A_WE_L	14 27 28 33
MEM_A_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_A_DQ<7..0>	14 27
MEM_A_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_A_DQ<15..8>	14 27
MEM_A_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_A_DQ<23..16>	14 27
MEM_A_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_A_DQ<31..24>	14 27
MEM_A_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_A_DQ<39..32>	14 28
MEM_A_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_A_DQ<47..40>	14 28
MEM_A_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_A_DQ<55..48>	14 28
MEM_A_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_A_DQ<63..56>	14 28
MEM_A_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_A_DM<0>	14 27
MEM_A_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_A_DM<1>	14 27
MEM_A_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_A_DM<2>	14 27
MEM_A_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_A_DM<3>	14 27
MEM_A_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_A_DM<4>	14 28
MEM_A_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_A_DM<5>	14 28
MEM_A_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_A_DM<6>	14 28
MEM_A_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_A_DM<7>	14 28
MEM_A_DQS0	MEM_90D	MEM_DQS	MEM_A_DQS_P<0>	14 27
MEM_A_DQS0	MEM_90D	MEM_DQS	MEM_A_DQS_N<0>	14 27
MEM_A_DQS1	MEM_90D	MEM_DQS	MEM_A_DQS_P<1>	14 27
MEM_A_DQS1	MEM_90D	MEM_DQS	MEM_A_DQS_N<1>	14 27
MEM_A_DQS2	MEM_90D	MEM_DQS	MEM_A_DQS_P<2>	14 27
MEM_A_DQS2	MEM_90D	MEM_DQS	MEM_A_DQS_N<2>	14 27
MEM_A_DQS3	MEM_90D	MEM_DQS	MEM_A_DQS_P<3>	14 27
MEM_A_DQS3	MEM_90D	MEM_DQS	MEM_A_DQS_N<3>	14 27
MEM_A_DQS4	MEM_90D	MEM_DQS	MEM_A_DQS_P<4>	14 28
MEM_A_DQS4	MEM_90D	MEM_DQS	MEM_A_DQS_N<4>	14 28
MEM_A_DQS5	MEM_90D	MEM_DQS	MEM_A_DQS_P<5>	14 28
MEM_A_DQS5	MEM_90D	MEM_DQS	MEM_A_DQS_N<5>	14 28
MEM_A_DQS6	MEM_90D	MEM_DQS	MEM_A_DQS_P<6>	14 28
MEM_A_DQS6	MEM_90D	MEM_DQS	MEM_A_DQS_N<6>	14 28
MEM_A_DQS7	MEM_90D	MEM_DQS	MEM_A_DQS_P<7>	14 28
MEM_A_DQS7	MEM_90D	MEM_DQS	MEM_A_DQS_N<7>	14 28
MEM_B_CLK	MEM_90D	MEM_CLK	MEM_B_CLK_P<0>	14 29 30 33
MEM_B_CLK	MEM_90D	MEM_CLK	MEM_B_CLK_N<0>	14 29 30 33
MEM_B_CNTL	MEM_50S	MEM_CTRL	MEM_B_CKE<1..0>	14 29 30 33
MEM_B_CNTL	MEM_50S	MEM_CTRL	MEM_B_CS_L<1..0>	14 29 30 33
MEM_B_CNTL	MEM_50S	MEM_CTRL	MEM_B_ODT<1..0>	14 29 30 33
MEM_B_CMD	MEM_50S	MEM_CMD	MEM_B_A<14..0>	14 29 30 33
MEM_B_CMD	MEM_50S	MEM_CMD	MEM_B_BA<2..0>	14 29 30 33
MEM_B_CMD	MEM_50S	MEM_CMD	MEM_B_RAS_L	14 29 30 33
MEM_B_CMD	MEM_50S	MEM_CMD	MEM_B_CAS_L	14 29 30 33
MEM_B_CMD	MEM_50S	MEM_CMD	MEM_B_WE_L	14 29 30 33
MEM_B_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_B_DQ<7..0>	14 29
MEM_B_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_B_DQ<15..8>	14 29
MEM_B_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_B_DQ<23..16>	14 29
MEM_B_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_B_DQ<31..24>	14 29
MEM_B_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_B_DQ<39..32>	14 30
MEM_B_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_B_DQ<47..40>	14 30
MEM_B_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_B_DQ<55..48>	14 30
MEM_B_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_B_DQ<63..56>	14 30
MEM_B_DQ_BYTE0	MEM_50S	MEM_DATA	MEM_B_DM<0>	14 29
MEM_B_DQ_BYTE1	MEM_50S	MEM_DATA	MEM_B_DM<1>	14 29
MEM_B_DQ_BYTE2	MEM_50S	MEM_DATA	MEM_B_DM<2>	14 29
MEM_B_DQ_BYTE3	MEM_50S	MEM_DATA	MEM_B_DM<3>	14 29
MEM_B_DQ_BYTE4	MEM_50S	MEM_DATA	MEM_B_DM<4>	14 30
MEM_B_DQ_BYTE5	MEM_50S	MEM_DATA	MEM_B_DM<5>	14 30
MEM_B_DQ_BYTE6	MEM_50S	MEM_DATA	MEM_B_DM<6>	14 30
MEM_B_DQ_BYTE7	MEM_50S	MEM_DATA	MEM_B_DM<7>	14 30
MEM_B_DQS0	MEM_90D	MEM_DQS	MEM_B_DQS_P<0>	14 29
MEM_B_DQS0	MEM_90D	MEM_DQS	MEM_B_DQS_N<0>	14 29
MEM_B_DQS1	MEM_90D	MEM_DQS	MEM_B_DQS_P<1>	14 29
MEM_B_DQS1	MEM_90D	MEM_DQS	MEM_B_DQS_N<1>	14 29
MEM_B_DQS2	MEM_90D	MEM_DQS	MEM_B_DQS_P<2>	14 29
MEM_B_DQS2	MEM_90D	MEM_DQS	MEM_B_DQS_N<2>	14 29
MEM_B_DQS3	MEM_90D	MEM_DQS	MEM_B_DQS_P<3>	14 29
MEM_B_DQS3	MEM_90D	MEM_DQS	MEM_B_DQS_N<3>	14 29
MEM_B_DQS4	MEM_90D	MEM_DQS	MEM_B_DQS_P<4>	14 30
MEM_B_DQS4	MEM_90D	MEM_DQS	MEM_B_DQS_N<4>	14 30
MEM_B_DQS5	MEM_90D	MEM_DQS	MEM_B_DQS_P<5>	14 30
MEM_B_DQS5	MEM_90D	MEM_DQS	MEM_B_DQS_N<5>	14 30
MEM_B_DQS6	MEM_90D	MEM_DQS	MEM_B_DQS_P<6>	14 30
MEM_B_DQS6	MEM_90D	MEM_DQS	MEM_B_DQS_N<6>	14 30
MEM_B_DQS7	MEM_90D	MEM_DQS	MEM_B_DQS_P<7>	14 30
MEM_B_DQS7	MEM_90D	MEM_DQS	MEM_B_DQS_N<7>	14 30
MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP_VDD VOLTAGE=0V	15
MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP	MCP_MEM_COMP_GND VOLTAGE=1.5V	15
		MEM_CLK	MEM_RESET_L	30 26 27 28 29

=PP1V8R1V5_S0_MCP_MEM NET_SPACING_TYPE=PP1V5_MEM 22 7 15

GND NET_SPACING_TYPE=GND

Memory Constraints

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE
II NOT TO REPRODUCE OR COPY IT
III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 66 OF 71

WWW.AliSaler.Com

PCI-Express

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCIE_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF
CLK_PCIE_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCIE	*	=3X_DIELECTRIC	?
CLK_PCIE	*	20 MIL	?
MCP_PEX_COMP	*	8 MIL	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCIE	TOP,BOTTOM	=4X_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.4

Analog Video Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CRT_50S	*	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=50_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CRT	*	=4:1_SPACING	?
CRT_2CRT	*	=STANDARD	?
CRT_2CLK	*	50 MIL	?
CRT_2SWITCHER	*	250 MIL	?
CRT_SYNC	*	16 MIL	?
MCP_DAC_COMP	*	=2:1_SPACING	?

CRT signal single-ended impedence varies by location:
- 37.5-ohm from MCP to first termination resistor.
- 50-ohm from first to second termination resistor.
- 75-ohm from output of three-pole filter to connector (if possible).

R/G/B signals should be matched as close as possible and < 10 inches.
SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Sections 2.5.1 & 2.5.2.

Digital Video Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
DP_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF
LVDS_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF
MCP_DV_COMP	*	Y	20 MIL	20 MIL	=STANDARD	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DISPLAYPORT	*	=3x_DIELECTRIC	?
LVDS	*	=3x_DIELECTRIC	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DISPLAYPORT	TOP,BOTTOM	=4x_DIELECTRIC	?
LVDS	TOP,BOTTOM	=4x_DIELECTRIC	?

LVDS intra-pair matching should be 5 mils. Pairs should be within 100 mils of clock length.
DisplayPort/TMDS intra-pair matching should be 5 ps. Inter-pair matching should be within 150 ps.
DIsplayPort AUX CH intra-pair matching should be 5 ps. No relationship to other signals.
Max length of LVDS/DisplayPort/TMDS traces: 12 inches.
SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Sections 2.5.3 & 2.5.4.

SATA Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SATA_100D	*	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF	=100_OHM_DIFF
SATA_100D_HDD	*	=100_OHM_DIFF_HDD	=100_OHM_DIFF_HDD	=100_OHM_DIFF_HDD	=100_OHM_DIFF_HDD	=100_OHM_DIFF_HDD	=100_OHM_DIFF_HDD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SATA	*	=4x_DIELECTRIC	?
SATA_TERMP	*	8 MIL	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SATA	TOP,BOTTOM	=3x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.7.1.

ELECTRICAL_CONSTRAINT_SET	NET_TYPE PHYSICAL	NET_TYPE SPACING		
	PCIE_90D	PCIE	PEG_R2D_P<15..0>	
	PCIE_90D	PCIE	PEG_R2D_N<15..0>	
PEG_R2D	PCIE_90D	PCIE	PEG_R2D_C_P<15..0>	
	PCIE_90D	PCIE	PEG_R2D_C_N<15..0>	
PEG_D2R	PCIE_90D	PCIE	PEG_D2R_P<15..0>	
	PCIE_90D	PCIE	PEG_D2R_N<15..0>	
	PCIE_90D	PCIE	PEG_D2R_C_P<15..0>	
	PCIE_90D	PCIE	PEG_D2R_C_N<15..0>	
	PCIE_90D	PCIE	PCIE_MINI_R2D_P	
	PCIE_90D	PCIE	PCIE_MINI_R2D_N	
PCIE_MINI_R2D	PCIE_90D	PCIE	PCIE_MINI_R2D_C_P	16 34
	PCIE_90D	PCIE	PCIE_MINI_R2D_C_N	16 34
PCIE_MINI_D2R	PCIE_90D	PCIE	PCIE_MINI_D2R_P	16 34
	PCIE_90D	PCIE	PCIE_MINI_D2R_N	16 34
	PCIE_90D	PCIE	PCIE_FW_R2D_P	
	PCIE_90D	PCIE	PCIE_FW_R2D_N	
PCIE_FW_R2D	PCIE_90D	PCIE	PCIE_FW_R2D_C_P	
	PCIE_90D	PCIE	PCIE_FW_R2D_C_N	
PCIE_FW_D2R	PCIE_90D	PCIE	PCIE_FW_D2R_P	
	PCIE_90D	PCIE	PCIE_FW_D2R_N	
	PCIE_90D	PCIE	PCIE_FW_D2R_C_P	
	PCIE_90D	PCIE	PCIE_FW_D2R_C_N	
	PCIE_90D	PCIE	PCIE_EXCARD_R2D_P	
	PCIE_90D	PCIE	PCIE_EXCARD_R2D_N	
PCIE_EXCARD_R2D	PCIE_90D	PCIE	PCIE_EXCARD_R2D_C_P	
	PCIE_90D	PCIE	PCIE_EXCARD_R2D_C_N	
PCIE_EXCARD_D2R	PCIE_90D	PCIE	PCIE_EXCARD_D2R_P	
	PCIE_90D	PCIE	PCIE_EXCARD_D2R_N	
	PCIE_90D	PCIE	PCIE_FC_R2D_P	
	PCIE_90D	PCIE	PCIE_FC_R2D_N	
PCIE_FC_R2D	PCIE_90D	PCIE	PCIE_FC_R2D_C_P	
	PCIE_90D	PCIE	PCIE_FC_R2D_C_N	
PCIE_FC_D2R	PCIE_90D	PCIE	PCIE_FC_D2R_P	
	PCIE_90D	PCIE	PCIE_FC_D2R_N	
MCP_PE0_REFCLK	CLK_PCIE_100D	CLK_PCIE	PEG_CLK100M_P	8 16
	CLK_PCIE_100D	CLK_PCIE	PEG_CLK100M_N	8 16
MCP_PE1_REFCLK	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_MINI_P	16 34
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_MINI_N	16 34
MCP_PE4_REFCLK	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_FC_P	
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_FC_N	
MCP_PE2_REFCLK	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_FW_P	
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_FW_N	
MCP_PE3_REFCLK	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_EXCARD_P	
	CLK_PCIE_100D	CLK_PCIE	PCIE_CLK100M_EXCARD_N	
MCP_PEX_CLK_COMP		MCP_PEX_COMP	MCP_PEX_CLK_COMP	16
TMDS_IG_TXC	DP_100D	DISPLAYPORT	TMDS_IG_TXC_P	
TMDS_IG_TXC	DP_100D	DISPLAYPORT	TMDS_IG_TXC_N	
TMDS_IG_TXD	DP_100D	DISPLAYPORT	TMDS_IG_TXD_P<2..0>	
TMDS_IG_TXD	DP_100D	DISPLAYPORT	TMDS_IG_TXD_N<2..0>	
DP_ML	DP_100D	DISPLAYPORT	DP_ML_C_P<3..0>	6 61
DP_ML	DP_100D	DISPLAYPORT	DP_ML_C_N<3..0>	6 61
DP_ML	DP_100D	DISPLAYPORT	DP_ML_F_P<3..0>	35 61
DP_ML	DP_100D	DISPLAYPORT	DP_ML_F_N<3..0>	35 61
DP_ML	DP_100D	DISPLAYPORT	DP_ML_P<3..0>	60 61
DP_ML	DP_100D	DISPLAYPORT	DP_ML_N<3..0>	60 61
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_IG_AUX_CH_P	17 60
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_IG_AUX_CH_N	17 60
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_AUX_CH_C_P	6 35 60 61
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_AUX_CH_C_N	6 35 60 61
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_AUX_CH_SW_P	60
DP_AUX_CH	DP_100D	DISPLAYPORT	DP_AUX_CH_SW_N	60
MCP_HDMI_RSET	MCP_DV_COMP		MCP_HDMI_RSET	17 23
MCP_HDMI_VPROBE	MCP_DV_COMP		MCP_HDMI_VPROBE	17 23
LVDS_IG_A_CLK	LVDS_100D	LVDS	LVDS_IG_A_CLK_F_P	6 59
LVDS_IG_A_CLK	LVDS_100D	LVDS	LVDS_IG_A_CLK_F_N	6 59
LVDS_IG_A_CLK	LVDS_100D	LVDS	LVDS_IG_A_CLK_P	17 59
LVDS_IG_A_CLK	LVDS_100D	LVDS	LVDS_IG_A_CLK_N	17 59
LVDS_IG_A_DATA	LVDS_100D	LVDS	LVDS_IG_A_DATA_F_P<2..0>	59
LVDS_IG_A_DATA	LVDS_100D	LVDS	LVDS_IG_A_DATA_F_N<2..0>	59
LVDS_IG_A_DATA	LVDS_100D	LVDS	LVDS_IG_A_DATA_P<2..0>	6 17 59
LVDS_IG_A_DATA	LVDS_100D	LVDS	LVDS_IG_A_DATA_N<2..0>	6 17 59
LVDS_IG_A_DATA3	LVDS_100D	LVDS	LVDS_IG_A_DATA_P<3>	8 17
LVDS_IG_A_DATA3	LVDS_100D	LVDS	LVDS_IG_A_DATA_N<3>	8 17
LVDS_IG_B_CLK	LVDS_100D	LVDS	LVDS_IG_B_CLK_P	8 17
LVDS_IG_B_CLK	LVDS_100D	LVDS	LVDS_IG_B_CLK_N	8 17
LVDS_IG_B_DATA	LVDS_100D	LVDS	LVDS_IG_B_DATA_P<2..0>	8 17
LVDS_IG_B_DATA	LVDS_100D	LVDS	LVDS_IG_B_DATA_N<2..0>	8 17
LVDS_IG_B_DATA3	LVDS_100D	LVDS	LVDS_IG_B_DATA_P<3>	8 17
LVDS_IG_B_DATA3	LVDS_100D	LVDS	LVDS_IG_B_DATA_N<3>	8 17
MCP_IFPAB_RSET	MCP_DV_COMP		MCP_IFPAB_RSET	17 23
MCP_IFPAB_VPROBE			MCP_IFPAB_VPROBE	17 23
SATA_HDD_R2D	SATA_100D_HDD	SATA	SATA_HDD_R2D_C_P	19 36
	SATA_100D_HDD	SATA	SATA_HDD_R2D_C_N	19 36
	SATA_100D_HDD	SATA	SATA_HDD_R2D_P	6 36
	SATA_100D_HDD	SATA	SATA_HDD_R2D_N	6 36
	SATA_100D_HDD	SATA	SATA_HDD_R2D_UF_P	36
	SATA_100D_HDD	SATA	SATA_HDD_R2D_UF_N	36
SATA_HDD_D2R	SATA_100D_HDD	SATA	SATA_HDD_D2R_P	19 36
	SATA_100D_HDD	SATA	SATA_HDD_D2R_N	19 36
	SATA_100D_HDD	SATA	SATA_HDD_D2R_C_P	6 36
	SATA_100D_HDD	SATA	SATA_HDD_D2R_C_N	6 36
	SATA_100D_HDD	SATA	SATA_HDD_D2R_UF_P	36
	SATA_100D_HDD	SATA	SATA_HDD_D2R_UF_N	36
MCP_SATA_TERMP		SATA_TERMP	MCP_SATA_TERMP	19

MCP Constraints 1

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 67 OF 71

WWW.AliSaler.Com

PCI Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
PCI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD
CLK_PCI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PCI	*	=STANDARD	?
CLK_PCI	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.8.

LPC Bus Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
LPC_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD
CLK_LPC_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
LPC	*	6 MIL	?
CLK_LPC	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.9.1.

USB 2.0 Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
MCP_USB_RBIAS	*	=STANDARD	8 MIL	8 MIL	=STANDARD	=STANDARD	=STANDARD
USB_90D	*	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF	=90_OHM_DIFF

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
USB	*	=2x_DIELECTRIC	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
USB	TOP,BOTTOM	=4x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.10.1.

SMBus Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SMB_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SMB	*	=2x_DIELECTRIC	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.11.1.

HD Audio Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
HDA_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
HDA	*	=2x_DIELECTRIC	?
MCP_HDA_COMP	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.12.1.

SIO Signal Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
CLK_SLOW_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
CLK_SLOW	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.13.

SPI Interface Constraints

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
SPI_55S	*	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=55_OHM_SE	=STANDARD	=STANDARD

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
SPI	*	8 MIL	?

SOURCE: MCP79 Interface DG (DG-03328-001_v0D), Section 2.14.

NET_TYPE			
ELECTRICAL_CONSTRAINT_SET	PHYSICAL	SPACING	
MCP_DEBUG	PCI_55S	PCI	MCP_DEBUG<7..0> 6 12 18
PCI_AD	PCI_55S	PCI	PCI_AD<23..8>
PCI_AD24	PCI_55S	PCI	PCI_AD<24>
PCI_AD	PCI_55S	PCI	PCI_AD<31..25>
PCI_AD	PCI_55S	PCI	PCI_PAR
PCI_C_BE_L	PCI_55S	PCI	PCI_C_BE_L<3..0>
PCI_CNTL	PCI_55S	PCI	PCI_IRDY_L
PCI_CNTL	PCI_55S	PCI	PCI_DEVSEL_L
PCI_CNTL	PCI_55S	PCI	PCI_PERR_L
PCI_CNTL	PCI_55S	PCI	PCI_SERR_L
PCI_CNTL	PCI_55S	PCI	PCI_STOP_L
PCI_CNTL	PCI_55S	PCI	PCI_TRDY_L
PCI_CNTL	PCI_55S	PCI	PCI_FRAME_L
PCI_REQ0_L	PCI_55S	PCI	PCI_REQ0_L 18
PCI_GNT0_L	PCI_55S	PCI	PCI_GNT0_L
PCI_REQ1_L	PCI_55S	PCI	PCI_REQ1_L 18
PCI_GNT1_L	PCI_55S	PCI	PCI_GNT1_L
PCI_INTW_L	PCI_55S	PCI	PCI_INTW_L
PCI_INTX_L	PCI_55S	PCI	PCI_INTX_L
PCI_INTY_L	PCI_55S	PCI	PCI_INTY_L
PCI_INTZ_L	PCI_55S	PCI	PCI_INTZ_L
MCP_PCI_CLK2	CLK_PCI_55S	CLK_PCI	PCI_CLK33M_MCP_R 18
	CLK_PCI_55S	CLK_PCI	PCI_CLK33M_MCP 18
LPC_AD	LPC_55S	LPC	LPC_AD<3..0> 18 39 41
LPC_FRAME_L	LPC_55S	LPC	LPC_FRAME_L 18 39 41
LPC_RESET_L	LPC_55S	LPC	LPC_RESET_L 18 24
MCP_LPC_CLK0	CLK_LPC_55S	CLK_LPC	LPC_CLK33M_SMC_R 18 24
	CLK_LPC_55S	CLK_LPC	LPC_CLK33M_SMC 24 39
	CLK_LPC_55S	CLK_LPC	LPC_CLK33M_LPCPLUS 24 41
USB_EXTA	USB_90D	USB	USB_EXTA_P 8 19
	USB_90D	USB	USB_EXTA_N 8 19
	USB_90D	USB	USB_EXTA_MUXED_P 37
	USB_90D	USB	USB_EXTA_MUXED_N 37
	USB_90D	USB	CONN_USB_EXTA_P
	USB_90D	USB	CONN_USB_EXTA_N
USB_MINI	USB_90D	USB	USB_MINI_P 8 19
	USB_90D	USB	USB_MINI_N 8 19
USB_EXTD	USB_90D	USB	USB_EXTD_P 8 19
	USB_90D	USB	USB_EXTD_N 8 19
USB_CAMERA	USB_90D	USB	USB_CAMERA_P 8 19
	USB_90D	USB	USB_CAMERA_N 8 19
	USB_90D	USB	USB_CAMERA_CONN_P
	USB_90D	USB	USB_CAMERA_CONN_N
USB_BT	USB_90D	USB	USB_BT_P 8 19
	USB_90D	USB	USB_BT_N 8 19
	USB_90D	USB	CONN_USB2_BT_P
	USB_90D	USB	CONN_USB2_BT_N
USB_TPAD	USB_90D	USB	USB_TPAD_P 8 19
	USB_90D	USB	USB_TPAD_N 8 19
	USB_90D	USB	CONN_TPAD_USB_P
	USB_90D	USB	CONN_TPAD_USB_N
USB_IR	USB_90D	USB	USB_IR_P 8 19
	USB_90D	USB	USB_IR_N 8 19
USB_EXTB	USB_90D	USB	USB_EXTB_P 8 19
	USB_90D	USB	USB_EXTB_N 8 19
	USB_90D	USB	CONN_USB_EXTB_P
	USB_90D	USB	CONN_USB_EXTB_N
USB_EXCARD	USB_90D	USB	USB_EXCARD_P 8
	USB_90D	USB	USB_EXCARD_N 8
USB_EXTC	USB_90D	USB	USB_EXTC_P 8
	USB_90D	USB	USB_EXTC_N 8
MCP_USB_RBIAS	MCP_USB_RBIAS		MCP_USB_RBIAS_GND 19
SMBUS_MCP_0_CLK	SMB_55S	SMB	SMBUS_MCP_0_CLK 6 12 20 42
SMBUS_MCP_0_DATA	SMB_55S	SMB	SMBUS_MCP_0_DATA 6 12 20 42
SMBUS_MCP_1_CLK	SMB_55S	SMB	SMBUS_MCP_1_CLK 20 42
SMBUS_MCP_1_DATA	SMB_55S	SMB	SMBUS_MCP_1_DATA 20 42
HDA_BIT_CLK	HDA_55S	HDA	HDA_BIT_CLK 6 20 35
	HDA_55S	HDA	HDA_BIT_CLK_R 20
HDA_SYNC	HDA_55S	HDA	HDA_SYNC 6 20 35
	HDA_55S	HDA	HDA_SYNC_R 20
HDA_RST_L	HDA_55S	HDA	HDA_RST_R_L 20
	HDA_55S	HDA	HDA_RST_L 20 35
HDA_SDIN0	HDA_55S	HDA	HDA_SDIN0 6 20 35
	HDA_55S	HDA	HDA_SDIN_CODEC
HDA_SDOUT	HDA_55S	HDA	HDA_SDOUT 6 20 35
	HDA_55S	HDA	HDA_SDOUT_R 20
MCP_HDA_PULLDN_COMP		MCP_HDA_COMP	MCP_HDA_PULLDN_COMP 20
MCP_SUS_CLK	CLK_SLOW_55S	CLK_SLOW	PM_CLK32K_SUSCLK_R 20 24
	CLK_SLOW_55S	CLK_SLOW	PM_CLK32K_SUSCLK 24 39
SPI_CLK	SPI_55S	SPI	SPI_CLK_R 20 41
	SPI_55S	SPI	SPI_CLK 48
SPI_MOSI	SPI_55S	SPI	SPI_MOSI_R 20 41
	SPI_55S	SPI	SPI_MOSI 48
SPI_MISO	SPI_55S	SPI	SPI_MISO 20 41
	SPI_55S	SPI	SPI_MISO_R 48
SPI_CS0	SPI_55S	SPI	SPI_CS0_R_L 20 41
	SPI_55S	SPI	SPI_CS0_L
SPI_CLK	SPI_55S	SPI	SPI_CLK_MUX 41 48
SPI_MOSI	SPI_55S	SPI	SPI_MOSI_MUX 41 48
SPI_MISO	SPI_55S	SPI	SPI_MISO_MUX 41 48
SPI_CS0	SPI_55S	SPI	SPI_MLB_CS_L 41 48

MCP Constraints 2

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0
SCALE: NONE	SHT 68 OF 71	

WWW.AliSaler.Com

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
1TO1_DIFFPAIR	*	=STANDARD	=STANDARD	=STANDARD	=STANDARD	0.1 MM	0.1 MM

SMC SMBus Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE PHYSICAL	NET_TYPE SPACING		
SMBUS_SMC_A_S3_SCL	SMB_5SS	SMB	SMBUS_SMC_A_S3_SCL	42
SMBUS_SMC_A_S3_SDA	SMB_5SS	SMB	SMBUS_SMC_A_S3_SDA	42
SMBUS_SMC_B_S0_SCL	SMB_5SS	SMB	SMBUS_SMC_B_S0_SCL	42
SMBUS_SMC_B_S0_SDA	SMB_5SS	SMB	SMBUS_SMC_B_S0_SDA	42
SMBUS_SMC_0_S0_SCL	SMB_5SS	SMB	SMBUS_SMC_0_S0_SCL	42
SMBUS_SMC_0_S0_SDA	SMB_5SS	SMB	SMBUS_SMC_0_S0_SDA	42
SMBUS_SMC_BSA_SCL	SMB_5SS	SMB	SMBUS_SMC_BSA_SCL	6 42
SMBUS_SMC_BSA_SDA	SMB_5SS	SMB	SMBUS_SMC_BSA_SDA	6 42
SMBUS_SMC_MGMT_SCL	SMB_5SS	SMB	SMBUS_SMC_MGMT_SCL	42
SMBUS_SMC_MGMT_SDA	SMB_5SS	SMB	SMBUS_SMC_MGMT_SDA	42

SMBus Charger Net Properties

ELECTRICAL_CONSTRAINT_SET	NET_TYPE PHYSICAL	NET_TYPE SPACING	
CHGR_CSI	1TO1_DIFFPAIR		CHGR_CSI_P
	1TO1_DIFFPAIR		CHGR_CSI_N
CHGR_CSO	1TO1_DIFFPAIR		CHGR_CSO_P
	1TO1_DIFFPAIR		CHGR_CSO_N

SMC Constraints

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE NONE SHT 69 OF 71

WWW.AliSaler.Com

1	PP0V75_S0	NET_SPACING_TYPE=PWR 6 7
2	PP0V75_S3	NET_SPACING_TYPE=PWR 7
3	PP0V75_S3_MEM_VREFCA	NET_SPACING_TYPE=PWR 25 27 28 29 30
4	PP0V75_S3_MEM_VREFDQ	NET_SPACING_TYPE=PWR 25 27 28 29 30
5	PP18V5_DCIN	NET_SPACING_TYPE=PWR 6 49
6	PP18V5_DCIN_ONEWIRE	NET_SPACING_TYPE=PWR 49
7	PP18V5_G3H	NET_SPACING_TYPE=PWR 6 7
8	PP18V5_S5_CHGR_SW_R	NET_SPACING_TYPE=PWR 58
10	PP1V05_ENET_MCP_PLL_MAC	NET_SPACING_TYPE=PWR 17 22
9	PP1V05_RMGT	NET_SPACING_TYPE=PWR 7
12	PP1V05_S0	NET_SPACING_TYPE=PWR 6 7
11	PP1V05_S0_MCP_PEX_AVDD	NET_SPACING_TYPE=PWR 7 22
13	PP1V05_S0_MCP_PEX_AVDD_R	NET_SPACING_TYPE=PWR
14	PP1V05_S0_MCP_PEX_DVDD_R	NET_SPACING_TYPE=PWR
16	PP1V05_S0_MCP_PLL_CORE	NET_SPACING_TYPE=PWR 15 22
15	PP1V05_S0_MCP_PLL_FSB	NET_SPACING_TYPE=PWR 13 22
18	PP1V05_S0_MCP_PLL_NV	NET_SPACING_TYPE=PWR 20 22
17	PP1V05_S0_MCP_PLL_PEX	NET_SPACING_TYPE=PWR 16 22
19	PP1V05_S0_MCP_PLL_SATA	NET_SPACING_TYPE=PWR 19 22
21	PP1V05_S0_MCP_SATA_AVDD	NET_SPACING_TYPE=PWR 19 22
20	PP1V05_S5	NET_SPACING_TYPE=PWR 6 7
23	PP1V2_S0_FC_VDD	NET_SPACING_TYPE=PWR
6160	PP1V5_S0	NET_SPACING_TYPE=PP1V5_MEM 6 7
6161	PP1V5_S0_FC_AVDDL_F	NET_SPACING_TYPE=PWR
22	PP1V5_S0_FC_AVDDT_F	NET_SPACING_TYPE=PWR
24	PP1V5_S3	NET_SPACING_TYPE=PP1V5_MEM 6 7
25	PP1V8_S0	NET_SPACING_TYPE=PWR 6 7
26	PP2V_S0_MCPREG_REF	NET_SPACING_TYPE=PWR
28	PP3V3_LCDVDD_SW	NET_SPACING_TYPE=PWR 59
27	PP3V3_LCDVDD_SW_F	NET_SPACING_TYPE=PWR 6 59
30	PP3V3_RMGT	NET_SPACING_TYPE=PWR 7
29	PP3V3_S0	NET_SPACING_TYPE=PWR 6 7
31	PP3V3_S0_CPUTHMSNS_R	NET_SPACING_TYPE=PWR 45
33	PP3V3_S0_DPFUSE	NET_SPACING_TYPE=PWR 61
32	PP3V3_S0_DPPWR	NET_SPACING_TYPE=PWR 6 35 61
35	PP3V3_S0_FC_AVDD_F	NET_SPACING_TYPE=PWR
34	PP3V3_S0_HDD_F	NET_SPACING_TYPE=PWR 6 36
36	PP3V3_S0_IMVP6_3V3	NET_SPACING_TYPE=PWR 50
38	PP3V3_S0_LCD_F	NET_SPACING_TYPE=PWR 6 59
37	PP3V3_S0_MCPREG_VREF3	NET_SPACING_TYPE=PWR
39	PP3V3_S0_MCP_DAC	NET_SPACING_TYPE=GND 21 23
41	PP3V3_S0_MCP_PLL_USB	NET_SPACING_TYPE=PWR 19 22
40	PP3V3_S0_MCP_VPLL	NET_SPACING_TYPE=PWR 17 23
43	PP3V3_S3	NET_SPACING_TYPE=PWR 6 7
42	PP3V3_S3_AP_AUX	NET_SPACING_TYPE=PWR 6 34
44	PP3V3_S3_AP_AUX_F	NET_SPACING_TYPE=PWR 34
46	PP3V3_S0_MIC_F	NET_SPACING_TYPE=PWR 6 59
45	PP3V3_S5	NET_SPACING_TYPE=PWR 6 7
48	PP3V3_S5_AVREF_SMC	NET_SPACING_TYPE=PWR 39 40
47	PP3V3_S5_MCP	NET_SPACING_TYPE=PWR
49	PP3V3_S5_SMC_AVCC	NET_SPACING_TYPE=PWR 39
50	PP3V42G3H_SW	NET_SPACING_TYPE=PWR 49
52	PP3V42_G3H	NET_SPACING_TYPE=PWR 6 7
51	PP3V42_G3H_IPD_F	NET_SPACING_TYPE=PWR 6 38
54	PP3V42_G3H_SMCUSBMUX_R	NET_SPACING_TYPE=PWR 37
53	PP5V_S0	NET_SPACING_TYPE=PWR 6 7
55	PP5V_S0_IMVP6_VDD	NET_SPACING_TYPE=PWR 50
57	PP5V_S0_KBDLED_F	NET_SPACING_TYPE=PWR 6 38
56	PP5V_S0_MCPREG_VCC	NET_SPACING_TYPE=PWR
59	PP5V_S3	NET_SPACING_TYPE=PWR 6 7
58	PP5V_S3_CAMERA_F	NET_SPACING_TYPE=PWR 6 59
72	PP5V_S3_MCPREG_LDO	NET_SPACING_TYPE=PWR
71	PP5V_S3_TOPCASE_F	NET_SPACING_TYPE=PWR 6 38
73	PP5V_S3_USB2_EXTA	NET_SPACING_TYPE=PWR 37
74	PP5V_S3_USB2_EXTA_F	NET_SPACING_TYPE=PWR 6 35 37
76	PPBUS_G3H	NET_SPACING_TYPE=PWR 6 7
75	PPBUS_G3HRS5_VSENSE	NET_SPACING_TYPE=PWR 43
78	PPBUS_R_G3H	NET_SPACING_TYPE=PWR 6 7
77	PPBUS_S0_LCDBKLT_EN_DIV	NET_SPACING_TYPE=PWR 63
79	PPBUS_S0_LCDBKLT_EN_L	NET_SPACING_TYPE=PWR 63
81	PPBUS_S0_LCDBKLT_FUSED	NET_SPACING_TYPE=PWR 63
80	PPBUS_S0_LCDBKLT_PWR	NET_SPACING_TYPE=PWR 62 63
83	PPDCIN_G3H	NET_SPACING_TYPE=PWR 6 7
82	PPDCIN_G3H_R	NET_SPACING_TYPE=PWR 49
84	PPMCPCORE_S0	NET_SPACING_TYPE=PWR 6 7
86	PPVBATT_G3H_R	NET_SPACING_TYPE=PWR 49 70
85	PPVBAT_G3H_CHGR_OUT	NET_SPACING_TYPE=PWR 58 70
6102	PPVBATT_G3H_R	NET_SPACING_TYPE=PWR 49 70
6103	PPVBAT_G3H_CHGR_OUT	NET_SPACING_TYPE=PWR 58 70
6104	PPVBAT_G3H_CHGR_REG	NET_SPACING_TYPE=PWR 58
6105	PPVBAT_G3H_CHRGR_REG_0	NET_SPACING_TYPE=PWR 58
6106	PPVBAT_G3H_CHRGR_REG_R	NET_SPACING_TYPE=PWR 58
6108	PPVCORE_S0_CPU	NET_SPACING_TYPE=PWR 6 7
6109	PPVDCIN_G3H_PRE	NET_SPACING_TYPE=PWR 43 58
6107	PPVDCIN_G3H_PRE2	NET_SPACING_TYPE=PWR 58
6110	PPVDCIN_G3H_PRE_0	NET_SPACING_TYPE=PWR 58
6112	PPVDCIN_G3H_PRE_R	NET_SPACING_TYPE=PWR 58
6113	PPVIN_S5_IMVP6_VIN	NET_SPACING_TYPE=PWR 50
6111	PPVOUT_S0_LCDBKLT	NET_SPACING_TYPE=PWR 6 59 62
6114	PPVOUT_S0_LCDBKLT_SW	NET_SPACING_TYPE=PWR 62

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
PWR	*	=STANDARD	?
BUS2PWR_GND	*	0.228 MM	?

M96 Power and Ground Nets

SYNC_MASTER=(MASTER) SYNC_DATE=(MASTER)

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE NONE SHT 70 OF 71

WWW.AliSaler.Com

M96 BOARD-SPECIFIC SPACING & PHYSICAL CONSTRAINTS

BOARD LAYERS	BOARD AREAS	BOARD UNITS (MIL or MM)	ALLEGRO VERSION
TOP,ISL2,ISL3,ISL4,ISL5,ISL6,ISL7,ISL8,ISL9,ISL10,ISL11,ISL12,ISL13,BOTTOM	NO_TYPE,BGA_P1MM	MM	15.2

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
DEFAULT	*	Y	=50_OHM_SE	0.200 MM	30 MM	0 MM	0 MM
STANDARD	*	Y	=DEFAULT	=DEFAULT	12.7 MM	=DEFAULT	=DEFAULT

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
55_OHM_SE	TOP,BOTTOM	Y	0.210 MM	0.200 MM			
55_OHM_SE	ISL2,ISL13	Y	0.075 MM	0.075 MM	=STANDARD	=STANDARD	=STANDARD
55_OHM_SE	*	Y	0.066 MM	0.066 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
50_OHM_SE	TOP,BOTTOM	Y	0.250 MM	0.200 MM			
50_OHM_SE	ISL2,ISL13	Y	0.085 MM	0.085 MM	=STANDARD	=STANDARD	=STANDARD
50_OHM_SE	*	Y	0.066 MM	0.066 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
40_OHM_SE	TOP,BOTTOM	Y	0.350 MM	0.200 MM			
40_OHM_SE	ISL2,ISL13	Y	0.122 MM	0.122 MM	=STANDARD	=STANDARD	=STANDARD
40_OHM_SE	*	Y	0.110 MM	0.110 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
27P4_OHM_SE	TOP,BOTTOM	Y	0.215 MM	0.200 MM			
27P4_OHM_SE	*	Y	0.215 MM	0.215 MM	=STANDARD	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
70_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
70_OHM_DIFF	ISL2,ISL4,ISL5,ISL10,ISL11,ISL13	Y	0.132 MM	0.132 MM		0.200 MM	0.200 MM
70_OHM_DIFF	TOP,BOTTOM	Y	0.180 MM	0.180 MM		0.150 MM	0.150 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
90_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
90_OHM_DIFF	ISL2,ISL4,ISL5,ISL10,ISL11,ISL13	Y	0.085 MM	0.085 MM		0.250 MM	0.250 MM
90_OHM_DIFF	TOP,BOTTOM	Y	0.205 MM	0.200 MM		0.160 MM	0.160 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
100_OHM_DIFF	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
100_OHM_DIFF	ISL2,ISL4,ISL5,ISL10,ISL11,ISL13	Y	0.065 MM	0.065 MM		0.280 MM	0.280 MM
100_OHM_DIFF	TOP,BOTTOM	Y	0.179 MM	0.179 MM		0.200 MM	0.200 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
100_OHM_DIFF_HDD	*	N	=STANDARD	=STANDARD	=STANDARD	=STANDARD	=STANDARD
100_OHM_DIFF_HDD	ISL2,ISL4,ISL5,ISL10,ISL11,ISL13	Y	0.065 MM	0.065 MM		0.280 MM	0.280 MM
100_OHM_DIFF_HDD	TOP,BOTTOM	Y	0.179 MM	0.179 MM		0.200 MM	0.200 MM

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
40_OHM_SE_MEM	TOP,BOTTOM	Y	0.170 MM	0.110 MM	10 MM		
40_OHM_SE_MEM	ISL2,ISL13	Y	0.122 MM	0.066 MM	170 MM	=STANDARD	=STANDARD
40_OHM_SE_MEM	*	Y	0.110 MM	0.066 MM	170 MM	=STANDARD	=STANDARD

PHYSICAL_RULE_SET	LAYER	ALLOW ROUTE ON LAYER?	MINIMUM LINE WIDTH	MINIMUM NECK WIDTH	MAXIMUM NECK LENGTH	DIFFPAIR PRIMARY GAP	DIFFPAIR NECK GAP
1:1_DIFFPAIR	*	Y	=STANDARD	=STANDARD	=STANDARD	0.1 MM	0.1 MM

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
DEFAULT	*	0.1 MM	?
STANDARD	*	=DEFAULT	?
BGA_P1MM	*	=DEFAULT	?
BGA_P2MM	*	=DEFAULT	?
BGA_P3MM	*	=DEFAULT	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
1.5:1_SPACING	*	0.15 MM	?
2:1_SPACING	*	0.2 MM	?
2.5:1_SPACING	*	0.25 MM	?
3:1_SPACING	*	0.3 MM	?
4:1_SPACING	*	0.4 MM	?
4:1_SPACING	*	0.4 MM	?
2.28:1_SPACING	*	0.228 MM	?
1.1:1_SPACING	*	0.110 MM	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
2X_DIELECTRIC	TOP,BOTTOM	0.230 MM	?
3X_DIELECTRIC	TOP,BOTTOM	0.345 MM	?
4X_DIELECTRIC	TOP,BOTTOM	0.460 MM	?
5X_DIELECTRIC	TOP,BOTTOM	0.575 MM	?
2X_DIELECTRIC	ISL2,ISL13	0.110 MM	?
3X_DIELECTRIC	ISL2,ISL13	0.165 MM	?
4X_DIELECTRIC	ISL2,ISL13	0.220 MM	?
5X_DIELECTRIC	ISL2,ISL13	0.275 MM	?
2X_DIELECTRIC	*	0.120 MM	?
3X_DIELECTRIC	*	0.180 MM	?
4X_DIELECTRIC	*	0.240 MM	?
5X_DIELECTRIC	*	0.300 MM	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
GND	*	=STANDARD	?
PP1V5_MEM	*	=STANDARD	?

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
GND_P2MM	*	0.2 MM	1000
PWR_P2MM	*	0.2 MM	1000

SPACING_RULE_SET	LAYER	LINE-TO-LINE SPACING	WEIGHT
MCP_STATIC		=STANDARD	?

NET_SPACING_TYPE1	NET_SPACING_TYPE2	AREA_TYPE	SPACING_RULE_SET
*	*	BGA_P1MM	BGA_P1MM
MEM_CLK	*	BGA_P1MM	BGA_P2MM
CLK_FSB	*	BGA_P1MM	BGA_P2MM
CLK_LPC	*	BGA_P1MM	BGA_P2MM
CLK_PCI	*	BGA_P1MM	BGA_P2MM
CLK_PCIE	*	BGA_P1MM	BGA_P2MM
CLK_SLOW	*	BGA_P1MM	BGA_P2MM
FSB_DSTB	FSB_DSTB	BGA_P1MM	BGA_P3MM

NET_PHYSICAL_TYPE	AREA_TYPE	PHYSICAL_RULE_SET
MEM_50S	BGA_P1MM	STANDARD

M96 RULE DEFINITIONS

SYNC_MASTER=M97 SYNC_DATE=02/04/2008

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING

I TO MAINTAIN THE DOCUMENT IN CONFIDENCE

II NOT TO REPRODUCE OR COPY IT

III NOT TO REVEAL OR PUBLISH IN WHOLE OR PART

APPLE INC.

SIZE	DRAWING NUMBER	REV.
D	051-7631	2.3.0

SCALE: NONE SHT 71 OF 71

WWW.AliSaler.Com